



TÜV Rheinland Nederland B.V.  
The Netherlands

Postal address:  
P.O. Box 2220  
6802 CE ARNHEM

Parking and delivery:  
Westervoortsedijk 73  
6827 AV ARNHEM

[www.tuv.com/nl](http://www.tuv.com/nl)

T +31 88 888 7888

[Jaring.de.Wolff@nl.tuv.com](mailto:Jaring.de.Wolff@nl.tuv.com)

## Report

**Project number:** 89209169  
**Report number:** 89209169.01br

**Date**  
02/02/2016

**Project number**  
89209169

**Report number**  
89209169.01br

**Phone number client**

-

**Fax number client**

-

### **Received:**

A floor covering, marked as: “Luxury Vinyl Tile”;  
TÜV-reference: MT16-89079.01

### **Sampling procedure:**

The samples are selected by the applicant. The test house has had no influence on the sampling procedure.

The samples have been received on the 11/01/2015.

### **Order:**

Classification of burning behaviour according to EN 13501-1:2007+ A1:2009.

### **Article**

Luxury Vinyl Tile, OSB

Test methods: Ignitability of products subjected to direct impingement of flame (ISO 11925-2:2010/C1:2011) and determination of the burning behavior using a radiant heat source (ISO 9239-1:2010)

### **Appendix**

I : Flooring Radiant Panel Single Specimen Report – 8 pages

### **Results:**

See page three and four.

### **Appendix:**

See page five up to and including twelve.

## PRODUCT IDENTIFICATION

Name : **Luxury Vinyl Tile\***  
Product type : **OSB\***  
Type of colouring/patterning : **Wood\***  
Batch number : **20150930B\***  
Dimensions (Length\*Width\*Height) : **1212 \* 221 \* 5.0 mm\***  
Packaging : **2.142 m<sup>2</sup>\***  
Wear layer thickness : **0.7 mm\***  
Total thickness : **5.0 mm\***  
Total mass per unit area : **7 kg/m<sup>2</sup>\***

*\* Applicant's declaration*

**Date**  
02/02/2016

**Project number**  
89209169

**Report number**  
89209169.01br

**Article**  
Luxury Vinyl Tile, OSB

**Page**  
2/12



Figure 1. Picture of the received sample

Date  
02/02/2016

## TEST RESULTS

Project number  
89209169

**Ignitability of products subjected to direct impingement of flame**  
Method EN ISO 11925-2 :2010/C1:2011

Report number  
89209169.01br

Date of testing : 01/02/2016  
Conditioning time, climate :  $\geq 7$  days,  $23 \pm 2$  °C and  $50 \pm 5$  %  
Description of substrate : Fibre cement board,  $8 \pm 2$  mm,  $1800 \pm 200$  kg/m<sup>3</sup>  
conforming to EN 13238.  
Flame application : Surface.  
Flame application time : 15 seconds.

Article  
Luxury Vinyl Tile, OSB

Page  
3/12

Orientation:	Length			Width		
Total burning time <sup>1</sup>	15	15	15	15	15	15
Flame tip reaches 150 mm (s)	No	No	No	No	No	No
Extent of damaged area, length (mm)	52	58	57	54	58	54
Extent of damaged area, width (mm)	11	11	12	11	11	12
Material melts (yes/no)	Yes	Yes	Yes	Yes	Yes	Yes
Shrinks away <sup>2</sup> (yes/no)	No	No	No	No	No	No
Glowing <sup>3</sup> (sec)	No	No	No	No	No	No
Flaming debris (yes/no)	No	No	No	No	No	No
Ignition of filter paper (yes/no)	No	No	No	No	No	No

1 Inclusive a flame application time of 15 or 30 seconds with surface or edge impingement

2 Shrinks away from flame without being ignited

3 The time at which it occurs and its duration

**Determination of the burning behavior using a radiant heat source**  
Method EN ISO 9239-1:2010

Date of testing : 01/02/2016  
Conditioning time, climate :  $\geq 7$  days,  $23 \pm 2$  °C and  $50 \pm 5$  %  
Description of substrate : Fibre cement board,  $8 \pm 2$  mm,  $1800 \pm 200$  kg/m<sup>3</sup>  
conforming to EN 13238.  
Sampling procedure : By contractor.  
Description of cleaning used : None.  
Fixing method : None, sample is tested loose laid on the substrate.

Test specimen, orientation	Flame spread (cm)	CRF (kW/m <sup>2</sup> )	Peak light attenuation (%)	Smoke production (%.min)
1, Length	10.0	$\geq 10.9$	16.6	92
2, Width	10.0	$\geq 10.9$	16.5	95
3, Width	9.0	$\geq 10.9$	17.4	92
4, Width	9.0	$\geq 10.9$	20.3	100
<b>Mean, Width</b>	<b>9.3</b>	<b><math>\geq 10.9</math></b>	<b>18.1</b>	<b>96</b>

Specimen 1, 2, 3 and 4: There is flashing and transitory observed, no sustained flaming are observed.

Specimen 1, 2, 3 and 4: Extinguished naturally before the end of the test duration

## CONCLUSION

According to EN 13501-1:2007+ A1:2009 the tested sample of the aforementioned quality "Luxury Vinyl Tile", in relation to its reaction to fire behaviour is classified: **B<sub>n</sub>**.

The additional classification in relation to smoke production is: **s1**.

The aforementioned quality meets the requirement of reaction to fire classification:  
**B<sub>n</sub> – s1**

Date  
02/02/2016

Project number  
89209169

Report number  
89209169.01br

Article  
Luxury Vinyl Tile, OSB

Page  
4/12

The classification is valid for the following end use applications:

- End use substrates of classes A1 and A2-s1,d0 , for example fibre cement board.
- Any way of fixation, glued down or loose laid.

### Statements:

The test results only relate to the behaviour of the test specimens of the examined product under the particular conditions of the test in laboratory conditions; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use. The method might not be suitable if the product is exposed to much larger flames or heat radiant sources.

The validity of this report will expire directly after alterations or modifications of the examined product (combination)(s) and/or the criteria. This report shall not be reproduced, except in full, without the written approval of the testing laboratory.

This document does not represent type approval or certification of the product.

Author:

Mr. J. de Wolff



Review:

Mr. R. Boerboom



*All rights reserved.*

*No part of this report may be reproduced, provided to and/or examined by third parties, and/or published by print, photoprint, microfilm, in electronic form or any other means without the explicit previous written consent of TÜV Rheinland Nederland B.V. The results are based upon the samples received and have not to be representative for the total production. TÜV Rheinland Nederland B.V. had no influence on the sampling.*

*In case this report was drafted within the context of an assignment to TÜV Rheinland Nederland B.V., the rights and obligations of contracting parties are subject to the General Terms & Conditions for Advisory, Research and Certification assignments to TÜV Rheinland Nederland B.V. and/or the relevant agreement concluded between the contracting parties.*

© 2010 TÜV Rheinland Nederland B.V.

(End of report)

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology JRPSoft software

**Date**  
02/02/2016

**Project number**  
89209169

**Report number**  
89209169.01br

**Article**  
Luxury Vinyl Tile, OSB

**Page**  
5/12

### Flooring Radiant Panel Single Specimen Report

Standard : EN ISO 9239-1:2010  
 Laboratory : TÜV Rheinland Nederland B.V.  
 Sponsor : TÜV Rheinland Shanghai Co 89209169  
 Date of test : Feb 01 2016

Specimen description : OSB MT16-89079.01  
 Test name : Prod # 1  
 File name : D:\FRPFILES\16020001.CSV  
 Test number in series : 4

Flux calibration file name : C:\FRPSOFT2.9A\CALIB\FLX16001.CSV

Thickness (mm) :  
 Density (kg/m<sup>3</sup>) :

Test duration : 12 minutes 12 seconds (732 s)  
 Substrate used? : Yes  
 Substrate : Calcium silicate  
 Fixing method : none  
 Conditioned? : Yes  
 Conditioning temp. (°C) : 23  
 Conditioning RH (%) : 50

#### Test Results

Time to ignition : 2 minutes 05 seconds (125 s)  
 Time to flamesout : 12 minutes 09 seconds (729 s)  
 Extent of burning (mm) : 100  
 Critical flux at extinguishment (kW/m<sup>2</sup>) : >= 10.9  
 HF-10 (kW/m<sup>2</sup>) : 10.70  
 HF-20 (kW/m<sup>2</sup>) : Not calculated (test duration < 20 minutes)  
 HF-30 (kW/m<sup>2</sup>) : Not calculated (test duration < 30 minutes)  
 Flame spread at 10 minutes (mm) : 100  
 Flame spread at 20 minutes (mm) : Not measured  
 Flame spread at 30 minutes (mm) : Not measured  
 Peak light attenuation (%) : 16.56  
 Time to peak light attenuation : 5 minutes 06 seconds (306 s)  
 Total integrated smoke (%.min) : 92.45

**Potential classification** : A2(0)/B(0)  
**Smoke production classification** : s1

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRPSoft software


Date  
02/02/2016

Project number  
89209169

Report number  
89209169.01br

Article  
Luxury Vinyl Tile, OSB

Page  
10/12

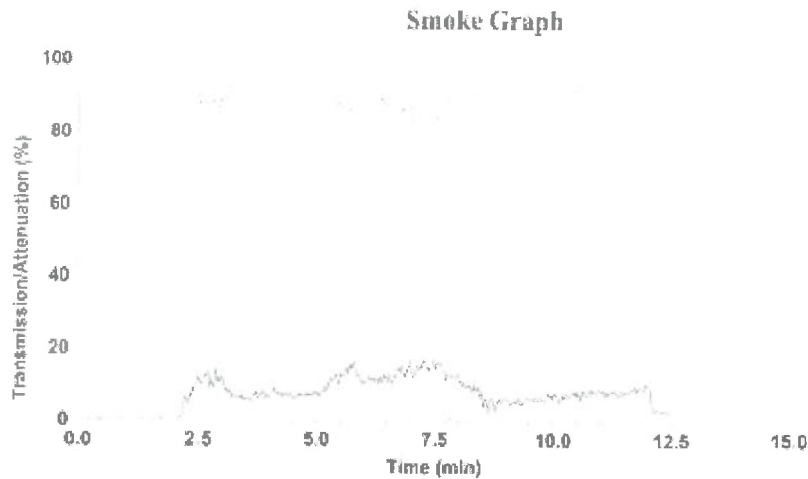

Test name : Cross #3  
File name : D:\FRPFILES\16020105.CSV

### Rake Results

Position (mm)	Time (s)	Flux (kW/m <sup>2</sup> )	Qsb (MJ/m <sup>2</sup> )	Position (mm)	Time (s)	Flux (kW/m <sup>2</sup> )	Qsb (MJ/m <sup>2</sup> )
60	374	11.3	4.233	510	-	3.6	-
110	-	10.5	-	560	-	3.0	-
160	-	9.9	-	610	-	2.5	-
210	-	9.1	-	660	-	2.2	-
260	-	8.1	-	710	-	1.8	-
310	-	7.2	-	760	-	1.6	-
360	-	6.2	-	810	-	1.4	-
410	-	5.3	-	860	-	1.2	-
460	-	4.4	-	910	-	1.1	-

### Comments

Specimen extinguished naturally.

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRPSoft software

Date  
02/02/2016


Project number  
89209169

Report number  
89209169.01br

Article  
Luxury Vinyl Tile, OSB

Page  
6/12

Page 3

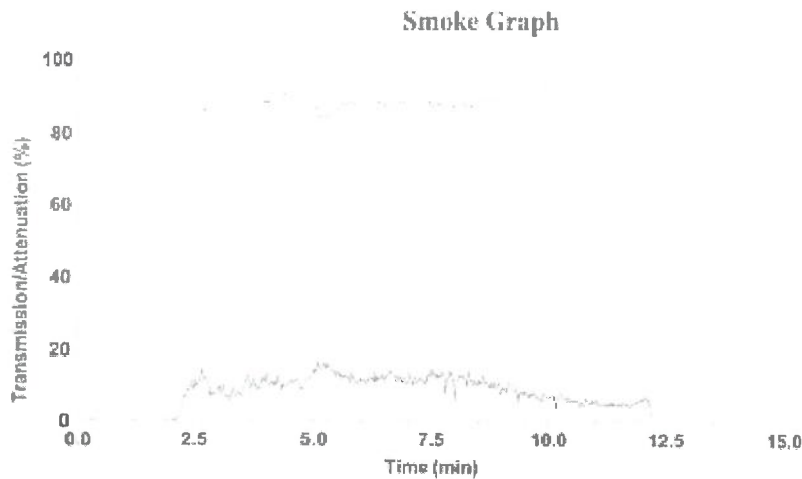

Test name : Prod # 1  
File name : D:\FRPFILES\16020001.CSV

### Rake Results

Position (mm)	Time (s)	Flux (kW/m <sup>2</sup> )	Qsb (MJ/m <sup>2</sup> )	Position (mm)	Time (s)	Flux (kW/m <sup>2</sup> )	Qsb (MJ/m <sup>2</sup> )
60	256	11.3	2.898	510	-	3.6	-
110	-	10.5	-	560	-	3.0	-
160	-	9.9	-	610	-	2.5	-
210	-	9.1	-	660	-	2.2	-
260	-	8.1	-	710	-	1.8	-
310	-	7.2	-	760	-	1.6	-
360	-	6.2	-	810	-	1.4	-
410	-	5.3	-	860	-	1.2	-
460	-	4.4	-	910	-	1.1	-

### Comments

Specimen extinguished naturally.

These results relate only to the behaviour of the specimen of the product under the particular conditions of the test, they are not intended to be the sole criteria for assessing the potential fire hazard of the product in use.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRPSoft software

**Date**  
02/02/2016

**Project number**  
89209169

**Report number**  
89209169.01br

**Article**  
Luxury Vinyl Tile, OSB

**Page**  
7/12

### Flooring Radiant Panel Single Specimen Report

Standard : EN ISO 9239-1:2010  
 Laboratory : TÜV Rheinland Nederland B.V.  
 Sponsor : TÜV Rheinland Shanghai Co 89209169  
 Date of test : Feb. 01 2016

Specimen description : OSB MT16-89079.01  
 Test name : Cross #2  
 File name : D:\FRPFILES\16020002.CSV  
 Test number in series : 4

Flux calibration file name : C:\FRP\SOFT2.9A\CALIB\FLEX16001.CSV

Thickness (mm) :  
 Density (kg/m<sup>3</sup>) :

Test duration : 12 minutes 10 seconds (730 s)  
 Substrate used? : Yes  
 Substrate : Calcium silicate  
 Fixing method : none  
 Conditioned? : Yes  
 Conditioning temp. (°C) : 23  
 Conditioning RH (%) : 50

#### Test Results

Time to ignition : 2 minutes 03 seconds (123 s)  
 Time to flameout : 12 minutes 08 seconds (728 s)  
 Extent of burning (mm) : 100  
 Critical flux at extinguishment (kW/m<sup>2</sup>) : >= 10.9  
 HF-10 (kW/m<sup>2</sup>) : 10.70  
 HF-20 (kW/m<sup>2</sup>) : Not calculated (test duration < 20 minutes)  
 HF-30 (kW/m<sup>2</sup>) : Not calculated (test duration < 30 minutes)  
 Flame spread at 10 minutes (mm) : 100  
 Flame spread at 20 minutes (mm) : Not measured  
 Flame spread at 30 minutes (mm) : Not measured  
 Peak light attenuation (%) : 16.53  
 Time to peak light attenuation : 7 minutes 13 seconds (433 s)  
 Total integrated smoke (%.min) : 94.98

Potential classification : A2(B)/B(fl)  
 Smoke production classification : s1

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.



## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRTSoft software

page 2


Date  
02/02/2016

Project number  
89209169

Report number  
89209169.01br

Article  
Luxury Vinyl Tile, OSB

Page  
8/12

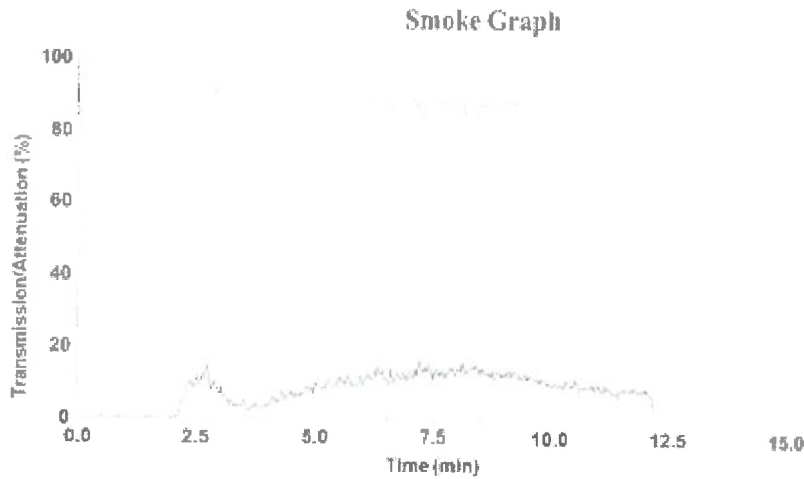

Test name : Cross #2  
File name : D:\FRFILES\16020002.CSV

### Rake Results

Position (mm)	Time (s)	Flux (kW/m²)	Qsb (MJ/m²)	Position (mm)	Time (s)	Flux (kW/m²)	Qsb (MJ/m²)
60	440	11.3	4.980	510	-	3.6	-
110	-	10.5	-	560	-	3.0	-
160	-	9.9	-	610	-	2.5	-
210	-	9.1	-	660	-	2.2	-
260	-	8.1	-	710	-	1.8	-
310	-	7.2	-	760	-	1.6	-
360	-	6.2	-	810	-	1.4	-
410	-	5.3	-	860	-	1.2	-
460	-	4.4	-	910	-	1.1	-

### Comments

Specimen extinguished naturally.

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRPSOFT software

PAGE 1

Date  
02/02/2016

Project number  
89209169

Report number  
89209169.01br

Article  
Luxury Vinyl Tile, OSB

Page  
9/12

### Flooring Radiant Panel Single Specimen Report

Standard : EN ISO 9239-1:2010  
Laboratory : TÜV Rheinland Nederland B.V.  
Sponsor : TÜV Rheinland Shanghai Co 89209169  
Date of test : Feb. 01 2016

Specimen description : OSB MT16-89079.01  
Test name : Cross #3  
File name : D:\FRFILES\16020005.CSV  
Test number in series : 4

Flux calibration file name : C:\FRPSOFT2.9A\CALIB\FLX16001.CSV

Thickness (mm) :  
Density (kg/m³) :

Test duration : 12 minutes 26 seconds (746 s)  
Substrate used? : Yes  
Substrate : Calcium silicate  
Fixing method : none  
Conditioned? : Yes  
Conditioning temp. (°C) : 23  
Conditioning RH (%) : 50

#### Test Results

Time to ignition : 2 minutes 04 seconds (124 s)  
Time to flameout : 12 minutes 22 seconds (742 s)  
Extent of burning (mm) : 90  
Critical flux at extinguishment (kW/m²) : >= 10.9  
HF-10 (kW/m²) : 10.86  
HF-20 (kW/m²) : Not calculated (test duration < 20 minutes)  
HF-30 (kW/m²) : Not calculated (test duration < 30 minutes)  
Flame spread at 10 minutes (mm) : 90  
Flame spread at 20 minutes (mm) : Not measured  
Flame spread at 30 minutes (mm) : Not measured  
Peak light attenuation (%) : 17.44  
Time to peak light attenuation : 7 minutes (420 s)  
Total integrated smoke (% min) : 91.57  
Potential classification : A2(f)/B(f)  
Smoke production classification : s1

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRPSoft software

Date  
02/02/2016

Project number  
89209169

Report number  
89209169.01br

Article  
Luxury Vinyl Tile, OSB

Page  
11/12

### Flooring Radiant Panel Single Specimen Report

Standard : EN ISO 9239-1:2010  
 Laboratory : TÜV Rheinland Nederland B.V.  
 Sponsor : TÜV Rheinland Shanghai Co 89209169  
 Date of test : Feb. 01 2016

Specimen description : OSB MT16-89079.01  
 Test name : Cross # 4  
 File name : D:\FRPFILES\16020006.CSV  
 Test number in series : 4

Flux calibration file name : C:\FRPSOFT2.9A\CALIB\FLX16001.CSV

Thickness (mm) :  
 Density (kg/m³) :

Test duration : 12 minutes 21 seconds (741 s)  
 Substrate used? : Yes  
 Substrate : Calcium silicate  
 Fixing method : None (loose laid)  
 Conditioned? : No  
 Conditioning temp. (°C) : N/A  
 Conditioning RH (%) : N/A

#### Test Results

Time to ignition : 2 minutes 03 seconds (123 s)  
 Time to flameout : 12 minutes 19 seconds (739 s)  
 Extent of burning (mm) : 90  
 Critical flux at extinguishment (kW/m²) : >= 10.9  
 HF-10 (kW/m²) : 10.86  
 HF-20 (kW/m²) : Not calculated (test duration < 20 minutes)  
 HF-30 (kW/m²) : Not calculated (test duration < 30 minutes)  
 Flame spread at 10 minutes (mm) : 90  
 Flame spread at 20 minutes (mm) : Not measured  
 Flame spread at 30 minutes (mm) : Not measured  
 Peak light attenuation (%) : 20.34  
 Time to peak light attenuation : 6 minutes 15 seconds (375 s)  
 Total integrated smoke (%.min) : 99.91

Potential classification : A2(f) / B(f)  
 Smoke production classification : s1

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRPSoft software

Date  
02/02/2016


Project number  
89209169

Report number  
89209169.01br

Article  
Luxury Vinyl Tile, OSB

Page  
12/12

page 2

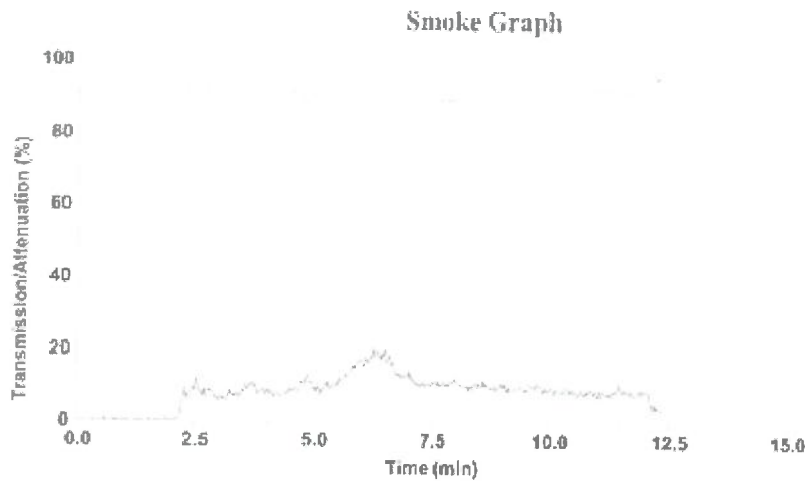

Test name : Cross # 4  
File name : D:\FRPFILES\16020006 CSV

### Rake Results

Position (mm)	Time (s)	Flux (kW/m <sup>2</sup> )	Qsb (MJ/m <sup>2</sup> )	Position (mm)	Time (s)	Flux (kW/m <sup>2</sup> )	Qsb (MJ/m <sup>2</sup> )
60	372	13.3	4.211	510	-	3.6	-
110	-	10.5	-	560	-	3.0	-
160	-	9.9	-	610	-	2.5	-
210	-	9.1	-	660	-	2.2	-
260	-	8.1	-	710	-	1.8	-
310	-	7.2	-	760	-	1.6	-
360	-	6.2	-	810	-	1.4	-
410	-	5.3	-	860	-	1.2	-
460	-	4.4	-	910	-	1.1	-

### Comments

Specimen extinguished naturally.

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

**Test Report**

Report Number:150831008SHF-BP-1

Applicant Name:

Original Report Date: October 12, 2015

**Sample Description:**

Product: PVC Floor Tile  
Model: 18"\*36"\*3.0mm\*0.5mm  
Samples Quantity: 15 pieces  
Sample ID: S150831008SHF-001~058, 105  
Date Received: 2015-08-31  
Date Test Conducted: 2015-09-01~2015-10-12

**Tests Conducted:**

Test Methods: See next pages.

**Conclusion:**

For details refer to attached page(s).  
The conclusions of this test report may not be used as part of the requirements for Intertek product certification.  
Authority to Mark must be issued for a product to become certified.

Should you have any queries about the test report, please contact:

**Approved by:****Checked by:****Prepared by:**

Sun Sun  
Assistant manager



Sally Xie  
Technical Supervisor



Jodie Zhou  
Senior Technical Supervisor

## Test Report

Report Number:150831008SHF-BP-1

### Test Items, Method and Results:

Table 1 ASTM F1700-13a

Test Item	Test Method	Test Result	Test Requirement	Verdict
Size	ASTM F2055-10	Claimed Length: 914.4mm Width: 457.2mm Tested Length: 915.1mm Width: 457.3mm	A tolerance of $\pm 0.4\text{mm}/305\text{mm}$	Pass
Thickness	ASTM F386-11	Claimed value: 3.0mm Average: 3.01mm Min.: 3.00mm Max.: 3.02mm	A tolerance of $\pm 0.13\text{mm}$	Pass
Thickness of wear layer	ASTM F410-08(2013)	0.51mm	Commercial, 0.5mm min	Pass
Squareness	ASTM F2055-10	Short edge Max.: 0.02mm/457mm Long edge Max.: 0.02mm/600mm	$\leq 0.25\text{mm}/305\text{mm}$	Pass
Residual indentation	ASTM F1914-07(2011)	Average: 1.4% Max. : 1.7%	Average $\leq 8\%$ Max $\leq 10\%$	Pass
Flexibility	ASTM F137-08(2013)	No crack when using $\Phi 25.4\text{mm}$ mandrel	No crack or break when using $\Phi 25.4\text{mm}$ mandrel	Pass
Dimension Stability	ASTM F2199-09(2014)	MD Max.: -0.21mm/305mm CMD Max.: -0.31mm/305mm	$\leq 0.51\text{mm}/305\text{mm}$	Pass
Resistance to Chemicals	ASTM F925-13	See Appendix B for details	No more than a slight change in surface dulling, surface attack or staining	Pass
Resistance to Heat	ASTM F1514-03(2013)	$\Delta E^* = 0.47$	$\Delta E^*$ shall not greater than 8.0 after 7 days exposure to $70^\circ\text{C}$	Pass
Resistance to Light	ASTM F1515-03(2008)	$\Delta E^* = 1.42$	$\Delta E^*$ shall not greater than 8.0 after a 300h exposure	Pass

## Test Report

Report Number:150831008SHF-BP-1

Table 2 Other Tests

Test Item	Test Method	Test Condition	Test Result			
			MD		CMD	
Coefficient of friction	ASTM D2394-05(2011)	Static Dry	0.59		0.57	
		Static Wet	0.68		0.69	
		Dynamic Dry	0.47		0.49	
		Dynamic Wet	0.57		0.58	
Coefficient of friction	ASTM C1028-07 <sup>e1</sup>	Dry	0.75			
		Wet	0.70			
Castor Chair	NALFA/ANSI LF-11	25000 revolutions	No obvious damage			
		35000 revolutions	No obvious damage			
Wear Resistance	ASTM D4060-14	CS-17 wheel 1kg load, 1000 revolutions	37.8 mg			
Static Load Resistance	ASTM F970-07(2011)	Load: 250 lb	Residual indentation: 0.02 mm			
Fungi Resistance <sup>1</sup>	ASTM G21-09	28 days, >85%RH, 28°C Test organisms: Aspergillus niger ATCC 9642, Penicillium pinophilum ATCC 11797, Chaetomium globosum ATCC 6205, Aureobasidium pullulans ATCC 15233 and Gliocladium virens ATCC 9645.	Rating 0, no growth			
Formaldehyde Content <sup>2</sup>	ASTM D6007-14	Chamber type: 0.225 m <sup>3</sup> stainless steel chamber Climatic conditions: 25° C, 50% R.H. Air exchange rate: 0.5 h <sup>-1</sup> Loading factor: 0.95 m <sup>2</sup> /m <sup>3</sup>	Not detected Detection limit=0.02 ppm			

## Note:

- The test was conducted at the external qualified facility, located at Guangzhou.

Rating evaluation: Observed Growth on Specimens


- 0 None
- 1 Traces of growth (less than 10 %)
- 2 Light growth (10 to 30 %)
- 3 Medium growth (30 to 60 %)
- 4 Heavy growth (60 % to complete coverage)

- The test sample was 5.0mm type. The material was the same as 3.0mm type claimed by the applicant.

**Test Report**

**Report Number:150831008SHF-BP-1**

**Appendix A: Sample photos**

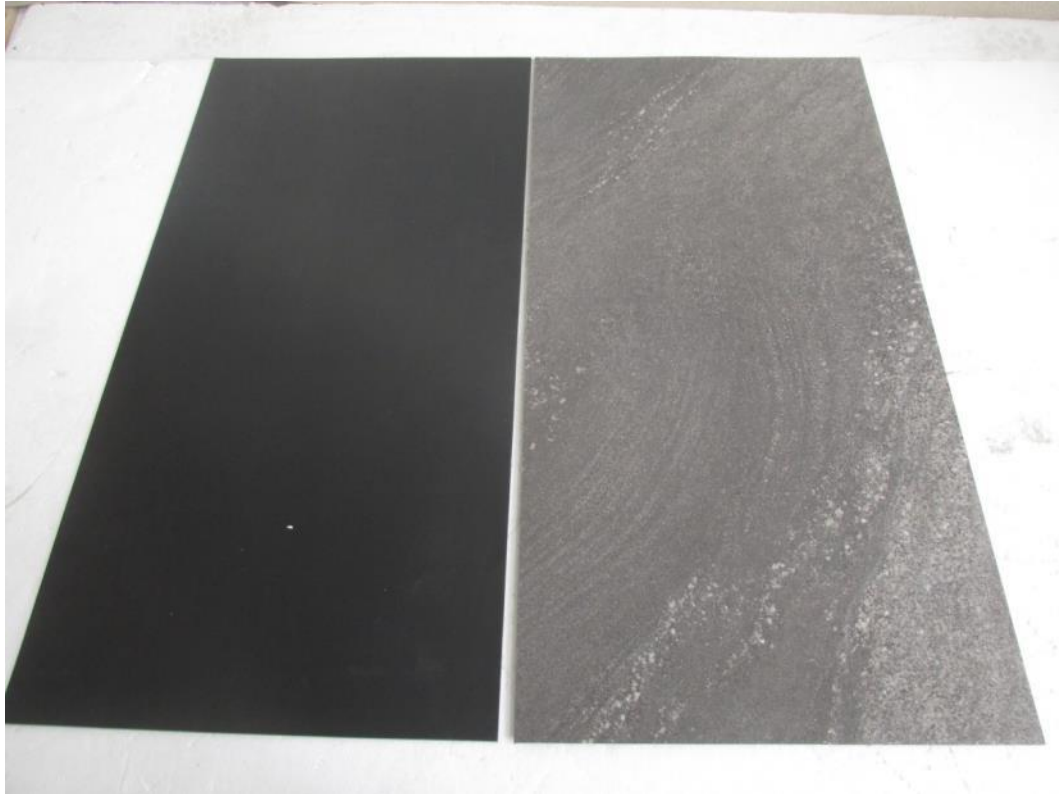


Sample received




**Test Report**


**Report Number:150831008SHF-BP-1**

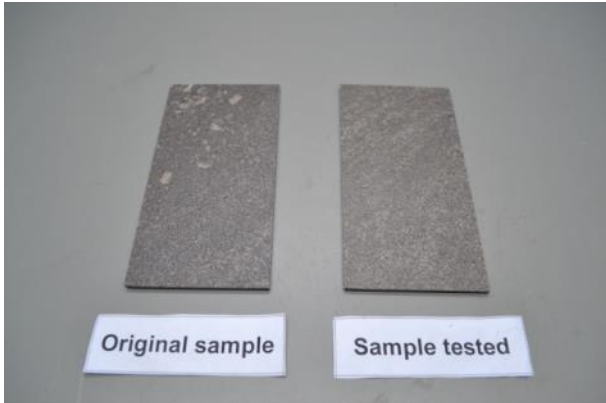

Resistance to light

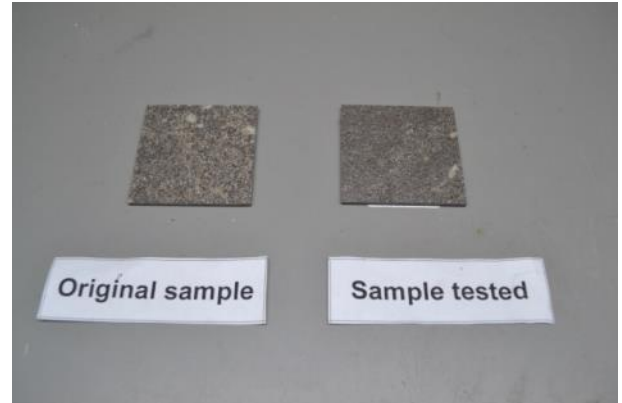

Resistance to heat

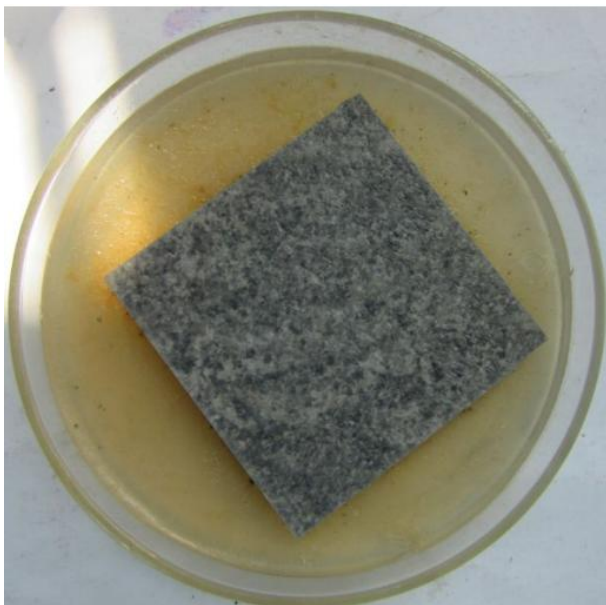

Fungi Resistance (after 28 days)

## Test Report

Report Number:150831008SHF-BP-1

### Appendix B Test result of Resistance to Chemicals

Reagent	Rating		
	Surface attack	Color change	Surface dulling
White vinegar (5% acetic acid)	0	0	0
Rubbing alcohol (70% isopropyl alcohol)	0	0	0
White mineral oil (medicinal grade)	0	0	0
Sodium hydroxide solution (5% NaOH)	0	0	0
Hydrochloric acid solution (5% HCl)	0	0	0
Sulfuric acid solution (5% H <sub>2</sub> SO <sub>4</sub> )	0	0	0
Household ammonia solution (5% NH <sub>4</sub> OH)	0	0	0
Household bleach (5.25% NaOCl)	0	0	0
Olive oil (light)	0	0	0
Kerozene (K1)	0	0	0
Unleaded gasoline (regular grade)	0	0	0
Phenol (5% active phenol)	0	0	0

According to ASTM F925-13, rating 0-3 represents:

0 = no change; 1 = slight change; 2 = moderate change; 3 = severe change.




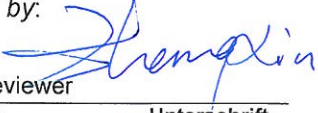
Surface Dulling - Indicating that the specimen suffered from a loss of gloss,

Color Change - Indicating that the specimen suffered discoloration or bleaching, or both, and

Surface Attack - Indicating that the specimen suffered surface damage such as softening, warping, swelling, blistering, peeling, raised or rough area.

\*\*\*\*\*  
The End of Report

*This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.*

<b>Prüfbericht-Nr.:</b> Test Report No.:	<b>15076111 001</b>	<b>Auftrags-Nr.:</b> Order No.:	<b>154063673</b>	Seite 1 von 14 Page 1 of 14
<b>Kunden-Referenz-Nr.:</b> Client Reference No.:	<b>N/A</b>	<b>Auftragsdatum:</b> Order date:	<b>21.08.2014</b>	
<b>Auftraggeber:</b> Client:				
<b>Prüfgegenstand:</b> Test item:	<b>PVC flooring</b> Luxury vinyl tile(LVT)			
<b>Bezeichnung / Typ-Nr.:</b> Identification / Type No.:	<b>Form: Tile</b> Total thickness: 2.0 mm - 5.0 mm; Mass per unit area: 3.853 kg/m <sup>2</sup> - 10.03 kg/m <sup>2</sup>			
<b>Auftrags-Inhalt:</b> Order content:	<b>Initial type testing report</b>			
<b>Prüfgrundlage:</b> Test specification:	<b>EN 14041:2004+AC:2005+AC:2006</b> Bodenbelag - Anforderung und Prüfung Flooring - Requirements and Test			
<b>Wareneingangsdatum:</b> Date of receipt:	<b>11.09.2014</b>			
<b>Prüfmuster-Nr.:</b> Test sample No.:	<b>A0000154063673-30</b>			
<b>Prüfzeitraum:</b> Testing period:	<b>11.09.2014 - 21.10.2014</b>			
<b>Ort der Prüfung:</b> Place of testing:	<b>TUV Rheinland: Shanghai, Nuremberg and Enschede</b>			
<b>Prüflaboratorium:</b> Testing laboratory:	<b>TÜV Rheinland (Shanghai) Co., Ltd.</b>			
<b>Prüfergebnis*:</b> Test result*:	<b>Pass</b>			
<b>geprüft von / tested by:</b>		<b>kontrolliert von / reviewed by:</b>		
<b>2014.11.10</b>	<b>Daniel Chen/PE</b>		<b>2014.11.10</b>	
<b>Datum</b> Date	<b>Name / Stellung</b> Name / Position	<b>Unterschrift</b> Signature	<b>Datum</b> Date	<b>Unterschrift</b> Signature
<b>Sonstiges / Other:</b> Reaction to fire is tested on TÜV Rheinland Nederland B.V. with Notified Body number 0336*. Formaldehyd Emission is tested on TÜV Rheinland LGA Products GmbH with Notified Body number 0197*. Attachment 1: Report for Reaction to fire: C-89206631-1. Attachment 2: Report for Formaldehyd Emission: 21223510(3124761). Attachment 3: Report for PCP: 0154063673a 001. *To be used for CE marking only.				
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> Condition of the test item at delivery:		<b>Prüfmuster vollständig und unbeschädigt</b> Test item complete and undamaged		
* Legende: 1 = sehr gut      2 = gut      3 = befriedigend      4 = ausreichend      5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n)      F(ail) = entspricht nicht o.g. Prüfgrundlage(n)      N/A = nicht anwendbar      N/T = nicht getestet Legend: 1 = very good      2 = good      3 = satisfactory      4 = sufficient      5 = poor P(ass) = passed a.m. test specification(s)      F(ail) = failed a.m. test specification(s)      N/A = not applicable      N/T = not tested				
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				


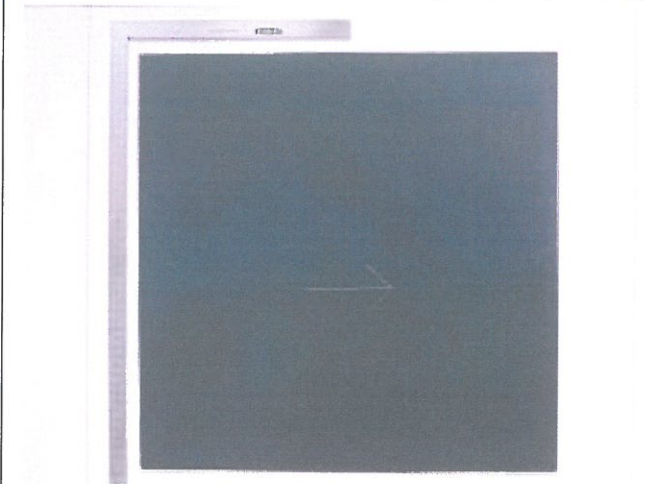
<b>Prüfbericht-Nr.: 15076111 001</b> Test Report No.:	Seite 2 von 14 Page 2 of 14
<b>Liste der verwendeten Prüfmittel</b> <b>List of used test equipment</b>	

<b>Prüfmittel</b> <i>Test equipment</i>	<b>Prüfmittel-Nr. / ID-Nr.</b> <i>Equipment No. / ID-No.</i>	<b>Nächste Kalibrierung</b> <i>Next calibration</i>
Micrometer	L068	01.07.2015
Digital Caliper	B0543	09.06.2015
Caliper	L900	01.11.2017
Linear-axis Test Stand	FN-56	01.10.2015
GC-MS	CHEM06	11.06.2016
ELECTRONIC BALANCE	CHEM175	10.07.2015
Flooring Radiant Panel Test Apparatus	Tui 107000060(Enschede)	14.10.2015
Sampling pump Desaga no. 12	06878(Nuremberg)	04.2015
Thermo-Hygrometer Luftt-1	07887(Nuremberg)	08.2015
Spektral-Photometer(UV-VIS) Perkin-Elmer, Lambda2	06911(Nuremberg)	02.2015
Test chamber no. 22	06949(Nuremberg)	Acc. Internal validation program

Prüfbericht-Nr.: 15076111 001  
Test Report No.:

Seite 3 von 14  
Page 3 of 14

**Produktbeschreibung**  
**Product description**

<b>1</b>	<b>Produktdetails</b> <i>Product details</i>	PVC flooring <i>Luxury vinyl tile(LVT)</i>
<b>2</b>	<b>Maße / Gewicht</b> <i>Dimensions / Weight</i>	Total Thickness: 2.0 mm - 5.0 mm Mass per unit area : 3.853 kg/m <sup>2</sup> - 10.03 kg/m <sup>2</sup>
<b>3</b>	<b>Bedienelemente</b> <i>Operating elements</i>	N/A
<b>4</b>	<b>Ausstattung / Zubehör</b> <i>Equipment / Accessories</i>	N/A
<b>5</b>	<b>Verwendete Materialien</b> <i>Used materials</i>	PVC
<b>6</b>	<b>Sonstiges</b> <i>Other</i>	N/A
Face		Back
		
Blank		Blank

<b>Prüfbericht-Nr.: 15076111 001</b> <i>Test Report No.:</i>		Seite 4 von 14 Page 4 of 14	
Absatz	EN 14041:2004+AC:2005+AC:2006	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation
1	<p><b>Scope</b></p> <p>This document specifies the health, safety and energy saving requirements for:</p> <ul style="list-style-type: none"> <li>● resilient floor coverings manufactured from plastics, linoleum, cork or rubber, excluding loose-laid mats;</li> <li>● textile floor coverings, excluding loose-laid mats and rugs;</li> <li>● laminate floor coverings;</li> <li>● floor panels for loose-laying.</li> </ul> <p>It also specifies procedures for testing for the evaluation of conformity of the products and the requirements for marking and labeling.</p> <p>The products are intended for use as floor coverings within a building or externally, according to the manufacturer's specifications.</p> <p>This document does not apply to floor coverings containing asbestos.</p> <p>This document does not specify requirements unrelated to health, safety and energy saving, which are covered in the separate European Standards for these products, listed in Annex A. To perform correctly, products covered by this standard require correct installation and maintenance. This document does not, however, cover installation or maintenance, but does give advice on minimizing slip hazards.</p>	The specimen is PVC floor coverings which are in the scope of the standard.	P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>
2	<p><b>Normative references</b></p> <p>→ See details in EN 14041:2004</p>		
3	<p><b>Terms and definitions</b></p> <p>→ See details in EN 14041:2004</p>		
4	<p><b>Requirements</b></p>		
4.1	<p><b>Requirements to fire</b></p>	See detailed clauses as below	P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>
4.1.1	<p><b>Specimen preparation and conditioning</b></p> <p>Preparation of test specimens shall be as defined in the appropriate fire test standard, except in the case of textile floor coverings where a washing and cleaning procedure similar to that used in practice may be</p>	The specimen preparation and conditioning was done according to the standard EN 13328.	P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>

Prüfbericht-Nr.: 15076111 001 Test Report No.:		Seite 5 von 14 Page 5 of 14	
Absatz	EN 14041:2004+AC:2005+AC:2006	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation
	<p>required to verify the durability of surface fire retardant treatments (see 4.1.3).</p> <p>The specimens shall be tested on one of the two standard substrates specified for floorings in EN 13238:2001 according to the intended end use. The composition of the product, including the presence of any fire retardant additive (if applicable), shall be declared by the manufacturer prior to type testing.</p>		
4.1.2	<p><b>Application rules</b></p> <p>If the specimens are tested using an adhesive, the test result is valid for the tested floor covering with that adhesive, or the generic adhesive type, in end use conditions.</p> <p>If the specimens are tested without using an adhesive, the test result is valid for the tested floor covering with and without using adhesives in end use conditions</p>		P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>
4.1.3	<p><b>Durability aspects</b></p> <p>Where required, textile floor coverings specimens to be tested shall be subjected to the laboratory spray extraction cleaning procedure according to ISO 11379 with the following modifications.</p> <ul style="list-style-type: none"> <li>● Clean the test specimens three times, with an interval of 2 h 15 min between cycles, each cleaning cycle consisting of two strokes:               <ul style="list-style-type: none"> <li>– for the first stroke use the spray extraction machine with simultaneous spray and extraction;</li> <li>– for the second stroke operate the machine only as an extraction machine.</li> </ul> </li> <li>● Carry out the first cleaning cycle using the reference cleaning solution at ambient temperature (25 °C 10 °C) and the second and third cleaning cycle with water at ambient temperature without any addition of chemicals.</li> <li>●</li> </ul>	PVC flooring is not applicable, and this test is required for textile floor covering only.	P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>
4.1.4	<p><b>Classification</b></p> <p>If a claim for reaction to fire performance is made, the floor covering (except as provided for below) shall be tested and classified according to the requirements of EN 13501-1:2002 and the resulting class and subclass (as appropriate to the class itself) shall be declared.</p> <p>If it is decided to make no claim for reaction to fire performance, i.e. it is decided to place a product or family of products on the market as Class Ffl, no testing</p>	Classification : B <sub>fl</sub> -s1*  *Details see the following reports: Test report of 2 mm products: TRN Report: 89206631.02br** Test report of 5 mm products: TRN Report: 89206631.01br**	P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>

Prüfbericht-Nr.: 15076111 001  
Test Report No.:

Seite 6 von 14  
Page 6 of 14

Absatz	EN 14041:2004+AC:2005+AC:2006	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

is required for this product of family of products.  
The products listed in Tables 1, 2 and 3, in the end uses identified in the tables, are classified without further testing (CWFT) in the classes shown and do not require testing in respect of these end uses and classes.  
*NOTE The provisions of Tables 1, 2 and 3 are subject to final approval by the Standing Committee for Construction.*  
*Users of this standard should, therefore, refer to the published EC Decisions, when they become available, to verify the details. Any changes necessary to these standards will be published in a Corrigendum.*

Classification report:  
TRN Report: C-89206631-1\*\*

*\*\*Remark: The test was performed in TÜV Rheinland Nederland B.V. with Notified Body number 0336.*

Table 1 – Classes of reaction to fire for laminate floor coverings, classified without further testing

Floor covering type <sup>1</sup>	Product detail	Minimum density (kg/m <sup>3</sup> )	Minimum overall thickness (mm)	Class <sup>2</sup> Floorings
Laminate floor coverings	Laminate floor coverings manufactured in accordance with EN 13329:2000	800	6,5	E <sub>L</sub>

<sup>1</sup> Floor covering loose laid over any wood based substrate of at least Class D-s2,d0 or any substrate of at least Class A2-s1,d0.

<sup>2</sup> Class as provided for in Table 2 in the Annex to Decision 2000/147/EC.

Table 2 – Classes of reaction to fire for textile floor coverings, classified without further testing

Floor covering type <sup>1</sup>	EN product standard	Class <sup>3</sup> Floorings
Non-FR machine-made wall-to-wall pile carpets and pile carpet tiles <sup>2</sup>	EN 1307	E <sub>L</sub>
Non-FR needled textile floor coverings without pile <sup>2</sup>	EN 1470	E <sub>L</sub>
Non-FR needled textile floor coverings with pile <sup>2</sup>	EN 13297	E <sub>L</sub>

<sup>1</sup> Floor covering glued or loose laid over a Class A2-s1,d0 substrate.

<sup>2</sup> Textile floor coverings having a total mass of max. 4,8 kg/m<sup>2</sup>, a minimum pile thickness of 1,8 mm (ISO 1766) and:

- a surface of 100% wool,
- a surface of 80% wool or more - 20% polyamide or less,
- a surface of 80% wool or more - 20% polyamide/polyester or less,
- a surface of 100% polyamide,
- a surface of 100% polypropylene and if with SBR-foam backing, a total mass of > 0,780 kg/m<sup>2</sup>. All polypropylene carpets with other foam backings are excluded.

<sup>3</sup> Class as provided for in Table 2 in the Annex to Decision 2000/147/EC.



Prüfbericht-Nr.: 15076111 001  
Test Report No.:

Seite 7 von 14  
Page 7 of 14

Absatz	EN 14041:2004+AC:2005+AC:2006	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

Table 3 – Classes of reaction to fire for resilient floor coverings, classified without further testing

Floor covering type <sup>1</sup>	EN product standard	Minimum mass (kg/m <sup>2</sup> )	Maximum mass (kg/m <sup>2</sup> )	Minimum overall thickness (mm)	Class <sup>2</sup> Floorings
Plain & decorative Linoleum	EN 548	2,3	4,9	2	E <sub>fl</sub>
Homogeneous and heterogeneous polyvinyl chloride floor coverings	EN 649	2,3	3,9	1,5	E <sub>fl</sub>
Polyvinyl chloride floor coverings with foam layer	EN 651	1,7	5,4	2	E <sub>fl</sub>
Polyvinyl chloride floor covering with cork-based backing	EN 652	3,4	3,7	3,2	E <sub>fl</sub>
Expanded (cushioned) polyvinyl chloride floor coverings	EN 653	1,0	2,8	1,1	E <sub>fl</sub>
Semi-flexible polyvinyl chloride tiles	EN 654	4,2	5,0	2	E <sub>fl</sub>
Linoleum on corkment backing	EN 687	2,9	5,3	2,5	E <sub>fl</sub>
Homogeneous and heterogeneous smooth rubber floor coverings with foam backing	EN 1816	3,4	4,3	4	E <sub>fl</sub>
Homogeneous and heterogeneous smooth rubber floor coverings	EN 1817	3,0	6,0	1,8	E <sub>fl</sub>
Homogeneous and heterogeneous relief rubber floor coverings	EN 12199	4,6	6,7	2,5	E <sub>fl</sub>

<sup>1</sup> Floor covering loose laid over any wood based substrate of at least Class D-s2,d0 or any substrate of at least Class A2-s1,d0.  
<sup>2</sup> Class as provided for in Table 2 in the Annex to Decision 2000/147/EC.

4.2	<p><b>Content of pentachlorophenol (PCP)</b></p> <p>Resilient, textile and laminate floor coverings shall not contain PCP or a derivative thereof as a component in the production process of the product or of its raw materials. In cases where verification is required, if the content is less than 5 ppm in the parts of the product affected by treatment, this requirement shall be considered to be met. For laminate floor coverings the method CEN/TR 148232, for textile floor coverings the method CEN/TS 144943 shall be used. For resilient floor coverings verification is not required.</p>	<p>Result: &lt;0.5 ppm*</p> <p>*Details see the following report: 0154063673a 001</p>	<p>P <input checked="" type="checkbox"/></p> <p>F <input type="checkbox"/></p> <p>N/A <input type="checkbox"/></p> <p>N/T <input type="checkbox"/></p>
4.3	<p><b>Formaldehyde emission</b></p> <p>When formaldehyde-containing materials have been added to the product as a part of the production process, the product shall be tested and classified into one of two classes: E1 or E2, as specified in Table 4 and Table 5.</p>	<p>Result: Class E1*</p> <p>*Details see the following report: 21223510(3124761) **</p>	<p>P <input checked="" type="checkbox"/></p> <p>F <input type="checkbox"/></p> <p>N/A <input type="checkbox"/></p> <p>N/T <input type="checkbox"/></p>

Prüfbericht-Nr.: 15076111 001  
Test Report No.:

Seite 8 von 14  
Page 8 of 14

Absatz	EN 14041:2004+AC:2005+AC:2006	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

The test requirement does not apply to floor coverings to which no formaldehyde-containing materials were added during production or post-production processing. These need not be classified, but may, without any testing, be declared as E1.

**NOTE:**

Products of class E1 can be used without causing an indoor air concentration greater than  $0,1 \times 10^{-6}$  (0,1 ppm) of formaldehyde.

**\*\*Remark:** The test was performed in TÜV Rheinland LGA Products GmbH with Notified Body number 0197.

Table 4 – Formaldehyde class E1

	Test method	Requirement
Initial type testing <sup>a</sup>	ENV 717-1	Release $\leq 0,124 \text{ mg/m}^3$
Factory production control	ENV 717-1	Release $\leq 0,124 \text{ mg/m}^3$
	EN 717-2	Release $\leq 3,5 \text{ mg/m}^2\text{h}$

<sup>a</sup> For established products, initial type testing may also be done on the basis of existing data with EN 717-2 testing, either from factory production control or from external inspection.

Table 5 – Formaldehyde class E2

	Test method	Requirement
Initial type testing	ENV 717-1	Release $> 0,124 \text{ mg/m}^3$
	EN 717-2	Release $> 3,5 \text{ mg/m}^2\text{h}$ to $\leq 8 \text{ mg/m}^2\text{h}$
Factory production control	ENV 717-1	Release $> 0,124 \text{ mg/m}^3$
	EN 717-2	Release $> 3,5 \text{ mg/m}^2\text{h}$ to $\leq 8 \text{ mg/m}^2\text{h}$

4.4

**Water-tightness**

Where required, resilient floor coverings shall meet the requirements of EN 13553.

The specimen is under water-tightness condition for 3 hours according to EN 13553.

P   
F   
N/A   
N/T

**Remark:**

1. The test according to EN 13553 is not applicable for product in tiles form. The test results are only for reference.
2. The test was performed for 3 hour with water to a level of 200mm above the surface of the specimen.
3. The test was performed with the water during 15 °C to 25 °C.

Prüfbericht-Nr.: 15076111 001 Test Report No.:		Seite 9 von 14 Page 9 of 14	
Absatz	EN 14041:2004+AC:2005+AC:2006	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation
		4. <i>The test was applied by client indecently.</i>	
4.5	<b>Slip resistance</b>	See detailed clauses as below.	P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>
4.5.1	<b>Classification</b>  If a claim for slip resistance is made, the floor covering intended to be used in dry and non-contaminated conditions shall have a dynamic coefficient of friction of $\geq 0,30$ when tested ex-factory under dry conditions in accordance with EN 13893 and shall be declared as technical class DS.  Although such floors may be subjected to occasional spillage and wet cleaning, the manufacturer does not guarantee the performance under these conditions.  If no claim for slip resistance is made, the floor coverings for which no performance has been determined shall be declared as technical class NPD.	Longitudinal dynamic coefficient of friction: $\mu_{\text{mean}}=0.35$ Horizontal dynamic coefficient of friction $\mu_{\text{mean}}=0.33$ $\mu_{\text{final}}=0.33$  Result: Class DS  Remark: 1. The test was performed in dry condition. 2. The floor covering intended to be used in dry and non-contaminated conditions shall have a dynamic coefficient of friction of $\geq 0,30$ when tested ex-factory under dry conditions in accordance with EN 13893 and shall be declared as technical class DS.	P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>
4.5.2	<b>Post-installation care</b>  The floor covering shall be treated, cleaned and maintained in accordance with the manufacturer's instructions.  <i>NOTE :</i> <i>Slip resistance characteristics on an installed floor covering can be affected by its installation, the surface treatment that is given to it when installed, dirt accumulation and its cleaning and maintenance. Guidance on the reduction of slip hazards is given in Annex C.</i>	The manufacturer's instruction provided mentioned the floor covering shall be smooth, flat, dry, clean and solid before post-installation.	P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>

Prüfbericht-Nr.: 15076111 001  
Test Report No.:

Seite 10 von 14  
Page 10 of 14

Absatz	EN 14041:2004+AC:2005+AC:2006	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation
4.6	<b>Electrical behaviour (static electricity)</b>	No declaration by the client.	P <input type="checkbox"/> F <input type="checkbox"/> N/A <input checked="" type="checkbox"/> N/T <input type="checkbox"/>
4.6.1	<b>Applicability</b>  For those floor coverings for which the manufacturer makes a claim for antistatic performance or electrical resistance.		P <input type="checkbox"/> F <input type="checkbox"/> N/A <input checked="" type="checkbox"/> N/T <input type="checkbox"/>
4.6.2	<b>Requirements</b>		P <input type="checkbox"/> F <input type="checkbox"/> N/A <input checked="" type="checkbox"/> N/T <input type="checkbox"/>
4.6.2.1	<b>Antistatic floor coverings</b>  The body voltage, measured in accordance with EN 1815 for resilient and laminate floor coverings or ISO 6356 for textile floor coverings, shall not exceed 2,0 kV when tested at 23 °C ± 1 °C and (25 ± 2) % relative humidity after conditioning the test specimens in the same atmosphere for seven days.		P <input type="checkbox"/> F <input type="checkbox"/> N/A <input checked="" type="checkbox"/> N/T <input type="checkbox"/>
4.6.2.2	<b>Electrical resistance</b>  ● Static dissipative floor coverings: The vertical resistance, measured in accordance with EN 1081 for resilient and laminate floor coverings or ISO 10965 for textile floor coverings, shall not exceed 10 <sup>9</sup> Ω. ● Conductive floor coverings: The vertical resistance, measured in accordance with EN 1081 for resilient and laminate floor coverings or ISO 10965 for textile floor coverings, shall not exceed 10 <sup>6</sup> Ω.		P <input type="checkbox"/> F <input type="checkbox"/> N/A <input checked="" type="checkbox"/> N/T <input type="checkbox"/>
4.6.3	<b>Durability aspects</b>  For textile antistatic floor coverings, a washing and cleaning procedure similar to that used in practice is required where applicable to verify the durability of surface antistatic treatments.  In such cases the specimens to be tested shall be subjected to the laboratory spray extraction cleaning procedure according to ISO 11379 with the following modifications.	PVC flooring is not applicable	P <input type="checkbox"/> F <input type="checkbox"/> N/A <input checked="" type="checkbox"/> N/T <input type="checkbox"/>

Prüfbericht-Nr.: 15076111 001  
Test Report No.:

Seite 11 von 14  
Page 11 of 14

Absatz	EN 14041:2004+AC:2005+AC:2006	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation
	<p>Clean the test specimens three times, with an interval of 2 h 15 min between cycles, each cleaning cycle consisting of two strokes:</p> <ul style="list-style-type: none"> <li>- for the first stroke use the spray extraction machine with simultaneous spray and extraction;</li> <li>- for the second stroke operate the machine only as an extraction machine.</li> </ul> <p>Carry out the first cleaning cycle using the reference cleaning solution at ambient temperature 25 °C 10 °C and the second and third cleaning cycle with water at ambient temperature without any addition of chemicals.</p> <p>After this, the test of 4.6.2 shall be repeated and the requirements met.</p> <p>NOTE Dirt and application of polymers can affect the antistatic and electrical properties of resilient and laminate floor coverings.</p>		
4.7	<p><b>Thermal conductivity</b></p> <p>When floor coverings are to be installed over an under-floor heating system the design thermal conductivity values given in EN 12524 shall be assumed for design calculation purposes. Alternatively, the thermal resistance measured in accordance with EN 12667 may be used.</p>	No declaration by the client.	P <input type="checkbox"/> F <input type="checkbox"/> N/A <input checked="" type="checkbox"/> N/T <input type="checkbox"/>
5	<p><b>Evaluation of conformity</b></p>	See detailed clauses as below.	P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>
5.1	<p><b>General</b></p> <p>The conformity of floor coverings with the requirements of this standard (including classes) shall be demonstrated by:</p> <ul style="list-style-type: none"> <li>- initial type testing;</li> <li>- Factory production control by the manufacturer, including product assessment (see Annex D).</li> </ul> <p>For the purposes of testing, floor coverings may be grouped into families (see 3.1), where it is considered that the results for a given characteristic from any one product within the family are valid for all other floor coverings within that family.</p>	<ul style="list-style-type: none"> <li>- ITT: see the relevant clauses of this test report.</li> <li>- FPC system is controlled by manufacturer according to AVCP 3 system of CPR.</li> </ul>	P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>

Prüfbericht-Nr.: 15076111 001  
Test Report No.:

Seite 12 von 14  
Page 12 of 14

Absatz Clause	EN 14041:2004+AC:2005+AC:2006 Anforderungen - Prüfungen / Requirements - Tests	Messergebnisse - Bemerkungen Measuring results - Remarks	Bewertung Evaluation
5.2	<b>Type testing</b>	See detailed clauses as below.	P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>
5.2.1	<b>Initial type testing</b>  Initial type testing shall be performed to show conformity with this standard. Tests previously performed in accordance with the provisions of this standard (same product, same characteristic(s), test method, sampling procedure, system of attestation of conformity, etc.) may be taken into account. In addition, initial type testing shall be performed at the beginning of the production of a new product type (unless a member of the same family) or at the beginning of a new method of production (where this may affect the stated properties).  Whenever a change occurs in the product, the raw material or supplier of the components, or the production process (subject to the definition of a family), which would change significantly one or more of the characteristics, the type tests shall be repeated for the appropriate characteristic(s).	<ul style="list-style-type: none"> <li>- Reaction to Fire</li> <li>- Emission of Formaldehyde</li> <li>- Content of PCP</li> <li>- Slipperiness</li> </ul>	P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>
5.2.2	<b>Sampling, testing and compliance criteria</b>  The sample taken for testing shall be representative of the available material. Compliance criteria are specified in Clause 4.  The results of all type tests shall be recorded and held by the manufacturer for at least 5 years.	Samples were taken by manufactory.  <i>Note: The results of all type tests shall be recorded and held by the manufacturer for at least 5 years.</i>	P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>
5.3	<b>Factory production control (FPC)</b>  The manufacturer shall establish, document and maintain an FPC system to ensure that the products placed on the market conform to the stated performance requirements. The FPC system shall consist of procedures, regular inspections and tests and/or assessments and the use of the results to control raw and other incoming materials or components, equipment, the production process and the product. Elements needed for the methods of FPC are given in Annex D.	FPC system is controlled by manufactory according to AVCP 3 system of CPR.	P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>

Prüfbericht-Nr.: 15076111 001  
Test Report No.:

Seite 13 von 14  
Page 13 of 14

Absatz	EN 14041:2004+AC:2005+AC:2006	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

6	<p><b>Marking and labeling</b></p> <p>Products which conform to the requirements of this document shall be clearly and indelibly marked by the manufacturer either on their package or on an adhesive label with the following information:</p> <ul style="list-style-type: none"> <li>a) The number and the year of this European Standard, i.e. EN 14041:2004;</li> <li>b) The manufacturer's or supplier's identification;</li> <li>c) The product name and batch number (possibly in code form).</li> </ul> <p>Where the requirements of ZA.3 give the same information as this clause, the requirements of this clause are considered to have been met.</p>	See CE Marking confirmed by manufactory.	P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>
---	--	--	---



No. 001CPR2013-07-01<sup>[1]</sup>



14

EN 14041:2004 + AC:2005 + AC:2006

Product	Luxury vinyl tile(LVT)
Requirements to fire	Bfl-s1
Content of pentachlorophenol(PCP)	<5ppm
Formaldehyde emission	E <sub>1</sub>
Slipperiness	DS

Remark: the label will be used as the insert paper in the package, or it will be printed out on the package.

**Remark:**

<sup>[1]</sup> Reference number of the Declaration of Performance. It's an identification number for each delivery batch of products and it is uniqueness and continuity between different batches.

<b>Prüfbericht-Nr.: 15076111 001</b> <i>Test Report No.:</i>		Seite 14 von 14 Page 14 of 14	
Absatz	<b>EN 14041:2004+AC:2005+AC:2006</b>	Messergebnisse - Bemerkungen	Bewertung
<i>Clause</i>	<i>Anforderungen - Prüfungen / Requirements - Tests</i>	<i>Measuring results - Remarks</i>	<i>Evaluation</i>
<b>A</b>	<b>Annex A (informative)</b>  <b>Other European Standards for resilient, textile and laminate floor Coverings</b>  → See details in EN 14041:2004		
<b>B</b>	<b>Annex B (normative)</b>  <b>Analysis of pentachlorophenol in floor coverings</b>  → See details in EN 14041:2004		
<b>C</b>	<b>Annex C (informative)</b>  <b>Guidance on the reduction of slip hazards</b>  → See details in EN 14041:2004		
<b>D</b>	<b>Annex D (normative)</b>  <b>Factory production control and reaction to fire testing</b>  → See details in EN 14041:2004		
<b>ZA</b>	<b>Annex ZA (informative)</b>  <b>Clauses of this European Standard addressing essential requirements or other provisions of EU Directives</b>  → See details in EN 14041:2004		

-END OF THE TEST REPORT-



Zulassungsstelle für Bauprodukte und Bauarten

Bautechnisches Prüfamt

Eine vom Bund und den Ländern  
gemeinsam getragene Anstalt des öffentlichen Rechts  
Mitglied der EOTA, der UEAtc und der WFTAO

## Allgemeine bauaufsichtliche Zulassung

Datum: 01.12.2015      Geschäftszeichen: II 42-1.156.603-115/15

Zulassungsnummer:  
**Z-156.603-1587**

Geltungsdauer  
vom: **1. Dezember 2015**  
bis: **14. April 2020**

Antragsteller:



Zulassungsgegenstand:  
**Heterogene PVC Bodenbeläge gemäß DIN EN 14041  
"Luxury vinyl tile"**

Diese allgemeine bauaufsichtliche Zulassung regelt die Verwendbarkeit der unter dem  
Zulassungsgegenstand genannten Produkte nach der harmonisierten Norm DIN EN 14041 für die  
Verwendung in Aufenthaltsräumen mit Nachweis des Emissionsverhaltens.

Der oben genannte Zulassungsgegenstand wird hiermit allgemein bauaufsichtlich zugelassen.  
Diese allgemeine bauaufsichtliche Zulassung umfasst fünf Seiten und eine Anlage.



## I ALLGEMEINE BESTIMMUNGEN

- 1 Mit der allgemeinen bauaufsichtlichen Zulassung ist die Verwendbarkeit bzw. Anwendbarkeit des Zulassungsgegenstandes im Sinne der Landesbauordnungen nachgewiesen.
- 2 Sofern in der allgemeinen bauaufsichtlichen Zulassung Anforderungen an die besondere Sachkunde und Erfahrung der mit der Herstellung von Bauprodukten und Bauarten betrauten Personen nach den § 17 Abs. 5 Musterbauordnung entsprechenden Länderregelungen gestellt werden, ist zu beachten, dass diese Sachkunde und Erfahrung auch durch gleichwertige Nachweise anderer Mitgliedsstaaten der Europäischen Union belegt werden kann. Dies gilt ggf. auch für im Rahmen des Abkommens über den Europäischen Wirtschaftsraum (EWR) oder anderer bilateraler Abkommen vorgelegte gleichwertige Nachweise.
- 3 Die allgemeine bauaufsichtliche Zulassung ersetzt nicht die für die Durchführung von Bauvorhaben gesetzlich vorgeschriebenen Genehmigungen, Zustimmungen und Bescheinigungen.
- 4 Die allgemeine bauaufsichtliche Zulassung wird unbeschadet der Rechte Dritter, insbesondere privater Schutzrechte, erteilt.
- 5 Hersteller und Vertreter des Zulassungsgegenstandes haben, unbeschadet weitergehender Regelungen in den "Besonderen Bestimmungen", dem Verwender bzw. Anwender des Zulassungsgegenstandes Kopien der allgemeinen bauaufsichtlichen Zulassung zur Verfügung zu stellen und darauf hinzuweisen, dass die allgemeine bauaufsichtliche Zulassung an der Verwendungsstelle vorliegen muss. Auf Anforderung sind den beteiligten Behörden Kopien der allgemeinen bauaufsichtlichen Zulassung zur Verfügung zu stellen.
- 6 Die allgemeine bauaufsichtliche Zulassung darf nur vollständig vervielfältigt werden. Eine auszugswweise Veröffentlichung bedarf der Zustimmung des Deutschen Instituts für Bautechnik. Texte und Zeichnungen von Werbeschriften dürfen der allgemeinen bauaufsichtlichen Zulassung nicht widersprechen. Im Falle von Unterschieden zwischen der deutschen Fassung der allgemeinen bauaufsichtlichen Zulassung und ihrer englischen Übersetzung hat die deutsche Fassung Vorrang. Übersetzungen der allgemeinen bauaufsichtlichen Zulassung müssen den Hinweis "Vom Deutschen Institut für Bautechnik nicht geprüfte Übersetzung der deutschen Originalfassung" enthalten.
- 7 Die allgemeine bauaufsichtliche Zulassung wird widerruflich erteilt. Die Bestimmungen der allgemeinen bauaufsichtlichen Zulassung können nachträglich ergänzt und geändert werden, insbesondere, wenn neue technische Erkenntnisse dies erfordern.

## II BESONDERE BESTIMMUNGEN

### 1 Zulassungsgegenstand und Anwendungsbereich

Die allgemeine bauaufsichtliche Zulassung gilt für die Herstellung und Verwendung der heterogenen PVC-Bodenbeläge "Luxury vinyl tile" mit CE-Kennzeichnung nach der Norm DIN EN 14041<sup>1</sup>.

Die Bodenbeläge erfüllen die Anforderungen der "Grundsätze zur gesundheitlichen Bewertung von Bauprodukten in Innenräumen"<sup>2</sup> und dürfen demgemäß in Aufenthaltsräumen verwendet werden.

### 2 Bestimmungen für das Bauprodukt

#### 2.1 Eigenschaften und Zusammensetzung

2.1.1 Die heterogenen PVC-Bodenbeläge müssen den Bestimmungen der Norm DIN EN 14041 sowie den Bestimmungen dieser allgemeinen bauaufsichtlichen Zulassung entsprechen. Die Bodenbeläge müssen bestehen aus

- der Oberflächenvergütung auf Polyurethan-Acrylatbasis,
- der transparenten Nuttschicht aus PVC,
- einem bedruckten Film aus PVC sowie
- dem Trägermaterial aus PVC.

Die Gesamtdicke der Bodenbeläge muss 2,0 mm bis 5,0 mm ( $\pm 10\%$ ) und das Gesamtflächengewicht 3720 g/m<sup>2</sup> bis 10380 g/m<sup>2</sup> ( $\pm 10\%$ ) betragen.

2.1.2 Die Bodenbeläge müssen die Anforderungen der "Grundsätze zur gesundheitlichen Bewertung von Bauprodukten in Innenräumen" insbesondere hinsichtlich der Emissionsbegrenzung flüchtiger und schwer flüchtiger organischer Verbindungen erfüllen.

2.1.3 Die chemische Zusammensetzung der Bodenbeläge muss mit der beim Deutschen Institut für Bautechnik hinterlegten übereinstimmen.

2.1.4 Der in Abschnitt 1 genannte Zulassungsgegenstand umfasst eine Gruppe von Einzelprodukten, deren unterschiedliche Dicken und Flächengewichte den in Abschnitt 2.1.1 angegebenen Bereichen entsprechen müssen; sie müssen ansonsten in Aufbau und chemischer Zusammensetzung identisch sein. Die Liste der Einzelprodukte ist der Zulassung in der Anlage 1 beigefügt.

#### 2.2 Herstellung und Kennzeichnung

##### 2.2.1 Herstellung

Bei der Herstellung der Bauprodukte sind die Bestimmungen des Abschnitts 2.1 einzuhalten.

##### 2.2.2 Kennzeichnung

Die Bauprodukte, ihre Verpackung oder die Beipackzettel müssen vom Hersteller zusätzlich zur CE-Kennzeichnung nach der Norm DIN EN 14041 mit dem Übereinstimmungszeichen (Ü-Zeichen) nach den Übereinstimmungszeichen-Verordnungen der Länder gekennzeichnet werden. Die Kennzeichnung darf nur erfolgen, wenn die Voraussetzungen nach Abschnitt 2.3 erfüllt sind.

<sup>1</sup> DIN EN 14041:2008-05: Elastische, textile und Laminat-Bodenbeläge bzw. die in den Mitgliedsstaaten in

<sup>2</sup> nationale Normen umgesetzte EN 14041:2004/AC:2005/AC:2006

des DIBt, <http://www.dibt.de>

Eine Bewertung des Geruches erfolgt im Rahmen der Zulassung nicht.

Die Kennzeichnung muss deutlich lesbar folgende Angaben enthalten:

- "Produktname"
- Übereinstimmungszeichen (Ü-Zeichen) mit Namen des Herstellers und des Herstellwerks (kann auch verschlüsselt angegeben werden), Zulassungsnummer und Bezeichnung der Zertifizierungsstelle
- "Emissionsgeprüftes Bauprodukt nach DIBt-Grundsätzen"

## 2.3

### Übereinstimmungsnachweis

#### 2.3.1 Allgemeines

Die Bestätigung der Übereinstimmung der Bauprodukte mit den Bestimmungen dieser allgemeinen bauaufsichtlichen Zulassung muss für jedes Herstellwerk mit einem Übereinstimmungszertifikat auf der Grundlage einer werkseigenen Produktionskontrolle und einer regelmäßigen Fremdüberwachung einschließlich einer Erstprüfung der Bauprodukte nach Maßgabe der folgenden Bestimmungen erfolgen.

Für die Erteilung des Übereinstimmungszertifikats und die Fremdüberwachung einschließlich der dabei durchzuführenden Produktprüfungen hat der Hersteller der Bauprodukte eine hierfür anerkannte Zertifizierungsstelle sowie eine hierfür anerkannte Überwachungsstelle einzuschalten.

Die Erklärung, dass ein Übereinstimmungszertifikat erteilt ist, hat der Hersteller durch Kennzeichnung der Bauprodukte mit dem Übereinstimmungszeichen (Ü-Zeichen) unter Hinweis auf den Verwendungszweck abzugeben.

Dem Deutschen Institut für Bautechnik ist von der Zertifizierungsstelle eine Kopie des von ihr erteilten Übereinstimmungszertifikats zur Kenntnis zu geben.

#### 2.3.2

### Werkseigene Produktionskontrolle

Es gelten die Regelungen der Norm DIN EN 14041 sowie die im Folgenden aufgeführten Bestimmungen.

In jedem Herstellwerk ist eine werkseigene Produktionskontrolle einzurichten und durchzuführen. Unter werkseigener Produktionskontrolle wird die vom Hersteller vorzunehmende kontinuierliche Überwachung der Produktion verstanden, mit der dieser sicherstellt, dass das von ihm hergestellte Bauprodukt den Bestimmungen dieser allgemeinen bauaufsichtlichen Zulassung entspricht.

Die Ergebnisse der werkseigenen Produktionskontrolle sind aufzuzeichnen und auszuwerten. Die Aufzeichnungen müssen mindestens folgende Angaben enthalten:

- Bezeichnung des Bauprodukts bzw. des Ausgangsmaterials und der Bestandteile
- Art der Kontrolle oder Prüfung
- Datum der Herstellung und der Prüfung des Bauprodukts bzw. des Ausgangsmaterials oder der Bestandteile
- Ergebnis der Kontrollen und Prüfungen und, soweit zutreffend, Vergleich mit den Anforderungen
- Unterschrift des für die werkseigene Produktionskontrolle Verantwortlichen

Die Aufzeichnungen sind mindestens fünf Jahre aufzubewahren und der für die Fremdüberwachung eingeschalteten Überwachungsstelle vorzulegen. Sie sind dem Deutschen Institut für Bautechnik und der zuständigen obersten Bauaufsichtsbehörde auf Verlangen vorzulegen. Bei ungenügendem Prüfergebnis sind vom Hersteller unverzüglich die erforderlichen Maßnahmen zur Abstellung des Mangels zu treffen. Bauprodukte, die den Anforderungen nicht entsprechen, sind so zu handhaben, dass Verwechslungen mit übereinstimmenden ausgeschlossen werden. Nach Abstellung des Mangels ist - soweit technisch möglich und zum Nachweis der Mängelbeseitigung erforderlich - die betreffende Prüfung unverzüglich und wiederholen.

### 2.3.3 Fremdüberwachung

In jedem Herstellwerk ist die werkseigene Produktionskontrolle durch eine Fremdüberwachung regelmäßig zu überprüfen, mindestens jedoch einmal jährlich. Dabei ist sicherzustellen, dass im Überwachungszeitraum die geprüften Einzelprodukte repräsentativ für die gesamte Gruppe sind. Im Rahmen der Fremdüberwachung ist eine Erstprüfung des Bauprodukts durchzuführen, und es können auch Proben für Stichprobenprüfungen entnommen werden. Die Probenahme und Prüfungen obliegen jeweils der anerkannten Überwachungsstelle. Die Ergebnisse der Zertifizierung und Fremdüberwachung sind mindestens fünf Jahre aufzubewahren. Sie sind von der Zertifizierungsstelle bzw. der Überwachungsstelle dem Deutschen Institut für Bautechnik und der zuständigen obersten Bauaufsichtsbehörde auf Verlangen vorzulegen.

Zum Nachweis des Emissionsverhaltens gemäß den "Grundsätzen zur gesundheitlichen Bewertung von Bauprodukten in Innenräumen" ist einmal jährlich eine 3-tägige Emissionsprüfung oder eine adäquate Kurzzeitprüfung, die mit dem DIBt abzustimmen ist, durchzuführen. Im Rahmen der vorzugsweise letzten Fremdüberwachung ist eine vollständige Prüfung des Emissionsverhaltens (28 Tage oder entsprechend der Abbruchkriterien 3 oder 7 Tage<sup>3</sup>) durchzuführen. Die Hinweise für die Entnahme von Bodenbelagsproben im Werk für die Emissionsprüfung sind zu beachten<sup>3</sup>.

Weitere Maßnahmen und Prüfungen im Rahmen der Fremdüberwachung sind mit dem DIBt abzustimmen.

Wolfgang Misch  
Referatstleiter



Beglaubigt  
24

Anlage 1

Zulassungsgegenstand: "Luxury vinyl tile"

Auflistung der in der Zulassung geregelten Einzelprodukte:

Lfd. Nr.	Name des Bodenbelags
1	JH-LVT



## CLASSIFICATION OF REACTION TO FIRE IN ACCORDANCE WITH EN 13501-1:2007

Verie: 20140220

Sponsor:



Prepared by:

TÜV Rheinland Nederland B.V.  
Josink Esweg 10  
7545 PN  
ENSCHDEDE  
The Netherlands

Notified Body number:

0336 \*

Product name:

Luxury Vinyl Tile

Classification report number: C-89206631-1

Project number:

89206631

Issue number:

1<sup>st</sup>

Date of issue:

02-10-2014

This classification report consists of 6 pages and may only be used or reproduced in its entirety.

*\* To be used for CE marking only.*

*All rights reserved.*

*No part of this report may be reproduced, provided to and/or examined by third parties, and/or published by print, photograph, microfilm, in electronic form or any other means without the explicit previous written consent of TÜV Rheinland Nederland B.V.*

*In case this report was drafted within the context of an assignment to TÜV Rheinland Nederland B.V., the rights and obligations of contracting parties are subject to the General Terms & Conditions for Advisory, Research and Certification assignments to TÜV Rheinland Nederland B.V. and/or the relevant agreement concluded between the contracting parties.*

© 2010 TÜV Rheinland Nederland B.V.

Headoffice:  
Boogschuiterstraat 11A  
P.O. Box 541  
7300 AM Apeldoorn

Locations:  
Vissenstraat 6  
P.O. Box 541  
7324 AL Apeldoorn

Tel. +31 (0)88 888 7 888  
Fax +31 (0)88 888 7 879

Eiberkamp 10  
P.O. Box 37  
9350 AA Leek

Tel. +31 (0)88 888 7 888  
Fax: +31 (0)594 504 804

Josink Esweg 10  
P.O. Box 337  
7500 AH Enschede

Tel. +31 (0)88 888 7 888  
Fax +31 (0)88 888 7 859

TÜV Rheinland Nederlandanc  
B.V. is a registered comp  
at the Dutch Chamber of  
Commerce under number  
27288788  
Info@nl.tuv.com  
www.tuv.com/nl



**CONTENTS:**

<b>1</b>	<b>Introduction</b>	<b>3</b>
<b>2</b>	<b>Details of classified product</b>	<b>3</b>
2.1	General	3
2.2	Product description	3
<b>3</b>	<b>Test reports and test results in support of classification</b>	<b>3</b>
3.1	Test reports references	3
3.2	Test results	4
<b>4</b>	<b>Classification and fiels of application</b>	<b>5</b>
4.1	Reference of classification	5
4.2	Classification	5
4.3	Field of application	5
<b>5</b>	<b>Limitations</b>	<b>6</b>
<b>6</b>	<b>Approval of document</b>	<b>6</b>





## 1 Introduction

This classification report defines the classification assigned to Luxury Vinyl Tile in accordance with the procedures given in EN 13501-1:2007.

## 2 Details of classified product

### 2.1 General

The product, **Luxury Vinyl Tile**, is defined as a heterogeneous PVC floor covering in accordance with EN-ISO 10582:2012\*.

*\* To be used for CE marking.*

### 2.2 Product description

The product, **Luxury Vinyl Tile**, is described below and is described in the test reports provided in support of classification listed in 3.1.

Product description : Luxury Vinyl Tile.

Floor covering type : Heterogeneous polyvinyl chloride floor coverings in accordance with the requirements of EN-ISO 10582.

Product name : Luxury Vinyl Tile

Nominal thickness : 2.0 – 5.0 mm

Mass per unit area : 3.853 – 10.03 kg/m<sup>2</sup>

## 3 Test reports and test results in support of classification

### 3.1 Test reports references

Name of laboratory	Name of sponsor	Test report no.	Test method
TÜV Rheinland Nederland B.V.	Chiping Jiahua Plastics Co. Ltd.	89206631.01br	EN-ISO 11925-2:2010
			EN-ISO 9239-1:2010
TÜV Rheinland Nederland B.V.	Chiping Jiahua Plastics Co. Ltd.	89206631.02br	EN-ISO 11925-2:2010
			EN-ISO 9239-1:2010



### 3.2 Test results

Product name : Luxury Vinyl Tile  
 Test report no. : 89206631.01br  
 Nominal thickness : 5.0 mm  
 Mass per unit area : 10.03 kg/m<sup>2</sup>

Test method and number	Parameter	No. of tests	Results	
			Continuous parameter – mean	Compliance with parameter
Reaction to fire -Single-flame source test, 15 s exposure time. EN-ISO 11925-2:2010	Flame spread (Fs) ≤ 150 mm	6	≤150 mm	Compliant
Reaction to fire tests for floorings – Radiant heat source. EN-ISO 9239-1:2010	Smoke production s1: Smoke ≤ 750 %·minutes	3	62 %·minutes	Compliant

Product name : Luxury Vinyl Tile  
 Test report no. : 89206631.02br  
 Nominal thickness : 2.0 mm  
 Mass per unit area : 3.853 kg/m<sup>2</sup>

Test method and number	Parameter	No. of tests	Results	
			Continuous parameter – mean	Compliance with parameter
Reaction to fire -Single-flame source test, 15 s exposure time. EN-ISO 11925-2:2010	Flame spread (Fs) ≤ 150 mm	6	≤150 mm	Compliant
Reaction to fire tests for floorings – Radiant heat source. EN-ISO 9239-1:2010	Smoke production s1: Smoke ≤ 750 %·minutes	3	126 %·minutes	Compliant



## 4 Classification and fields of application

### 4.1 Reference of classification

This classification has been carried out in accordance with EN 13501-1:2007.

### 4.2 Classification

The product, **Luxury Vinyl Tile**, in relation to its reaction to fire behavior is classified: **B<sub>fl</sub>**  
The additional classification in relation to smoke production is: **s1**

**Reaction to fire classification : B<sub>fl</sub> – s1**

### 4.3 Field of application

This classification is valid for the following product parameters:

Total thickness of 2.0 – 5.0 mm, with allowed deviation:  $\frac{+0.13}{-0.10}$  mm.

Thickness of wear layer 0.2 – 0.55 mm, with allowed deviation:  $\frac{+0.13}{-0.10}$  %.

Total mass per unit area 3.853 – 10.03 kg/m<sup>2</sup>, with allowed deviation:  $\frac{+13}{-10}$  %.

Reference: see reports mentioned under paragraph 3.1.

The classification is valid for the following end use applications:

- As a floor covering
- On an end use substrates of classes A1 and A2-s1,d0 according to EN 13238:2010.
- By any methods and means of fixing.



## 5 Limitations

This classification document does not represent type approval or certification of the product.



Statement when the product is being CE marked under attestation of conformity system 3:

"The classification assigned to the product in this report is appropriate to a declaration of conformity by the manufacturer within the context of system 3 attestation of conformity and CE marking under the Construction Products Directive.

The manufacturer has made a declaration, which is held on file. This confirms that the products design requires no specific processes, procedures or stages (e.g. no addition of flame-retardants, limitation of organic content, or addition of fillers) that are aimed at enhancing the fire performance in order to obtain the classification achieved. As a consequence the manufacturer has concluded that system 3 attestation is appropriate.

The test laboratory has, therefore, played no part in sampling the product for the test, although it holds appropriate references, supplied by the manufacturer, to provide for traceability of the samples tested."

## 6 Approval of document
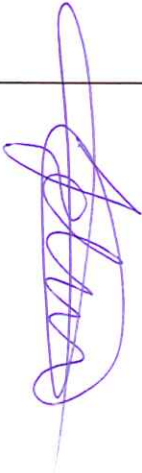
<b>Author</b>		<b>Signature of person undertaking classification</b>
J. de Wolff		
Expert and project leader Flooring		<b>Signature of person authorising this report</b>
<b>Approved</b>		
H. Smit		
Business field manager		

- This is the end of this report -

TÜV Rheinland Nederland B.V.  
The Netherlands

Postal address:  
P.O. Box 337  
7500 AH Enschede

Parking and delivery:  
Josink Esweg 10  
7545 PN Enschede

[www.tuv.com/nl](http://www.tuv.com/nl)

T +31 88 888 7888  
F +31 88 888 7859

Jaring.de.Wolff@nl.tuv.com

Date  
02-10-2014

Project number  
89206631

Report number  
89206331.01br

Article  
Luxury Vinyl Tile

Appendix  
I : Flooring Radiant Panel Single  
Specimen Report – 8 pages

Return address: P.O. box 337, 7500 AH Enschede, The Netherlands



### Report

Project number : 89206631  
Report number : 89206631.01br

### **Received:**

A sample of a 5 mm thick heterogeneous resilient floorcovering, marked as: “Luxury Vinyl Tile”; TÜV reference: MT14-154063673-40.01

The samples have been received on the 11<sup>th</sup> of September 2014. The samples are selected by the applicant. The test house has had no influence on the sampling procedure.

### **Identification parameters received from the manufacturer:**

Name : Luxury Vinyl Tile  
Pattern no. : JH-6017-3  
Batch no : JH20140808  
Dimensions : 304.8 mm x 609.6 mm x 5.0 mm  
Package : 1.858 m<sup>2</sup>  
Total thickness : 5.0 mm  
Total mass per unit area : 10.03 kg/m<sup>2</sup>  
Wear layer : 0.55 mm  
Composition / Material : PVC, CaCO<sub>3</sub>, DOTP  
Classification standard : ISO 10852  
Use of fire-retardant : No

### **Order:**

Classification of burring behaviour according to EN 13501-1:2007+ A1:2009.

### **Test method:**

Ignitability (direct impingement of flame) : EN ISO 11925-2:2010  
Reaction to fire (radiant panel) : EN ISO 9239-1:2010

### **Results:**

See page two and three.

### **Appendix:**

See page four up to and including eleven.

## TEST RESULTS

Ignitability EN-ISO 11925-2 :2010

Date of testing : 17-9-2014  
 Conditioning time, climate :  $\geq 3$  days,  $23 \pm 2$  °C and  $50 \pm 5$  %  
 Description of substrate : 6 mm. Fibre cement board, 1800 kg/m<sup>3</sup>.  
 Flame application : Surface.  
 Application time : 15 seconds.

Date  
02-10-2014

Project number  
89206631

Report number  
89206331.01br

Article  
Luxury Vinyl Tile

Page  
2/11

Direction:	In production			Across production		
	15	15	15	15	15	15
Total burning time <sup>1</sup> (15 s)	15	15	15	15	15	15
Flame tip reaches 150 mm (s)	no	no	no	no	no	No
Extent of damaged area, length (mm)	51	48	58	58	58	55
Extent of damaged area, width (mm)	17	12	12	12	12	12
Material melts (yes/no)	no	no	no	no	no	no
Shrinks away <sup>2</sup> (yes/no)	no	no	no	no	no	no
Glowing <sup>3</sup> (sec)	no	no	no	no	no	no
Flaming debris (yes/no)	no	no	no	no	no	no
Ignition of filter paper (yes/no)	no	no	no	no	no	no

1 Inclusive a flame application time of 15 or 30 seconds with surface or edge impingement

2 Shrinks away from flame without being ignited

3 The time at which it occurs and its duration

Radiant Panel test ISO 9239-1:2010

Date of testing : 17-9-2014

Conditioning time, climate :  $\geq 3$  days,  $23 \pm 2$  °C and  $50 \pm 5$  %

Description of substrate : Fibre cement board 6 mm,  $1800 \pm 200$  kg/m<sup>3</sup> conforming to EN 13238.

Sampling procedure : By contractor.

Description of cleaning used : None.

Fixing method : None, loose laid.

\* = manufacturer's declaration

Test specimen, orientation	Flame spread (cm)	CRF (kW/m <sup>2</sup> )	Peak light attenuation (%)	Smoke production (%.min)
1, $\perp$	6.0	$\geq 10.9$	17.6	44
2, $\uparrow$	5.0	$\geq 10.9$	24.2	62
3, $\uparrow$	7.0	$\geq 10.9$	22.6	67
4, $\uparrow$	7.0	$\geq 10.9$	25.1	58
<b>Mean<sub>2-4</sub></b>	<b>6.3</b>	<b><math>\geq 10.9</math></b>	<b>24.0</b>	<b>62</b>

Remarks: There is flashing & transitory observed, there is no sustained flaming observed.

All four tested specimen extinguished naturally before the end of the test duration

## CONCLUSION

Date  
02-10-2014  
Project number  
89206631

According to EN 13501-1:2007+ A1:2009 the tested sample of the aforementioned quality **Luxury Vinyl Tile**, in relation to its reaction to fire behaviour is classified: **B<sub>n</sub>**.  
The additional classification in relation to smoke production is: **s1**.

Report number  
89206331.01br  
Article  
Luxury Vinyl Tile

The aforementioned quality meets the requirement of reaction to fire classification:

**B<sub>n</sub> – s1**

Page  
3/11

The classification is valid for the following end use applications:

- End use substrates of classes A1 and A2-s1,d0 , for example fibre cement board.
- Any way of fixation.

### Statements:

The test results only relate to the behaviour of the test specimens of the examined product under the particular conditions of the test in laboratory conditions; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use. The method might not be suitable if the product is exposed to much larger flames or heat radiant sources.

The validity of this report will expire five years after its issue or directly after alterations or modifications of the examined product (combination(s) and/or the criteria. This report shall not be reproduced, except in full, without the written approval of the testing laboratory.

This document does not represent type approval or certification of the product.

Author:

Mr. J. de Wolff



Review:

Mr. R. Boerboom



*All rights reserved.*

*No part of this report may be reproduced, provided to and/or examined by third parties, and/or published by print, photoprint, microfilm, in electronic form or any other means without the explicit previous written consent of TÜV Rheinland Nederland B.V. The results are based upon the samples received and have not to be representative for the total production. TÜV Rheinland Nederland B.V. had no influence on the sampling.*

*In case this report was drafted within the context of an assignment to TÜV Rheinland Nederland B.V., the rights and obligations of contracting parties are subject to the General Terms & Conditions for Advisory, Research and Certification assignments to TÜV Rheinland Nederland B.V. and/or the relevant agreement concluded between the contracting parties.*

© 2010 TÜV Rheinland Nederland B.V.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Date  
02-10-2014  
Project number  
89206631

Report produced with the Fire Testing Technology FRPSoft software

page 1  
Report number  
89206331.01br

### Flooring Radiant Panel Single Specimen Report

Article  
Luxury Vinyl Tile

Standard : EN ISO 9239-1:2002  
Laboratory : TÜV Rheinland Nederland B.V.  
Sponsor : Tuv Shanghai 89206631  
Date of test : Sep. 17 2014

Page  
4/11

Specimen description : Grijs Laminat MT14-154063673-40.01

Test name : Prod #1

File name : D:\FRPH\ESI\4090021.CSV

Test number in series : 4

Flux calibration file name : C:\FRPSoft\CALIBR\EX14014.CSV

Thickness (mm) :

:

Density (kg/m<sup>3</sup>) :

:

Test duration : 12 minutes 06 seconds (726 s)

Substrate used? : Yes

Substrate : Calcium silicate

Fixing method : none

Conditioned? : Yes

Conditioning temp. (°C) : 23

Conditioning RH (%) : 50

#### Test Results

Time to ignition : 2 minutes 01 seconds (121 s)

Time to flameout : 12 minutes 03 seconds (723 s)

Extent of burning (mm) : 50

Critical flux at extinguishment (kW/m<sup>2</sup>) : >= 10.9

HF-10 (kW/m<sup>2</sup>) : >= 10.9

HF-20 (kW/m<sup>2</sup>) : >= 10.9

HF-30 (kW/m<sup>2</sup>) : >= 10.9

Flame spread at 10 minutes (mm) : 50

Flame spread at 20 minutes (mm) : -1

Flame spread at 30 minutes (mm) : -1

Peak light attenuation (%) : 24.18

Time to peak light attenuation : 3 minutes 53 seconds (233 s)

Total integrated smoke (%·min) : 61.74

Potential classification : A2(1)B(0)

Smoke production classification : s1

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test, they are not intended to be the sole criteria for assessing the potential fire hazard of the product in use.



## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRTSoft software

page 2


Date  
02-10-2014

Project number  
89206631

Report number  
89206331.01br

Article  
Luxury Vinyl Tile

Page  
5/11

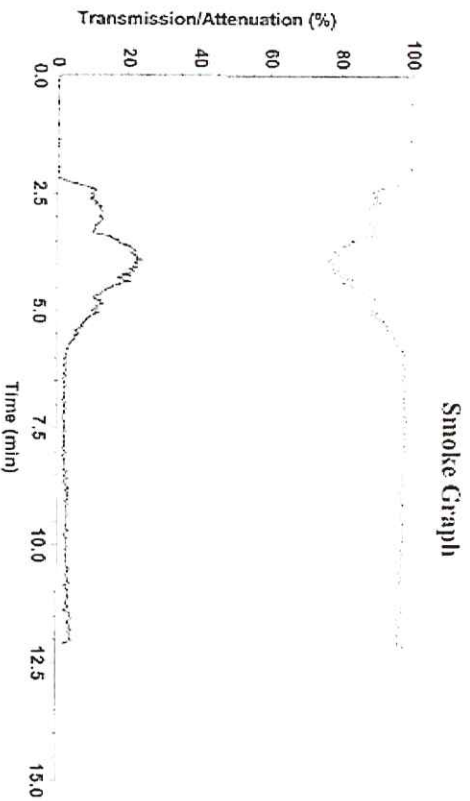

Test name : Prod #1  
File name : D:\FRP\FILES\14090021.CSV

### Rake Results

Position (mm)	Time (s)	Flux (kW/m <sup>2</sup> )	Qsh (MJ/m <sup>2</sup> )	Position (mm)	Time (s)	Flux (kW/m <sup>2</sup> )	Qsh (MJ/m <sup>2</sup> )
60	-	11.7	-	510	-	3.6	-
110	-	10.8	-	569	-	3.0	-
160	-	10.0	-	610	-	2.6	-
210	-	9.1	-	660	-	2.2	-
260	-	8.0	-	710	-	1.8	-
310	-	7.0	-	760	-	1.6	-
360	-	6.1	-	810	-	1.5	-
410	-	5.2	-	860	-	1.3	-
460	-	4.3	-	910	-	1.2	-

### Comments

Specimen extinguished naturally.

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Date  
02-10-2014  
Project number  
89206631

Report number  
89206331.01br

Report prepared with the Fire Testing Technology FTRSoft software

.log

Article  
Luxury Vinyl Tile

Page  
6/11

### Flooring Radiant Panel Single Specimen Report

Standard : EN ISO 9239-1-2002  
Laboratory : TÜV Rheinland Nederland n.v.  
Sponsor : Tuv Shanghai 89206631  
Date of test : Sep. 17 2014

Specimen description : Click PVC grys MT14-154063673-40.01  
Test name : Prod #2  
File name : D:\FRPFILE\M14090025.CSV  
Test number in series : 4

Flux calibration file name : CA\FRPSOFT\CALIBR\EX14014.CSV

Thickness (mm) :  
Density (kg/m<sup>3</sup>) :

Test duration : 12 minutes 03 seconds (723 s)  
Substrate used? : Yes  
Substrate : Calcium silicate  
Fixing method : none  
Conditioned? : Yes  
Conditioning temp. (°C) : 23  
Conditioning RH (%) : 50

#### Test Results

Time to ignition : 2 minutes 01 seconds (121 s)  
Time to flameout : 12 minutes 02 seconds (722 s)  
Extent of burning (mm) : 70  
Critical flux at extinguishment (kW/m<sup>2</sup>) : >= 10.9  
HF-10 (kW/m<sup>2</sup>) : >= 10.9  
HF-20 (kW/m<sup>2</sup>) : >= 10.9  
HF-30 (kW/m<sup>2</sup>) : >= 10.9  
Flame spread at 10 minutes (mm) : 70  
Flame spread at 20 minutes (mm) : -1  
Flame spread at 30 minutes (mm) : -1  
Peak light attenuation (%) : 17.62  
Time to peak light attenuation : 3 minutes 56 seconds (236 s)  
Total integrated smoke (%.min) : 43.88  
Potential classification : A2(F)/B(0)  
Smoke production classification : s1


These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRTSoft software

Page 2

### Smoke Graph

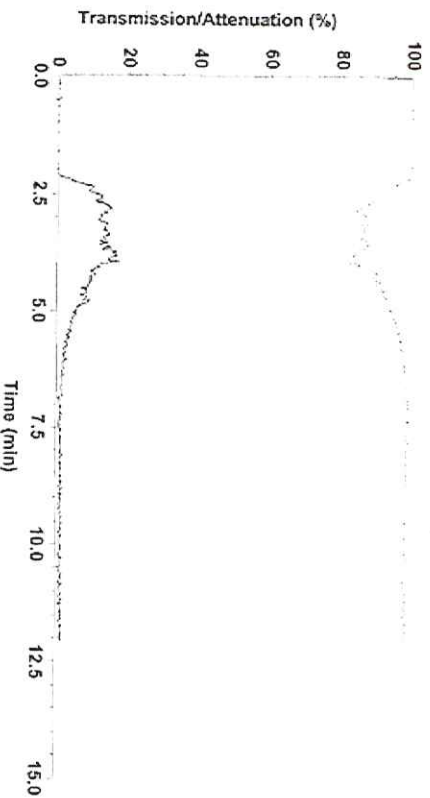

Test name : Prod #2  
File name : D:\FRPFILES\14090025.CSV

### Rake Results

Position (mm)	Time (s)	Flux (kW/m²)	Qsb (MJ/m²)	Position (mm)	Time (s)	Flux (kW/m²)	Qsb (MJ/m²)
60	191	11.7	2.058	510	-	3.6	-
110	-	10.8	-	560	-	3.0	-
160	-	10.0	-	610	-	2.6	-
210	-	9.1	-	660	-	2.2	-
260	-	8.0	-	710	-	1.8	-
310	-	7.0	-	760	-	1.6	-
360	-	6.1	-	810	-	1.5	-
410	-	5.2	-	860	-	1.3	-
460	-	4.3	-	910	-	1.2	-

### Comments

Specimen extinguished naturally.

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FFPSoft software

page 1

 Date  
 02-10-2014

 Project number  
 89206631

 Report number  
 89206331.01br

 Article  
 Luxury Vinyl Tile

 Page  
 8/11

### Flooring Radiant Panel Single Specimen Report

Standard : EN ISO 9239-1:2002  
 Laboratory : TÜV Rheinland Nederland B.V.  
 Sponsor : Tuv Shanghai 89206631  
 Date of test : Sep. 17 2014

Specimen description : Click PVC grös MTL14-154063673-40.01  
 Test name : Prod #3  
 File name : D:\FRPFILES\14090026.CSV  
 Test number in series : 4

Flux calibration file name : GMFRPSOFT\CALIBR\FLX14014.CSV

Thickness (mm) :  
 Density (kg/m³) :

: 12 minutes 39 seconds (759 s)

Substrate used? : Yes  
 Substrate : Calcium silicate  
 Fixing method : none  
 Conditioned? : Yes  
 Conditioning temp. (°C) : 23  
 Conditioning RH (%) : 50

#### Test Results

Time to ignition : 2 minutes 04 seconds (124 s)  
 Time to flameout : 12 minutes 07 seconds (727 s)  
 Extent of burning (mm) : 70  
 Critical flux at extinguishment (kW/m²) :  $\geq 10.9$   
 HF-10 (kW/m²) :  $\geq 10.9$   
 HF-20 (kW/m²) :  $\geq 10.9$   
 HF-30 (kW/m²) :  $\geq 10.9$   
 Flame spread at 10 minutes (mm) : 70  
 Flame spread at 20 minutes (mm) : -1  
 Flame spread at 30 minutes (mm) : -1  
 Peak light attenuation (%) : 22.56  
 Time to peak light attenuation : 4 minutes 16 seconds (256 s)  
 Total integrated smoke (%.min) : 66.92

Potential classification : A2(0)/B(0)  
 Smoke production classification : s1

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FITPASS software

Page 7


Date  
02-10-2014

Project number  
89206631

Report number  
89206331.01br

Article  
Luxury Vinyl Tile

Page  
9/11

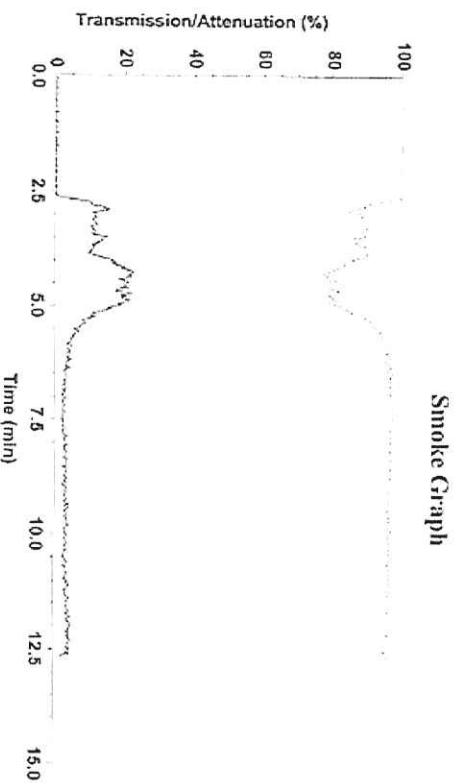

Test name : Prod #3

File name : D:\FRFILES\14090026.CSV

### Rake Results

Position (mm)	Time (s)	Flux (kW/m²)	Qsh (MJ/m²)	Position (mm)	Time (s)	Flux (kW/m²)	Qsh (MJ/m²)
60	282	11.7	3.038	510	-	3.6	-
110	-	10.8	-	560	-	3.0	-
160	-	10.0	-	610	-	2.6	-
210	-	9.1	-	660	-	2.2	-
260	-	8.0	-	710	-	1.8	-
310	-	7.0	-	760	-	1.6	-
360	-	6.1	-	810	-	1.5	-
410	-	5.2	-	860	-	1.3	-
460	-	4.3	-	910	-	1.2	-

### Comments

Specimen extinguished naturally.

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRFSsoft software

page 1

**Date**  
 02-10-2014  
**Project number**  
 89206631

**Report number**  
 89206331.01br

### Flooring Radiant Panel Single Specimen Report

**Article**  
 Luxury Vinyl Tile

**Standard** : EN ISO 9239-1:2002  
**Laboratory** : TÜV Rheinland Nederland B.V.  
**Sponsor** : Tuv Shanghai 89206631  
**Date of test** : Sep. 17 2014

**Page**  
 10/11

**Specimen description** : Grijs Laminaat MTT4-154063673-40.01  
**Test name** : Cross #1  
**File name** : D:\FR\FEIL\FS\14090022.CSV  
**Test number in series** : 4

**Flux calibration file name** : C:\FR\SOFT\CALIB\FLEX14014.CSV

**Thickness (mm)** :  
**Density (kg/m<sup>3</sup>)** :  
**Test duration** : 12 minutes 13 seconds (733 s)  
**Substrate used?** : Yes  
**Substrate** : Calcium silicate  
**Fixing method** : none  
**Conditioned?** : Yes  
**Conditioning temp. (°C)** : 23  
**Conditioning RH (%)** : 50

#### Test Results

**Time to ignition** : 2 minutes 01 seconds (121 s)  
**Time to flameout** : 12 minutes 11 seconds (731 s)  
**Extent of burning (mm)** : 60  
**Critical flux at extinguishment (kW/m<sup>2</sup>)** : >= 10.9  
**HF-10 (kW/m<sup>2</sup>)** : >= 10.9  
**HF-20 (kW/m<sup>2</sup>)** : >= 10.9  
**HF-30 (kW/m<sup>2</sup>)** : >= 10.9  
**Flame spread at 10 minutes (mm)** : 60  
**Flame spread at 20 minutes (mm)** : -1  
**Flame spread at 30 minutes (mm)** : -1  
**Peak light attenuation (%)** : 25.08  
**Time to peak light attenuation** : 3 minutes 56 seconds (236 s)  
**Total integrated smoke (%.min)** : 57.57

**Potential classification** : A2(0)/B(0)  
**Smoke production classification** : s1

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Test mg Tech analyzer FRPSoft software

page 7


Date  
02-10-2014

Project number  
89206631

Report number  
89206331\_01br

Article  
Luxury Vinyl Tile

Page  
11/11

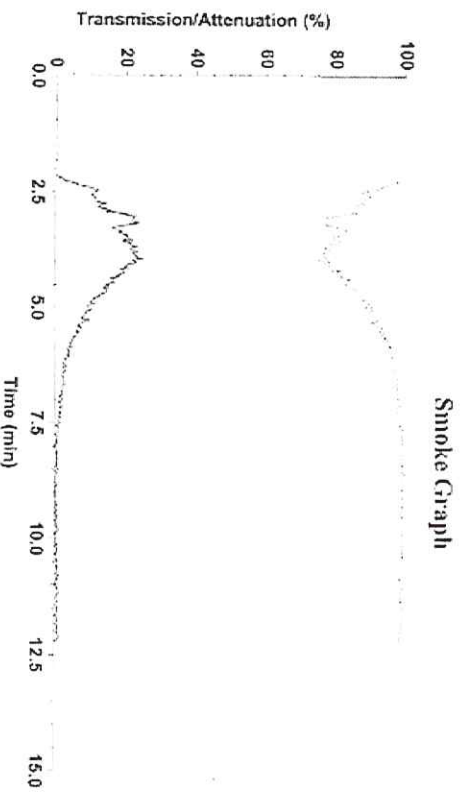

Test name : Cross #1  
 File name : D:\FRPFILES\14091022.CSV

### Rake Results

Position (mm)	Time (s)	Flux (kW/m²)	Qsh (MJ/m²)	Position (mm)	Time (s)	Flux (kW/m²)	Qsh (MJ/m²)
60	195	11.7	2.101	510	-	3.6	-
110	-	10.8	-	560	-	3.0	-
160	-	10.0	-	610	-	2.6	-
210	-	9.1	-	660	-	2.2	-
260	-	8.0	-	710	-	1.8	-
310	-	7.0	-	760	-	1.6	-
360	-	6.1	-	810	-	1.5	-
410	-	5.2	-	860	-	1.3	-
460	-	4.3	-	910	-	1.2	-

### Comments

Specimen extinguished naturally.

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

TÜV Rheinland Nederland B.V.  
The Netherlands

Postal address:  
P.O. Box 337  
7500 AH Enschede

Parking and delivery:  
Josink Esweg 10  
7545 PN Enschede

[www.tuv.com/nl](http://www.tuv.com/nl)

T +31 88 888 7888  
F +31 88 888 7859

Jaring.de.Wolff@nl.tuv.com

Date  
02-10-2014

Project number  
89206631

Report number  
89206331.02br

Article  
Luxury Vinyl Tile

Appendix  
I : Flooring Radiant Panel Single  
Specimen Report – 8 pages

Return address: P.O. box 337, 7500 AH Enschede, The Netherlands



### Report

Project number : 89206631  
Report number : 89206631.02br

### **Received:**

A sample of a 2 mm thick heterogeneous Resilient floorcovering, marked as: “**Luxury Vinyl Tile**”; TÜV reference: MT14-154063673-40.02

The samples have been received on the 11<sup>th</sup> of September 2014. The samples are selected by the applicant. The test house has had no influence on the sampling procedure.

### **Identification parameters received from the manufacturer:**

Name : Luxury Vinyl Tile  
Pattern no. : JH-0211  
Batch no : JH20140816  
Dimensions : 457.2 mm x 457.2 mm x 2.0 mm  
Package : 2.71 m<sup>2</sup>  
Total thickness : 2.0 mm  
Total mass per unit area : 3.853 kg/m<sup>2</sup>  
Wear layer : 0.2 mm  
Composition / Material : PVC, CaC03, DOTP  
Classification standard : ISO 10852  
Use of fire-retardant : No

### **Order:**

Classification of burning behaviour according to EN 13501-1:2007+ A1:2009.

### **Test method:**

Ignitability (direct impingement of flame) : EN ISO 11925-2:2010  
Reaction to fire (radiant panel) : EN ISO 9239-1:2010

### **Results:**

See page two and three.

### **Appendix:**

See page four up to and including eleven.



## TEST RESULTS

Ignitability EN-ISO 11925-2 :2010

Date of testing : 17-9-2014  
 Conditioning time, climate :  $\geq 3$  days,  $23 \pm 2$  °C and  $50 \pm 5$  %  
 Description of substrate : 6 mm, Fibre cement board, 1800 kg/m<sup>3</sup>.  
 Flame application : Surface.  
 Application time : 15 seconds.

Date  
02-10-2014  
 Project number  
89206631  
 Report number  
89206331.02br

Article  
Luxury Vinyl Tile

Page  
2/11

Direction:	In production			Across production		
	15	15	15	15	15	15
Total burning time <sup>1</sup> (15 s)	15	15	15	15	15	15
Flame tip reaches 150 mm (s)	no	no	no	no	no	No
Extent of damaged area, length (mm)	52	60	62	56	60	51
Extent of damaged area, width (mm)	11	12	12	12	12	11
Material melts (yes/no)	no	no	no	no	no	no
Shrinks away <sup>2</sup> (yes/no)	no	no	no	no	no	no
Glowing <sup>3</sup> (sec)	no	no	no	no	no	no
Flaming debris (yes/no)	no	no	no	no	no	no
Ignition of filter paper (yes/no)	no	no	no	no	no	no

- 1 Inclusive a flame application time of 15 or 30 seconds with surface or edge impingement
- 2 Shrinks away from flame without being ignited
- 3 The time at which it occurs and its duration

Radiant Panel test ISO 9239-1:2010

Date of testing : 17-9-2014  
 Conditioning time, climate :  $\geq 3$  days,  $23 \pm 2$  °C and  $50 \pm 5$  %  
 Description of substrate : Fibre cement board 6 mm, 1800±200 kg/m<sup>3</sup> conforming to EN 13238.

Sampling procedure : By contractor.  
 Description of cleaning used : None.  
 Fixing method : None, loose laid.  
 \* = manufacturer's declaration

Test specimen, orientation	Flame spread (cm)	CRF (kW/m <sup>2</sup> )	Peak light attenuation (%)	Smoke production (%.min)
1, ↑	11.0	10.8	20.2	77
2, ⊥	13.0	10.5	27.2	124
3, ⊥	18.0	9.6	30.0	130
4, ⊥	15.0	10.2	27.1	125
<b>Mean<sub>2,4</sub></b>	<b>15.3</b>	<b>10.1</b>	<b>28.1</b>	<b>126</b>

Remarks: There is flashing & transitory observed, there is no sustained flaming observed.  
 All four tested specimen extinguished naturally before the end of the test duration

## CONCLUSION

Date  
02-10-2014

Project number  
89206631

Report number  
89206331.02br

Article  
Luxury Vinyl Tile

According to EN 13501-1:2007+ A1:2009 the tested sample of the aforementioned quality **Luxury Vinyl Tile**, in relation to its reaction to fire behaviour is classified: **B<sub>fl</sub>**.  
The additional classification in relation to smoke production is: **s1**.

The aforementioned quality meets the requirement of reaction to fire classification:

**B<sub>fl</sub> – s1**

Page  
3/11

The classification is valid for the following end use applications:

- End use substrates of classes A1 and A2-s1,d0 , for example fibre cement board.
- Any way of fixation.

### Statements:

The test results only relate to the behaviour of the test specimens of the examined product under the particular conditions of the test in laboratory conditions; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use. The method might not be suitable if the product is exposed to much larger flames or heat radiant sources.

The validity of this report will expire five years after its issue or directly after alterations or modifications of the examined product (combination(s) and/or the criteria. This report shall not be reproduced, except in full, without the written approval of the testing laboratory.

This document does not represent type approval or certification of the product.

Author:

Mr. J. de Wolff



Review:

Mr. R. Boerboom



All rights reserved.

*No part of this report may be reproduced, provided to and/or examined by third parties, and/or published by print, photoprint, microfilm, in electronic form or any other means without the explicit previous written consent of TÜV Rheinland Nederland B.V. The results are based upon the samples received and have not to be representative for the total production. TÜV Rheinland Nederland B.V. had no influence on the sampling.*

*In case this report was drafted within the context of an assignment to TÜV Rheinland Nederland B.V., the rights and obligations of contracting parties are subject to the General Terms & Conditions for Advisory, Research and Certification assignments to TÜV Rheinland Nederland B.V. and/or the relevant agreement concluded between the contracting parties.*

© 2010 TÜV Rheinland Nederland B.V.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Date  
02-10-2014

Project number  
89206631

Report number  
89206331\_02br

Report produced with the Fire Testing Technology FTRSoft software

Page 1

### Flooring Radiant Panel Single Specimen Report

Article  
Luxury Vinyl Tile

Page  
4/11

Standard : EN ISO 9239-1:2002  
 Laboratory : TÜV Rheinland Nederland B.V.  
 Sponsor : Tuv Shanghai 89206631  
 Date of test : Sep. 17 2014

Specimen description

<sup>Very</sup> : Grifs laminaat MT14-154063673-40.02  
 : Prod #1

File name : D:\FRPFILES\14090019.CSV

Test number in series : 4

Flux calibration file name : CA\FRPSOFT\CALIBR\EX14014.CSV

Thickness (mm) :  
 Density (kg/m<sup>3</sup>) :

Test duration : 12 minutes 06 seconds (726 s)

Substrate used? : Yes

Substrate : Calcium silicate

Fixing method : none

Conditioned? : Yes

Conditioning temp. (°C) : 23

Conditioning RH (%) : 50

#### Test Results

Time to ignition : 2 minutes 01 seconds (121 s)

Time to flameout : 12 minutes 02 seconds (722 s)

Extent of burning (mm) : 110

Critical flux at extinguishment (kW/m<sup>2</sup>) : 10.77

HF-10 (kW/m<sup>2</sup>) : 10.77

HF-20 (kW/m<sup>2</sup>) : >= 10.9

HF-30 (kW/m<sup>2</sup>) : >= 10.9

Flame spread at 10 minutes (mm) : 110

Flame spread at 20 minutes (mm) : -1

Flame spread at 30 minutes (mm) : -1

Peak light attenuation (%) : 20.24

Time to peak light attenuation : 8 minutes 48 seconds (528 s)

Total integrated smoke (%.min) : 76.95

Potential classification : A2(M)/B(M)

Smoke production classification : s1

These results relate only to the behaviour of the specimen of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology' ERPSsd software

Page 2


Date  
02-10-2014

Project number  
89206631

Report number  
89206331.02br

Article  
Luxury Vinyl Tile

Page  
5/11

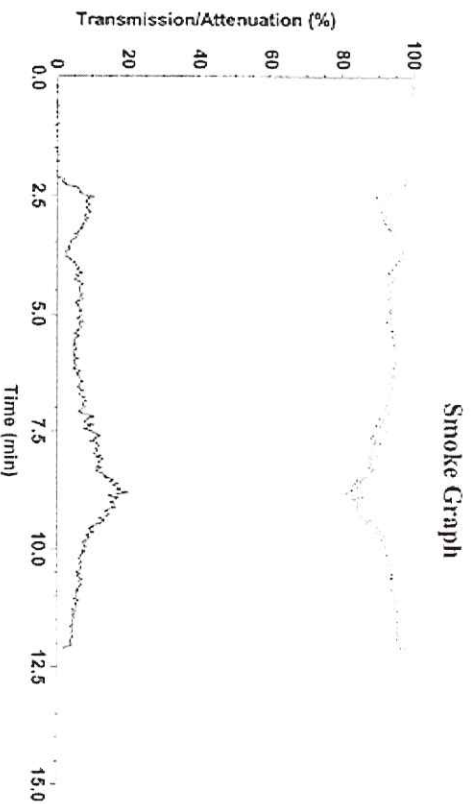

Test name : Prod #1  
File name : D:\FRFILES\H4090019.CSV

### Rake Results

Position (mm)	Time (s)	Flux (kW/m²)	Qsb (MJ/m²)	Position (mm)	Time (s)	Flux (kW/m²)	Qsb (MJ/m²)
60	301	11.7	3.243	510	-	3.6	-
110	612	10.8	6.116	560	-	3.0	-
160	-	10.0	-	610	-	2.6	-
210	-	9.1	-	660	-	2.2	-
260	-	8.0	-	710	-	1.8	-
310	-	7.0	-	760	-	1.6	-
360	-	6.1	-	810	-	1.5	-
410	-	5.2	-	860	-	1.3	-
460	-	4.3	-	910	-	1.2	-

### Comments

Specimen extinguished naturally.

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Date  
02-10-2014  
Project number  
89206631

Report produced with the Fire Testing Technology FTRFSch software

Page 1

Report number  
89206331.02br

### Flooring Radiant Panel Single Specimen Report

Article  
Luxury Vinyl Tile

Page  
6/11

Standard : EI 2002  
Laboratory : TÜV Rheinland Nederland  
Sponsor : Tiv Shanghai 89206631  
Date of test : Sep. 17 2014

Specimen description : Beige Laminaat MT14-15406367-40.02  
Test name : Cross #1  
File name : D:\FRPFILE\SN14090020.CSV  
Test number in series : 4

Flux calibration file name : C:\FRP\SOFT\CALIB\FLX14014.CSV

Thickness (mm) :  
Density (kg/m<sup>3</sup>) :  
Test duration : 12 minutes 08 seconds (728 s)  
Substrate used? : Yes  
Substrate : Calcium silicate  
Fixing method : none  
Conditioned? : Yes  
Conditioning temp. (°C) : 23  
Conditioning RH (%) : 50

#### Test Results

Time to ignition : 2 minutes 03 seconds (123 s)  
Time to flameout : 12 minutes 06 seconds (726 s)  
Extent of burning (mm) : 130  
Critical flux at extinguishment (kW/m<sup>2</sup>) : 10.46  
HF-10 (kW/m<sup>2</sup>) : 10.46  
HF-20 (kW/m<sup>2</sup>) : >= 10.9  
HF-30 (kW/m<sup>2</sup>) : >= 10.9  
Flame spread at 10 minutes (mm) : 130  
Flame spread at 20 minutes (mm) : 1  
Flame spread at 30 minutes (mm) : -1  
Peak light attenuation (%) : 27.24  
Time to peak light attenuation : 8 minutes 08 seconds (488 s)  
Total integrated smoke (%.min) : 124.27

Potential classification : A2(0)/B(0)  
Smoke production classification : s1


These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRTSoft software

page 2

### Smoke Graph

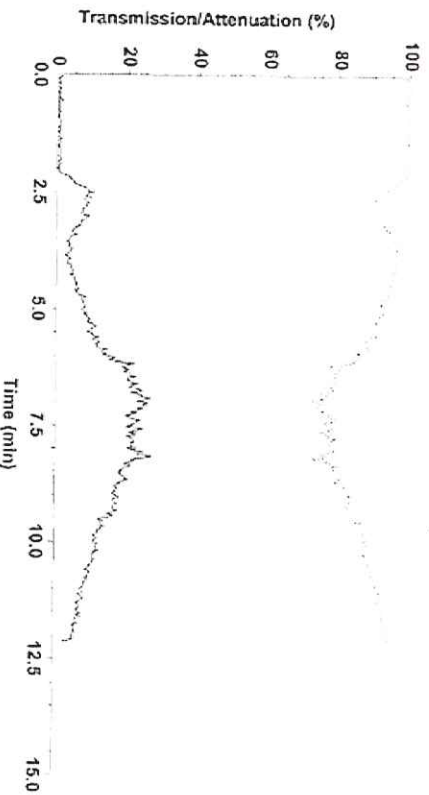

Test name : Cross #1  
 File name : D:\FRPFILES\14090020.CSV

### Rake Results

Position (mm)	Time (s)	Flux (kW/m²)	Qsb (MJ/m²)	Position (mm)	Time (s)	Flux (kW/m²)	Qsb (MJ/m²)
60	365	11.7	3.933	510	-	3.6	-
110	509	10.8	5.087	560	-	3.0	-
160	-	10.0	-	610	-	2.6	-
210	-	9.1	-	660	-	2.2	-
260	-	8.0	-	710	-	1.8	-
310	-	7.0	-	760	-	1.6	-
360	-	6.1	-	810	-	1.5	-
410	-	5.2	-	860	-	1.3	-
460	-	4.3	-	910	-	1.2	-

### Comments

Specimen extinguished naturally.

*These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.*

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FTRPSoft software

Page 1

### Flooring Radiant Panel Single Specimen Report

Standard : EN ISO 9239-1:2002  
 Laboratory : TÜV Rheinland Nederland B.V.  
 Sponsor : Tivv ShangHai 89206631  
 Date of test : Sep. 17 2014

Date : 02-10-2014  
 Project number : 89206631  
 Report number : 89206331.02br  
 Article : Luxury Vinyl Tile  
 Page : 8/11

Specimen description : Beige Click PVC MT14-15406367-40.02  
 Test name : Cross #2  
 File name : D:\FRP\FILE\SM14090023.CSV  
 Test number in series : 4

Flux calibration file name : C:\FRP\SOFTWARE\CALIBR\FLX14014.CSV

Thickness (mm) :  
 Density (kg/m<sup>3</sup>) :

Test duration : 12 minutes 03 seconds (723 s)

Substrate used?

: Yes

Substrate

: Calcium silicate

Fixing method

: none

Conditioned?

: Yes

Conditioning temp. (°C)

: 23

Conditioning RH (%)

: 50

#### Test Results

Time to ignition : 2 minutes 01 seconds (121 s)

Time to flameout : 12 minutes 02 seconds (722 s)

Extent of burning (mm)

: 180

Critical flux at extinguishment (kW/m<sup>2</sup>)

: 9.63

HF-10 (kW/m<sup>2</sup>)

: >= 10.9

HF-20 (kW/m<sup>2</sup>)

: >= 10.9

HF-30 (kW/m<sup>2</sup>)

: >= 10.9

Flame spread at 10 minutes (mm)

: 180

Flame spread at 20 minutes (mm)

: -1

Flame spread at 30 minutes (mm)

: -1

Peak light attenuation (%)

: 30.04

Time to peak light attenuation

: 7 minutes 29 seconds (449 s)

Total integrated smoke (%.min)

: 129.52

Potential classification

: A2(D)/B(0)

Smoke production classification

: s1

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRTSoft software

page 2


Date  
02-10-2014

Project number  
89206631

Report number  
89206331.02br

Article  
Luxury Vinyl Tile

Page  
9/11

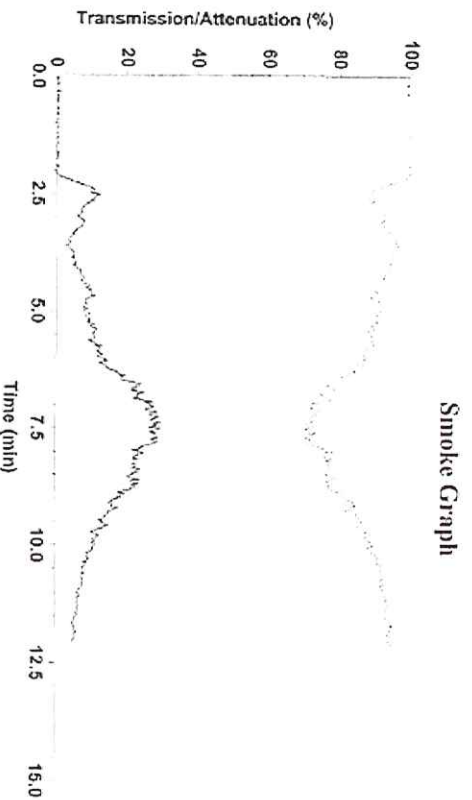

Test name : Cross #2  
File name : D:\FRPFILES\14090023.CSV

### Rake Results

Position (mm)	Time (s)	Flux (kW/m²)	Qst (MJ/m²)	Position (mm)	Time (s)	Flux (kW/m²)	Qst (MJ/m²)
60	376	11.7	4.051	510	-	3.6	-
110	508	10.8	5.077	560	-	3.0	-
160	578	10.0	5.256	610	-	2.6	-
210	-	9.1	-	660	-	2.2	-
260	-	8.0	-	710	-	1.8	-
310	-	7.0	-	760	-	1.6	-
360	-	6.1	-	810	-	1.5	-
410	-	5.2	-	860	-	1.3	-
460	-	4.3	-	910	-	1.2	-

### Comments

Specimen extinguished naturally.

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.



## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRTSoft software

Page 1

### Flooring Radiant Panel Single Specimen Report

Standard : EN ISO 9239-1:2002  
 Laboratory : TÜV Rheinland Nederland B.V.  
 Sponsor : Tuv Shanghai 89206631  
 Date of test : Sep. 17 2014

Date : 02-10-2014  
 Project number : 89206631  
 Report number : 89206331.02br  
 Article :  
 Luxury Vinyl Tile  
 Page : 10/11

Specimen description : Beige Click PVC MTT4-15406367-40.02  
 Test name : Cross #3  
 File name : D:\FR\FILBS\140900024.CSV  
 Test number in series : 4

Flux calibration file name : C:\FR\SOFT\CALIBR\PLX14014.CSV

Thickness (mm) :  
 Density (kg/m<sup>3</sup>) :  
 Test duration : 12 minutes 04 seconds (724 s)  
 Substrate used? : Yes  
 Substrate : Calcium silicate  
 Fixing method : none  
 Conditioned? : Yes  
 Conditioning temp. (°C) : 23  
 Conditioning RH (%) : 50

#### Test Results

Time to ignition : 2 minutes 01 seconds (121 s)  
 Time to flameout : 12 minutes 03 seconds (723 s)  
 Extent of burning (mm) : 150  
 Critical flux at extinguishment (kW/m<sup>2</sup>) : 10.15  
 HF-10 (kW/m<sup>2</sup>) : 10.31  
 HF-20 (kW/m<sup>2</sup>) : >= 10.9  
 HF-30 (kW/m<sup>2</sup>) : >= 10.9  
 Flame spread at 10 minutes (mm) : 140  
 Flame spread at 20 minutes (mm) : -1  
 Flame spread at 30 minutes (mm) : -1  
 Peak light attenuation (%) : 27.11  
 Time to peak light attenuation : 8 minutes 01 seconds (481 s)  
 Total integrated smoke (%.min) : 125.16  
 Potential classification : A2(M)/B(M)  
 Smoke production classification : s1

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

## APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRPSOFT software

Page 2


Date  
02-10-2014

Project number  
89206631

Report number  
89206331.02br

Article  
Luxury Vinyl Tile

Page  
11/11

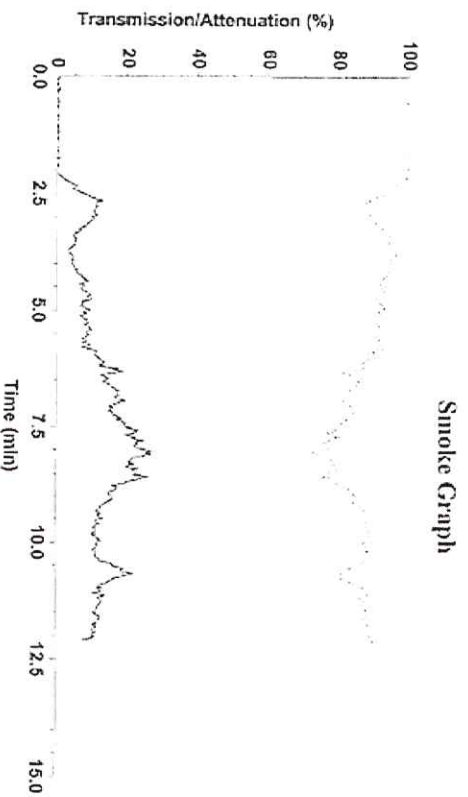

Test name : Cross #3  
File name : D:\FRP\FILES\14090024.CSV

### Rake Results

Position (mm)	Time (s)	Flux (kW/m²)	Qsh (MJ/m²)	Position (mm)	Time (s)	Flux (kW/m²)	Qsh (MJ/m²)
60	386	11.7	4.159	510	-	3.6	-
110	509	10.8	5.087	560	-	3.0	-
160	-	10.0	-	610	-	2.6	-
210	-	9.1	-	660	-	2.2	-
260	-	8.0	-	710	-	1.8	-
310	-	7.0	-	760	-	1.6	-
360	-	6.1	-	810	-	1.5	-
410	-	5.2	-	860	-	1.3	-
460	-	4.3	-	910	-	1.2	-

### Comments

Specimen extinguished naturally.

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

*SCS Global Services does hereby certify that an independent assessment has been conducted on behalf of:*



For the following product(s):

**Vinyl Tile:**

JH-LVT

This product meets all of the necessary qualifications to be certified for the following claim:

**FloorScore®**

Indoor Air Quality Certified to SCS-EC10.3-2014

Conforms to the CDPH/EHLB Standard Method v1.1-2010 (effective January 1, 2012) for the school classroom and private office parameters when modeled as Flooring.

Measured Concentration of Total Volatile Organic Compounds (TVOC): Less than/equal to 0.5 mg/m<sup>3</sup> (in compliance with CDPH/EHLB Standard Method v1.1-2010)

Registration # SCS-FS-03809

Valid from: December 21, 2015 to December 31, 2016

SCS Global Services is currently the only certification body approved by the Resilient Floor Covering Institute (RFCI) to provide FloorScore® product certification; certified products are only listed on the SCS Green Products Guide, <http://www.scsglobalservices.com/certified-green-products-guide>.



ANSI ACCREDITED PROGRAM  
PRODUCT CERTIFICATION  
#0821

A handwritten signature in black ink that reads "Robert J. Hrubes".

Robert J. Hrubes, Ph.D., Executive Vice President  
SCS Global Services  
2000 Powell Street, Ste. 600, Emeryville, CA 94608 USA



**Test Report**

No.: SHHG1512050955SD

Date: JAN. 07, 2016

Page: 1 of 3



The following sample(s) was/were submitted and identified by the client as:

Sample Description : JH-LVT, LUXURY VINYL TILE, FLOORING USED  
INDOOR

Style/ Item No. : JH-6005-1

Manufacturer 

Country of Destination : NETHERLANDS

Sample Receiving Date : DEC. 21, 2015

Testing Period : DEC. 21, 2015 TO JAN. 07, 2016

Test Performed : SELECTED TEST(S) AS REQUESTED BY APPLICANT

Test Requested : DETERMINATION OF DIMENSIONAL STABILITY AND  
CURING AFTER EXPOSURE TO HEAT (EN ISO  
23999:2012)

Test Result(s) : FOR FURTHER DETAILS, PLEASE REFER TO THE  
FOLLOWING PAGE(S)

Conclusion : THE TEST DATA WERE PROVIDED TO CLIENT FOR  
THEIR OWN ANALYSIS.

\*\*\*\*\*

Signed for and on behalf of  
SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.



Yomoro Gu  
Supervisor



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.  
Testing Center Hangzhou

3<sup>rd</sup> Building, No.889, Yishan Road, Xuhui District Shanghai, China 200233  
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

t (86-21) 61402666\*2013

f (86-21) 54500353

www.sgs.com.cn

t (86-21) 61402666\*2013

f (86-21) 54500353

e [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

# Test Report

No.: SHHG1512050955SD

Date: JAN. 07, 2016

Page: 2 of 3

## Test Conducted:

### Determination of dimensional stability and curing after exposure to heat (EN ISO 23999:2012)

Test Property	Test procedures/requirements	Rating/ Result
Determination of dimensional stability and curing after exposure to heat	<ol style="list-style-type: none"> <li>1. Measure the curling and dimension of the sample.</li> <li>2. Store the test pieces for 360+15 min in the oven, which had previously been stabilized at (80±2) °C.</li> <li>3. Remove the metal plates bearing the test pieces from the oven. Allow these to cool and recondition at a temperature of (23±2) °C and relative humidity (50±5) % for a further 24 h, unless otherwise specified for the product.</li> <li>4. After reconditioning, measure the dimensional changes to the test specimen.</li> <li>5. Measure the vertical distance between the support plate and the wear surface of the test specimen in four places around the edge (usually the corners), where the distance is greatest. Carryout the measurements with the micrometer.</li> </ol> $\frac{(L_0 - L_1)}{L_0} \times 100$ <p>L<sub>0</sub> is the initial length L<sub>1</sub> is the length after test</p>	<p>Curling: 0mm</p> <p>Dimensional change: Length direction: 0.10% Width direction: 0.05%</p>



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSI Standards Technical Services (Shanghai) Co., Ltd.  
Testing Center Hangzhou

3<sup>rd</sup> Building, No.889, Yishan Road, Xuhui District Shanghai, China 200233 t (86-21) 61402666\*2013 f (86-21) 54500353 www.sgs.com.cn  
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233 t (86-21) 61402666\*2013 f (86-21) 54500353 e [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

**Test Report**


No.: SHHG1512050955SD

Date: JAN. 07, 2016


Page: 3 of 3

**Sample Photo:**

Test sample (front view)

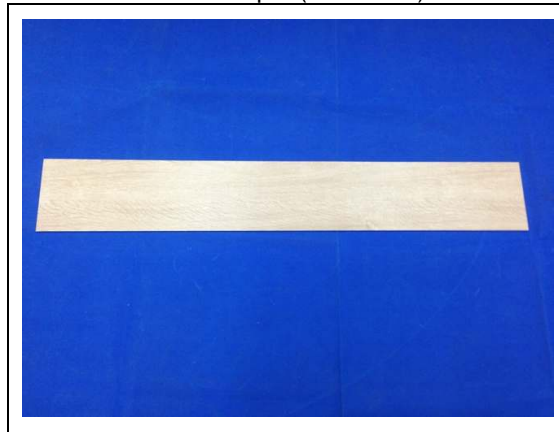

Test sample (back view)

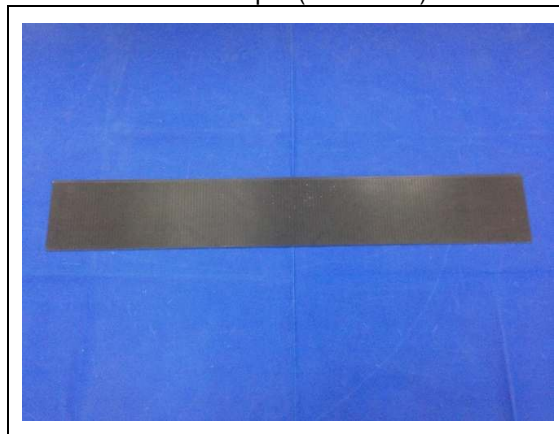

SGS authenticate the photo on original report only

\*\*\*End of Report\*\*\*







This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSI Standards Technical Services (Shanghai) Co., Ltd.  
Testing Center Hangzhou (311101)

3<sup>rd</sup> Building, No.889, Yishan Road, Xuhui District Shanghai, China 200233 t (86-21) 61402666\*2013 f (86-21) 54500353 www.sgs.com.cn  
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233 t (86-21) 61402666\*2013 f (86-21) 54500353 e sgs.china@sgs.com
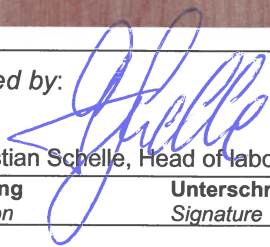
<b>Prüfbericht-Nr.:</b> <i>Test Report No.:</i>	21233119 002	<b>Auftrags-Nr.:</b> <i>Order No.:</i>	3146078	Seite 1 von 10 <i>Page 1 of 10</i>	
<b>Kunden-Referenz-Nr.:</b> <i>Client Reference No.:</i>	N/A	<b>Auftragsdatum:</b> <i>Order date:</i>	22.04.2014 2014-04-22		
<b>Auftraggeber:</b> <i>Client:</i>					
<b>Prüfgegenstand:</b> <i>Test item:</i>	PVC-Bodenbelag PVC Floor Covering				
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type No.:</i>	Luxury vinyl tile, N/A				
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	Prüfung auf die Emission flüchtiger organischer Substanzen (VOC) Examination regarding the emissions of volatile organic compounds (VOC)				
<b>Prüfgrundlage:</b> <i>Test specification:</i>	DEVL1101903D Décret n° 2011-321 du 23 mars 2011 relatif à l'étiquetage des produits de construction ou de revêtement de mur ou de sol et des peintures et vernis sur leurs émissions de polluants volatils				
<b>Wareneingangsdatum:</b> <i>Date of receipt:</i>	10.04.2015 2015-04-10				
<b>Prüfmuster-Nr.:</b> <i>Test sample No.:</i>	A000094327-001				
<b>Prüfzeitraum:</b> <i>Testing period:</i>	14.04.2015 – 11.05.2015 2015-04-14 – 2015-05-11				
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	Emissionsprüfung Nürnberg Emission Testing Nuremberg				
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland LGA Products GmbH				
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass				
<b>geprüft von / tested by:</b>		<b>kontrolliert von / reviewed by:</b>			
					
11.05.2015	i.A. Dr. Bernd Maciej, Expert	11.05.2015	i.V. Dr. Christian Schelle, Head of laboratory		
<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>	<b>Unterschrift</b> <i>Signature</i>	<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>	<b>Unterschrift</b> <i>Signature</i>
<b>Sonstiges / Other:</b>					
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>		<b>Prüfmuster vollständig und unbeschädigt</b> <i>Test item complete and undamaged</i>			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet	5 = mangelhaft N/T = nicht getestet
Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested	5 = poor N/T = not tested
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

Prüfbericht-Nr.: 21233119 002  
Test Report No.:

Seite 2 von 10  
Page 2 of 10

**Liste der verwendeten Prüfmittel**  
**List of used test equipment**



Prüfmittel Test equipment	Prüfmittel-Nr. / ID-Nr. Equipment No. / ID-No.	Nächste Kalibrierung Next calibration
Die Messunsicherheit wird auf Anfrage mitgeteilt / Information on standard uncertainty on client's request.		
Prüfkammer Nr. 69 / Test chamber Nr. 69	06829	12/2015
Probenahmepumpe Desaga 6 / Sampling pump Desaga 6	06958	03/2016
Probenahmepumpe Desaga 12 / Sampling pump Desaga 12	06878	03/2017
Probenahmepumpe GSA 3 / Sampling pump GSA 3	06824	12/2015
Probenahmepumpe GSA 4 / Sampling pump GSA 4	06820	12/2015
Seifenblasen-Durchflussmesser Gilian Nr. 6 / Air Flow Calibration System Gilian No. 6	06713	09/2016
Thermo-Hygrometer Lufft 1 / Thermo hygrometer Lufft 1	07887	08/2015
Spektral-Photometer (UV-VIS) Perkin-Elmer, Lambda 2 / Spectral-Photometer (UV-VIS) Perkin-Elmer, Lambda 2	06911	02/2016
GC - Agilent 7980A MS - Agilent 5975C, Thermodesorber – Turbo Matrix 650	06666 / 06667	12/2015



Prüfbericht-Nr.: 21233119 002  
Test Report No.:

Seite 3 von 10  
Page 3 of 10

**Produktbeschreibung**  
**Product description**

1	<b>Produktdetails</b> <i>Product details</i>	PVC-Bodenbelag <i>PVC Floor Covering</i>
2	<b>Hersteller</b> <i>Manufacturer</i>	
3	<b>Model / Programm</b> <i>Model / program</i>	Luxory vinyl tile, Thickness: 5.0/0.55 mm, UV coating
4	<b>Abmessung/</b> <i>Dimension</i>	457 mm x 457 mm x 5 mm
5	<b>Artikel Nummer</b> <i>Article number</i>	N/A
6	<b>Chargen Nummer</b> <i>Batch number</i>	ITT samples
7	<b>Produktionsdatum</b> <i>Date of production</i>	05.04.2015 2015-04-05
8	<b>Verpackungsdatum</b> <i>Date of packaging</i>	06.04.2015 2015-04-06
9	<b>Sonstiges</b> <i>Other</i>	Die detaillierten Untersuchungsergebnisse können der ADAM-Auswertemaske im Anhang entnommen werden./ <i>Detailed information about the test results can be found in the attached ADAM evaluation mask.</i>
		

<b>Prüfbericht-Nr.: 21233119 002</b> <i>Test Report No.:</i>		Seite 4 von 10 <i>Page 4 of 10</i>	
Absatz	<b>DEVL1101903D</b>	Messergebnisse - Bemerkungen	Bewertung
<i>Clause</i>	<i>Anforderungen - Prüfungen / Requirements - Tests</i>	<i>Measuring results - Remarks</i>	<i>Evaluation</i>

## 1. Untersuchungsmethode / *Examination method*

### 1.1 Prüfkammermessung / *Emission test chamber*

Die Prüfkammeruntersuchung erfolgte entsprechend der DIN EN ISO 16000-9: Innenraumluftverunreinigungen – Teil 9: Bestimmung der Emission von flüchtigen organischen Verbindungen aus Bauprodukten und Einrichtungsgegenständen – Emissionsprüfkammer-Verfahren.

*Testing in the test chamber was performed in accordance with DIN EN ISO 16000-9: Indoor air pollution – Part 9: Determining the emissions of volatile organic compounds from building materials and furnishings – Emission test chamber method.*

Klimabedingungen<sup>\*)</sup> / *Climatic conditions<sup>\*)</sup>:*

Kammervolumen / <i>Chamber volume:</i>	0.25 m <sup>3</sup>
Temperatur / <i>Temperature:</i>	(23 ± 1) °C
Rel. Luftfeuchtigkeit / <i>Rel. air humidity:</i>	50 % ± 3 %
Luftgeschwindigkeit / <i>Air velocity:</i>	0.1 bis 0.3 m/s
Luftwechselrate / <i>Air exchange rate:</i>	1.25 m <sup>3</sup> /(m <sup>2</sup> h) ± 0.01 m <sup>3</sup> /(m <sup>2</sup> h)

*\*) Zahlenangaben in englischer Schreibweise / Values in English notation*

Folgende Probenahmen wurden durchgeführt:

Konditionierungsdauer 3 Tage

- VOC, mittels Tenax-Röhrchen, Analyse durch Thermodesorber/GC-MS
- Aldehyde, DNPH-Methode, Analyse durch HPLC/DAD

Konditionierungsdauer 7 Tage

- VOC, mittels Tenax-Röhrchen, Analyse durch Thermodesorber/GC-MS
- Aldehyde, DNPH-Methode, Analyse durch HPLC/DAD

GC Systembeschreibung:

- GC - Agilent 6890N, MS - Agilent 5973, Thermodesorber - Perkin Elmer ATD 400
- Säule RTX-200, 60 m x 0,32 mm x 1 µm von Restek

HPLC-Systembeschreibung:

- HPLC - Agilent 1200-System mit Dioden Array Detector (DAD)
- Macherey & Nagel, EC50/4 Nucleodur Sphinx RP 1.8 µm

**Prüfbericht-Nr.: 21233119 002**  
*Test Report No.:*

Seite 5 von 10  
Page 5 of 10

Absatz	<b>DEVL1101903D</b>	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / <i>Requirements - Tests</i>	<i>Measuring results - Remarks</i>	<i>Evaluation</i>

*Sampling was performed as follows:*

*3 days of conditioning*

- VOC, using Tenax tubes, analysed using thermo desorption/GC-MS
- aldehydes, DNPH technique, analysed using HPLC/DAD

*7 days of conditioning*

- VOC, using Tenax tubes, analysed using thermo desorption/GC-MS
- aldehydes, DNPH technique, analysed using HPLC/DAD

*GC system description:*

- GC - Agilent 6890N, MS - Agilent 5973, Thermodesorber - Perkin Elmer ATD 400
- Restek GC-column RTX-200, 60 m x 0.32 mm x 1 µm

*HPLC system description:*

- HPLC - Agilent 1100/1200-system, Dioden Array Detector (DAD)
- column Macherey & Nagel, EC50/4 Nucleodur Sphinx RP 1.8 µm

## 1.2 Prüfmethoden / *Test methods*

DIN ISO 16000-3:2013-01: Innenraumluftverunreinigungen - Teil 3: Messen von Formaldehyd und anderen Carbonylverbindungen in der Innenraumluft und in Prüfkammern - Probenahme mit einer Pumpe (ISO 16000-3:2011)

DIN ISO 16000-6:2012-11: Innenraumluftverunreinigungen - Teil 6: Bestimmung von VOC in der Innenraumluft und in Prüfkammern, Probenahme auf Tenax TA®, thermische Desorption und Gaschromatographie mit MS oder MS-FID (ISO 16000-6:2011)

DIN EN ISO 16000-9:2008-04: Innenraumluftverunreinigungen - Teil 9: Bestimmung der Emission von flüchtigen organischen Verbindungen aus Bauprodukten und Einrichtungsgegenständen - Emissionsprüfkammer-Verfahren (ISO 16000-9:2006); Deutsche Fassung EN ISO 16000-9:2006

<b>Prüfbericht-Nr.: 21233119 002</b>			Seite 6 von 10
Test Report No.:			Page 6 of 10
Absatz	<b>DEVL1101903D</b>	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

*DIN ISO 16000-3:2013-01: Indoor air - Part 3: Determination of formaldehyde and other carbonyl compounds in indoor air and test chamber air - Active sampling method (ISO 16000-3:2011)*

*DIN ISO 16000-6:2012-11: Indoor air - Part 6: Determination of volatile organic compounds in indoor and test chamber air by active sampling on Tenax TA® sorbent, thermal desorption and gas chromatography using MS or MS-FID (ISO 16000-6:2011)*

*DIN EN ISO 16000-9:2008-04: Indoor air - Part 9: Determination of the emission of volatile organic compounds from building products and furnishing - Emission test chamber method (ISO 16000-9:2006); German version EN ISO 16000-9:2006*

## 2. Untersuchungsergebnisse / Examination results

Die detaillierten Untersuchungsergebnisse können der Tabelle 1 und der Einzelstoffliste im Anhang entnommen werden.

*The detailed examination results can be seen in table 1 and in the attached list of detected compounds.*

Prüfbericht-Nr.: 21233119 002  
Test Report No.:

Seite 7 von 10  
Page 7 of 10

Absatz	DEVL1101903D	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

Table 1: Einstufung entsprechend Décret n° 2011-321  
Table 1: Classification according to Décret n° 2011-321

Substances	CAS Nr. Cas no	Emission Class [µg/m <sup>3</sup> ]				Test results after 7 days [µg/m <sup>3</sup> ]
		A+	A	B	C	
Formaldehyd Formaldehyde	50-00-0	< 10	< 60	< 120	> 120	2
Acetaldehyd Acetaldehyde	75-07-0	< 200	< 300	< 400	> 400	2
Toluol Toluene	108-88-3	< 300	< 450	< 600	> 600	79
Tetrachlorethylen Tetrachloroethylene	127-18-4	< 250	< 350	< 500	> 500	< 1
Xylol Xylene	1330-20-7	< 200	< 300	< 400	> 400	< 1
1,2,4-Trimethylbenzol 1,2,4-Trimethylbenzene	95-63-6	< 1,000	< 1,500	< 2,000	> 2,000	< 1
1,4-Dichlorobenzol 1,4-Dichlorobenzene	106-46-7	< 60	< 90	< 120	> 120	< 1
Ethylbenzol Ethylbenzene	100-41-4	< 750	< 1,000	< 1,500	> 1,500	< 1
2-Butoxyethanol 2-Butoxyethanol	111-76-2	< 1,000	< 1,500	< 2,000	> 2,000	< 1
Styrol Styrene	100-42-5	< 250	< 350	< 500	> 500	< 1
TVOC <sup>1</sup>	- / -	< 1,000	< 1,500	< 2,000	> 2,000	162


<sup>1</sup> TVOC: Summe flüchtige organische Verbindungen im Retentionszeitbereich C<sub>6</sub> – C<sub>22</sub> / TVOC: total volatile organic compounds within retention range of C<sub>6</sub> – C<sub>22</sub>

<b>Prüfbericht-Nr.: 21233119 002</b> <i>Test Report No.:</i>		Seite 8 von 10 <i>Page 8 of 10</i>	
Absatz	DEVL1101903D	Messergebnisse - Bemerkungen	Bewertung
<i>Clause</i>	<i>Anforderungen - Prüfungen / Requirements - Tests</i>	<i>Measuring results - Remarks</i>	<i>Evaluation</i>

### 3. Beurteilung / Evaluation

Das geprüfte Produkt „Luxury vinyl tile“ wurde entsprechend der französischen VOC-Kennzeichnungsverordnung Décret DEVL1101903D, veröffentlicht am 23. März 2011 und des Erlasses Arrêté DEVL1104875A, veröffentlicht am 13. Mai 2011 in die Emissionsklasse A+ eingestuft.

*The tested product “Luxury vinyl tile” has been evaluated to the French VOC labelling regulation as published on March 23, 2011 (Décret DEVL1101903D) and the order as published on May 13, 2011 (Arrêté DEVL1104875A) as emission class A+.*

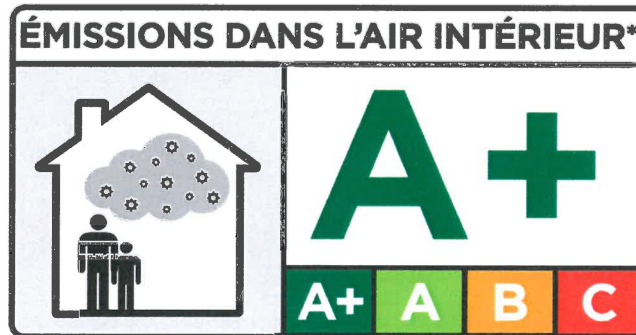

Prüfbericht-Nr.: 21233119 002  
Test Report No.:

Seite 9 von 10  
Page 9 of 10

Absatz	DEVL1101903D	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

Tabelle 2. Detektierte Einzelkomponenten in  $\mu\text{g}/\text{m}^3$   
Table 2: Detected compounds in  $\mu\text{g}/\text{m}^3$

Substanz / Compound	CAS #	Konzentration / Concentration	
		3 Tage / 3 days	7 Tage / 7 days
Formaldehyd (VVOC) / Formaldehyde (VVOC) <sup>1)</sup>	50-00-0	2.0	1.8
Acetaldehyd (VVOC) / Acetaldehyde (VVOC)	75-07-0	2.0	1.6
Toluol / Toluene <sup>2)</sup>	108-88-3	86	79
n-Butanol / n-Butanol	71-36-3	1.9	1.9
2-Ethyl-1-hexanol / 2-Ethyl-1-hexanol	104-76-7	7.2	4.4
1-Methoxy-2-propanol / 1-Methoxy-2-propanol	107-98-2	1.6	1.1
n-Nonanal / n-Nonanal	124-19-6	3.0	2.3
n-Decanal / n-Decanal	112-31-2	2.0	2.3
Aceton (VVOC) / Acetone (VVOC)	67-64-1	4.7	3.6
Butanon / Butanone	78-93-3	53	37
4-Methyl-2-pentanon / 4-Methyl-2-pentanone	108-10-1	1.7	1.4
Cyclohexanon / Cyclohexanone	108-94-1	3.0	2.9
Ethylacetat (VVOC) / Ethyl acetate (VVOC)	141-78-6	7.1	5.2
n-Butylacetat / n-Butyl acetate	123-86-4	2.3	1.9
Dimethylphthalat / Methyl phthalate (SVOC) <sup>3)</sup>	131-11-3	2.7	1.2
n-Propylacetat / n-Propyl acetate	109-60-4	27	23
2-Phenylpropen / 2-Phenylpropene	98-83-9	1.4	1.1
Benzaldehyd / Benzaldehyde	100-52-7	2.5	1.9
Acetophenon / Acetophenone	98-86-2	2.0	1.4

<sup>1)</sup> VVOC: leichtflüchtige organische Verbindungen / VVOC: very volatile organic compounds

<sup>2)</sup> Reproduktionstoxizität, Kategorie 2, EG-Einstufung gemäß Verordnung (EG) Nr. 1272/2008 / Reproductive toxicity, Category 2, EC classification according to Regulation (EC) No 1272/2008

<sup>3)</sup> SVOC: schwerflüchtige organische Verbindungen / SVOC: semi volatile organic compounds

<b>Prüfbericht-Nr.: 21233119 002</b> <i>Test Report No.:</i>		Seite 10 von 10 <i>Page 10 of 10</i>	
Absatz <i>Clause</i>	<b>DEVL1101903D</b> <i>Anforderungen - Prüfungen / Requirements - Tests</i>	Messergebnisse - Bemerkungen <i>Measuring results - Remarks</i>	Bewertung <i>Evaluation</i>

## Attestation

Based on the Test Report No. 21233119 002 the product

Luxury vinyl tile, Article No.: N/A




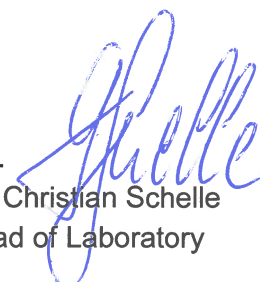
has been evaluated in compliance with the French VOC labelling regulation as published on March 23, 2011 (Décret DEVL1101903D) and the order as published on May 13, 2011 (Arrêté DEVL1104875A) as

Emission class A+



11.05.2015

  
i. A.  
Dr. Bernd Maciej  
Expert

  
i. V.  
Dr. Christian Schelle  
Head of Laboratory



**Test Report  
(SVHC)**

No. CANEC1513030015

Date: 31 Jul 2015

Page 1 of 15



The following sample(s) was/were submitted and identified on behalf of the clients as : Hot Melt Adhesive

SGS Job No. : CP15-042965 - GZ

Tested Sample Info. : HM-811M

Client Ref. Info. : HM-811M, HM-815LKF, HM-866HF, HM-803KF, HM-805KF, HM-837KF, HM-868KF, HM-823K, HM-828T, HM-837, HM-801Y, HM-825, HM-806, HM-823L, HM-868, HM-801E, HM-805, HM-256, HM-259PF, HM-220

Date of Sample Received : 27 Jul 2015

Testing Period : 27 Jul 2015 - 31 Jul 2015

Test Requested : As requested by client, SVHC screening is performed according to:  
(i) One hundred and sixty three (163) substances in the Candidate List of Substances of Very High Concern (SVHC) for authorization published by European Chemicals Agency (ECHA) on and before Jun 15, 2015 regarding Regulation (EC) No 1907/2006 concerning the REACH.

Test Results : Please refer to next page(s).

Summary :

According to the specified scope and analytical techniques, concentrations of tested SVHC are $\leq 0.1\%$ (w/w) in the submitted sample.	PASS
---	------

Signed for and on behalf of  
SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch



Almay Gao  
Approved Signatory



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Standards Technical Services Chemical Laboratory

198 Kezhu Road, Sciencetech Park Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075113 www.sgsgroup.com.cn  
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075113 e sgs.china@sgs.com

## Test Report (SVHC)

No. CANEC1513030015

Date: 31 Jul 2015

Page 2 of 15

### Remark :

(1) The chemical analysis of specified SVHC is performed by means of currently available analytical techniques against the following SVHC related documents published by ECHA:  
<http://echa.europa.eu/web/guest/candidate-list-table>  
 These lists are under evaluation by ECHA and may subject to change in the future.

(2) Concerning article(s):

In accordance with Regulation (EC) No 1907/2006, any EU producer or importer of articles shall notify ECHA, in accordance with paragraph 4 of Article 7, if a substance meets the criteria in Article 57 and is identified in accordance with Article 59(1) of the Regulation, if (a) the substance in the Candidate List is present in those articles in quantities totaling over one tonne per producer or importer per year; and (b) the substance in the Candidate List is present in those articles above a concentration of 0.1% weight by weight (w/w).

Article 33 of Regulation (EC) No 1907/2006 requires supplier of an article containing a substance meeting the criteria in Article 57 and identified in accordance with Article 59(1) in a concentration above 0.1% weight by weight (w/w) shall provide the recipient of the article with sufficient information, available to the supplier, to allow safe use of the article including, as a minimum, the name of that substance in the Candidate List.

SGS adopts the interpretation of ECHA for SVHC in article unless indicated otherwise. Detail explanation is available at the following link:

[http://webstage.contribute.sgs.net/corpreach/documents/SGS-CTS\\_SVHC-paper-EN-11.pdf](http://webstage.contribute.sgs.net/corpreach/documents/SGS-CTS_SVHC-paper-EN-11.pdf)

(3) Concerning material(s):

Test results in this report are based on the tested sample. This report refers to testing result of tested sample submitted as homogenous material(s). In case such material is being used to compose an article, the results indicated in this report may not represent SVHC concentration in such article. If this report refers to testing result of composite material group by equal weight proportion, the material in each composite test group may come from more than one article.

If the sample is a substance or mixture, and it directly exports to EU, client has the obligation to comply with the supply chain communication obligation under Article 31 of Regulation (EC) No. 1907/2006 and the conditions of Authorization of substance of very high concern included in the Annex XIV of the Regulation (EC) No. 1907/2006.

(4) Concerning substance and preparation:

If a SVHC is found over 0.1% (w/w) and/or the specific concentration limit which is set in Regulation (EC) No 1272/2008 and No 790/2009, client is suggested to prepare a Safety Data Sheet (SDS) against the SVHC to comply with the supply chain communication obligation under Regulation (EC) No 1907/2006, in which:

- a substance that is classified as hazardous under the CLP Regulation (EC) No 1272/2008.

- a mixture that is classified as dangerous according Dangerous Preparations Directive



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

## Test Report (SVHC)

No. CANEC1513030015

Date: 31 Jul 2015

Page 3 of 15

1999/45/EC or classified as hazardous under the CLP Regulation (EC) No 1272/2008, when their concentrations are equal to, or greater than, those defined in the Article 3(3) of 1999/45/EC or the lower values given in Part 3 of Annex VI of Regulation (EC) No. 1272/2008;

or

- a mixture is not classified as dangerous under Directive 1999/45/EC, but contains either:

- (a) a substance posing human health or environmental hazards in an individual concentration of  $\geq 1\%$  by weight for mixtures that are solid or liquids (i.e., non-gaseous mixtures) or  $\geq 0.2\%$  by volume for gaseous mixtures; or
- (b) a substance that is PBT, or vPvB in an individual concentration of  $\geq 0.1\%$  by weight for mixtures that are solid or liquids (i.e., non-gaseous mixtures); or
- (c) a substance on the SVHC candidate list (for reasons other than those listed above), in an individual concentration of  $\geq 0.1\%$  by weight for non-gaseous mixtures; or
- (d) a substance for which there are Europe-wide workplace exposure limits.

- (5) If a SVHC is found over the reporting limit, client is suggested to identify the component which contains the SVHC and the exact concentration of the SVHC by requesting further quantitative analysis from the laboratory.

### Test Sample :

#### Sample Description :

Specimen No.	SGS Sample ID	Description
SN1	CAN15-130300.008	Transparent soft material

### Test Method :

SGS In-House method- GZTC CHEM-TOP-092-01, GZTC CHEM-TOP-092-02, Analyzed by ICP-OES, UV-VIS, GC-MS, HPLC-DAD/MS and Colorimetric Method.



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CTI Standards Technical Services Co., Ltd.  
Guangzhou Chemical Laboratory

198 Kezhu Road, Sciencetech Park Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075113 www.sgsgroup.com.cn  
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075113 e sgs.china@sgs.com

# Test Report (SVHC)

No. CANEC1513030015

Date: 31 Jul 2015

Page 4 of 15

## Test Result: (Substances in the Candidate List of SVHC)

Batch	Substance Name	CAS No.	008 Concentration (%)	RL (%)
-	All tested SVHC in candidate list	-	ND	-

### Notes :

1. The table above only shows detected SVHC, and SVHC that below RL are not reported. Please refer to Appendix for the full list of tested SVHC.
2. RL = Reporting Limit. All RL are based on homogenous material. ND = Not detected (lower than RL), ND is denoted on the SVHC substance.
3. \*The test result is based on the calculation of selected element(s) / marker(s) and to the worst-case scenario. For detail information, please refer to the SGS REACH website: [www.reach.sgs.com/substance-of-very-high-concern-analysis-information-page.htm](http://www.reach.sgs.com/substance-of-very-high-concern-analysis-information-page.htm).
4. RL = 0.005% is evaluated for element (i.e. cobalt, arsenic, lead, chromium (VI), aluminum, zirconium, boron, strontium, zinc, antimony, cadmium, titanium and barium respectively), except molybdenum RL=0.0005%, boron RL=0.0025% (only for Lead bis(tetrafluoroborate)).
5. Calculated concentration of boric compounds are based on the water extractive boron by ICP-OES.
6. Δ CAS No. of diastereoisomers identified (α-HBCDD, β-HBCDD, γ-HBCDD): 134237-50-6, 134237-51-7, 134237-52-8.
7. ☆ CAS No. of Hexahydromethylphthalic anhydride, Hexahydro-4-methylphthalic anhydride, Hexahydro-1-methylphthalic anhydride, Hexahydro-3-methylphthalic anhydride: 25550-51-0, 19438-60-9, 48122-14-1, 57110-29-9; EC No. of those: 247-094-1, 243-072-0, 256-356-4, 260-566-1.
8. § The substance is proposed for the identification as SVHC only where it contains Michler's ketone (CAS Number: 90-94-8) or Michler's base (CAS Number: 101-61-1) ≥0.1% (w/w).



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

# Test Report (SVHC)

No. CANEC1513030015

Date: 31 Jul 2015

Page 5 of 15

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
I	1	4,4' -Diaminodiphenylmethane(MDA)	101-77-9	0.050
I	2	5-tert-butyl-2,4,6-trinitro-m-xylene (musk xylene)	81-15-2	0.050
I	3	Alkanes, C10-13, chloro (Short Chain Chlorinated Paraffins)	85535-84-8	0.050
I	4	Anthracene	120-12-7	0.050
I	5	Benzyl butyl phthalate (BBP)	85-68-7	0.050
I	6	Bis (2-ethylhexyl)phthalate (DEHP)	117-81-7	0.050
I	7	Bis(tributyltin)oxide (TBTO)	56-35-9	0.050
I	8	Cobalt dichloride*	7646-79-9	0.005
I	9	Diarsenic pentaoxide*	1303-28-2	0.005
I	10	Diarsenic trioxide*	1327-53-3	0.005
I	11	Dibutyl phthalate (DBP)	84-74-2	0.050
I	12	Hexabromocyclododecane (HBCDD) and all major diastereoisomers identified ( $\alpha$ -HBCDD, $\beta$ -HBCDD, $\gamma$ -HBCDD) <sup>Δ</sup>	25637-99-4, 3194- 55-6	0.050
I	13	Lead hydrogen arsenate*	7784-40-9	0.005
I	14	Sodium dichromate*	7789-12-0, 10588-01-9	0.005
I	15	Triethyl arsenate*	15606-95-8	0.005
II	16	2,4-Dinitrotoluene	121-14-2	0.050
II	17	Acrylamide	79-06-1	0.050
II	18	Anthracene oil*	90640-80-5	0.050
II	19	Anthracene oil, anthracene paste*	90640-81-6	0.050
II	20	Anthracene oil, anthracene paste, anthracene fraction*	91995-15-2	0.050



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

# Test Report (SVHC)

No. CANEC1513030015

Date: 31 Jul 2015

Page 6 of 15

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
II	21	Anthracene oil, anthracene paste, distn. lights*	91995-17-4	0.050
II	22	Anthracene oil, anthracene-low*	90640-82-7	0.050
II	23	Diisobutyl phthalate	84-69-5	0.050
II	24	Lead chromate*	7758-97-6	0.005
II	25	Lead chromate molybdate sulphate red (C.I. Pigment Red 104)*	12656-85-8	0.005
II	26	Lead sulfochromate yellow (C.I. Pigment Yellow 34)*	1344-37-2	0.005
II	27	Pitch, coal tar, high temp.*	65996-93-2	0.050
II	28	Tris(2-chloroethyl)phosphate	115-96-8	0.050
III	29	Ammonium dichromate*	7789-09-5	0.005
III	30	Boric acid*	10043-35-3, 11113-50-1	0.005
III	31	Disodium tetraborate, anhydrous*	1303-96-4, 1330-43-4, 12179-04-3	0.005
III	32	Potassium chromate*	7789-00-6	0.005
III	33	Potassium dichromate*	7778-50-9	0.005
III	34	Sodium chromate*	7775-11-3	0.005
III	35	Tetraboron disodium heptaoxide, hydrate*	12267-73-1	0.005
III	36	Trichloroethylene	79-01-6	0.050
IV	37	2-Ethoxyethanol	110-80-5	0.050
IV	38	2-Methoxyethanol	109-86-4	0.050
IV	39	Chromic acid, Oligomers of chromic acid and dichromic acid, Dichromic acid*	7738-94-5 - 13530-68-2	0.005



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

# Test Report (SVHC)

No. CANEC1513030015

Date: 31 Jul 2015

Page 7 of 15

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
IV	40	Chromium trioxide*	1333-82-0	0.005
IV	41	Cobalt(II) carbonate*	513-79-1	0.005
IV	42	Cobalt(II) diacetate*	71-48-7	0.005
IV	43	Cobalt(II) dinitrate*	10141-05-6	0.005
IV	44	Cobalt(II) sulphate*	10124-43-3	0.005
V	45	1,2,3-trichloropropane	96-18-4	0.050
V	46	1,2-Benzenedicarboxylic acid, di-C6-8-branched alkyl esters, C7-rich	71888-89-6	0.050
V	47	1,2-Benzenedicarboxylic acid, di-C7-11-branched and linear alkyl esters	68515-42-4	0.050
V	48	1-methyl-2-pyrrolidone	872-50-4	0.050
V	49	2-ethoxyethyl acetate	111-15-9	0.050
V	50	Hydrazine	7803-57-8, 302-01-2	0.050
V	51	Strontium chromate*	7789-06-2	0.005
VI	52	1,2-Dichloroethane	107-06-2	0.050
VI	53	2,2'-dichloro-4,4'-methylenedianiline	101-14-4	0.050
VI	54	2-Methoxyaniline; o-Anisidine	90-04-0	0.050
VI	55	4-(1,1,3,3-tetramethylbutyl)phenol	140-66-9	0.050
VI	56	Aluminosilicate Refractory Ceramic Fibres *	650-017-00-8 (Index no.)	0.005
VI	57	Arsenic acid*	7778-39-4	0.005
VI	58	Bis(2-methoxyethyl) ether	111-96-6	0.050
VI	59	Bis(2-methoxyethyl) phthalate	117-82-8	0.050



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

# Test Report (SVHC)

No. CANEC1513030015

Date: 31 Jul 2015

Page 8 of 15

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
VI	60	Calcium arsenate*	7778-44-1	0.005
VI	61	Dichromium tris(chromate) *	24613-89-6	0.005
VI	62	Formaldehyde, oligomeric reaction products with aniline	25214-70-4	0.050
VI	63	Lead diazide, Lead azide*	13424-46-9	0.005
VI	64	Lead dipicrate*	6477-64-1	0.005
VI	65	Lead styphnate*	15245-44-0	0.005
VI	66	N,N-dimethylacetamide	127-19-5	0.050
VI	67	Pentazinc chromate octahydroxide*	49663-84-5	0.005
VI	68	Phenolphthalein	77-09-8	0.050
VI	69	Potassium hydroxyoctaoxodizincatedichromate*	11103-86-9	0.005
VI	70	Trilead diarsenate*	3687-31-8	0.005
VI	71	Zirconia Aluminosilicate Refractory Ceramic Fibres*	650-017-00-8 (Index no.)	0.005
VII	72	[4-[[4-anilino-1-naphthyl][4-(dimethylamino)phenyl]methylene]cyclohexa-2,5-dien-1-ylidene] dimethylammonium chloride (C.I. Basic Blue 26)§	2580-56-5	0.050
VII	73	[4-[4,4'-bis(dimethylamino) benzhydrylidene]cyclohexa-2,5-dien-1-ylidene]dimethylamm onium chloride (C.I. Basic Violet 3)§	548-62-9	0.050
VII	74	1,2-bis(2-methoxyethoxy)ethane (TEGDME; triglyme)	112-49-2	0.050
VII	75	1,2-dimethoxyethane; ethylene glycol dimethyl ether (EGDME)	110-71-4	0.050
VII	76	4,4'-bis(dimethylamino) benzophenone (Michler's Ketone)	90-94-8	0.050
VII	77	4,4'-bis(dimethylamino)-4''-(methylamino)trityl alcohol§	561-41-1	0.050
VII	78	Diboron trioxide*	1303-86-2	0.005



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



# Test Report (SVHC)

No. CANEC1513030015

Date: 31 Jul 2015

Page 9 of 15

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
VII	79	Formamide	75-12-7	0.050
VII	80	Lead(II) bis(methanesulfonate)*	17570-76-2	0.005
VII	81	N,N,N',N'-tetramethyl-4,4'-methylenedianiline (Michler's base)	101-61-1	0.050
VII	82	TGIC (1,3,5-tris(oxiranylmethyl)-1,3,5-triazine-2,4,6-(1H,3H,5H)-trione)	2451-62-9	0.050
VII	83	$\alpha,\alpha$ -Bis[4-(dimethylamino)phenyl]-4(phenylamino)naphthalene-1-methanol (C.I. Solvent Blue 4) §	6786-83-0	0.050
VII	84	$\beta$ -TGIC (1,3,5-tris[(2S and 2R)-2,3-epoxypropyl]-1,3,5-triazine-2,4,6-(1H,3H,5H)-trione)	59653-74-6	0.050
VIII	85	[Phthalato(2-)]dioxotrilead*	69011-06-9	0.005
VIII	86	1,2-Benzenedicarboxylic acid, dipentylester, branched and linear	84777-06-0	0.050
VIII	87	1,2-Diethoxyethane	629-14-1	0.050
VIII	88	1-Bromopropane	106-94-5	0.050
VIII	89	3-Ethyl-2-methyl-2-(3-methylbutyl)-1,3-oxazolidine	143860-04-2	0.050
VIII	90	4-(1,1,3,3-tetramethylbutyl)phenol, ethoxylated	-	0.050
VIII	91	4,4'-Methylenedi-o-toluidine	838-88-0	0.050
VIII	92	4,4'-Oxydianiline and its salts	101-80-4	0.050
VIII	93	4-Aminoazobenzene	60-09-3	0.050
VIII	94	4-Methyl-m-phenylenediamine	95-80-7	0.050
VIII	95	4-Nonylphenol, branched and linear	-	0.050
VIII	96	6-Methoxy-m-toluidine	120-71-8	0.050
VIII	97	Acetic acid, lead salt, basic*	51404-69-4	0.005



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

# Test Report (SVHC)

No. CANEC1513030015

Date: 31 Jul 2015

Page 10 of 15

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
VIII	98	Biphenyl-4-ylamine	92-67-1	0.050
VIII	99	Bis(pentabromophenyl) ether (DecaBDE)	1163-19-5	0.050
VIII	100	Cyclohexane-1,2-dicarboxylic anhydride, cis-cyclohexane-1,2-dicarboxylic anhydride, trans-cyclohexane-1,2-dicarboxylic anhydride	85-42-7, 13149-00-3, 14166-21-3	0.050
VIII	101	Diazene-1,2-dicarboxamide (C,C'-azodi(formamide))	123-77-3	0.050
VIII	102	Dibutyltin dichloride (DBTC)	683-18-1	0.050
VIII	103	Diethyl sulphate	64-67-5	0.050
VIII	104	Diisopentylphthalate	605-50-5	0.050
VIII	105	Dimethyl sulphate	77-78-1	0.050
VIII	106	Dinoseb	88-85-7	0.050
VIII	107	Dioxobis(stearato)trilead*	12578-12-0	0.005
VIII	108	Fatty acids, C16-18, lead salts*	91031-62-8	0.005
VIII	109	Furan	110-00-9	0.050
VIII	110	Henicosafuoroundecanoic acid	2058-94-8	0.050
VIII	111	Heptacosafuorotetradecanoic acid	376-06-7	0.050
VIII	112	Hexahydromethylphthalic anhydride, Hexahydro-4-methylphthalic anhydride, Hexahydro-1-methylphthalic anhydride, Hexahydro-3-methylphthalic anhydride	☆	0.050
VIII	113	Lead bis(tetrafluoroborate)*	13814-96-5	0.005
VIII	114	Lead cyanamidate*	20837-86-9	0.005
VIII	115	Lead dinitrate*	10099-74-8	0.005
VIII	116	Lead monoxide*	1317-36-8	0.005



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS Standards Technical Services Co., Ltd.  
Guangzhou Standard Technical Services Laboratory

198 Kezhu Road, Sciotech Park Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075113 www.sgsgroup.com.cn  
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075113 e [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

# Test Report (SVHC)

No. CANEC1513030015

Date: 31 Jul 2015

Page 11 of 15

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
VIII	117	Lead oxide sulfate*	12036-76-9	0.005
VIII	118	Lead tetroxide (orange lead)*	1314-41-6	0.005
VIII	119	Lead titanium trioxide*	12060-00-3	0.005
VIII	120	Lead titanium zirconium oxide*	12626-81-2	0.005
VIII	121	Methoxyacetic acid	625-45-6	0.050
VIII	122	Methyloxirane (Propylene oxide)	75-56-9	0.050
VIII	123	N,N-dimethylformamide	68-12-2	0.050
VIII	124	N-Methylacetamide	79-16-3	0.050
VIII	125	N-Pentyl-isopentylphthalate	776297-69-9	0.050
VIII	126	o-Aminoazotoluene	97-56-3	0.050
VIII	127	o-Toluidine	95-53-4	0.050
VIII	128	Pentacosfluorotridecanoic acid	72629-94-8	0.050
VIII	129	Pentalead tetraoxide sulphate*	12065-90-6	0.005
VIII	130	Pyrochlore, antimony lead yellow*	8012-00-8	0.005
VIII	131	Silicic acid, barium salt, lead-doped*	68784-75-8	0.005
VIII	132	Silicic acid, lead salt*	11120-22-2	0.005
VIII	133	Sulfurous acid, lead salt, dibasic*	62229-08-7	0.005
VIII	134	Tetraethyllead*	78-00-2	0.005
VIII	135	Tetralead trioxide sulphate*	12202-17-4	0.005
VIII	136	Tricosfluorododecanoic acid	307-55-1	0.050
VIII	137	Trilead bis(carbonate)dihydroxide (basic lead carbonate)*	1319-46-6	0.005



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

# Test Report (SVHC)

No. CANEC1513030015

Date: 31 Jul 2015

Page 12 of 15

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
VIII	138	Trilead dioxide phosphonate*	12141-20-7	0.005
IX	139	4-Nonylphenol, branched and linear, ethoxylated	-	0.050
IX	140	Ammonium pentadecafluorooctanoate (APFO)	3825-26-1	0.050
IX	141	Cadmium oxide*	1306-19-0	0.005
IX	142	Cadmium*	7440-43-9	0.005
IX	143	Dipentyl phthalate (DPP)	131-18-0	0.050
IX	144	Pentadecafluorooctanoic acid (PFOA)	335-67-1	0.050
X	145	Cadmium sulphide*	1306-23-6	0.005
X	146	Dihexyl phthalate	84-75-3	0.050
X	147	Disodium 3,3'-[[1,1'-biphenyl]-4,4'-diylbis(azo)]bis(4-aminonaphthalene-1-sulphonate) (C.I. Direct Red 28)	573-58-0	0.050
X	148	Disodium 4-amino-3-[[4'-[(2,4-diaminophenyl)azo][1,1'-biphenyl]-4-yl]azo]-5-hydroxy-6-(phenylazo)naphthalene-2,7-disulphonate (C.I. Direct Black 38)	1937-37-7	0.050
X	149	Imidazolidine-2-thione; (2-imidazoline-2-thiol)	96-45-7	0.050
X	150	Lead di(acetate)*	301-04-2	0.005
X	151	Trixylyl phosphate	25155-23-1	0.050
XI	152	1,2-Benzenedicarboxylic acid, dihexyl ester, branched and linear	68515-50-4	0.050
XI	153	Cadmium chloride*	10108-64-2	0.005
XI	154	Sodium perborate; perboric acid, sodium salt*	-	0.005
XI	155	Sodium peroxometaborate*	7632-04-4	0.005



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

# Test Report (SVHC)

No. CANEC1513030015

Date: 31 Jul 2015

Page 13 of 15

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
XII	156	2-(2H-Benzotriazol-2-yl)-4,6-ditertpentylphenol (UV-328)	25973-55-1	0.050
XII	157	2-benzotriazol-2-yl-4,6-di-tert-butylphenol (UV-320)	3846-71-7	0.050
XII	158	2-Ethylhexyl 10-ethyl-4,4-dioctyl-7-oxo-8-oxa-3,5-dithia-4-stannatetradecanoate; DOTE	15571-58-1	0.050
XII	159	Reaction mass of 2-ethylhexyl 10-ethyl-4,4-dioctyl-7-oxo-8-oxa-3,5-dithia-4-stannatetradecanoate & 2-ethylhexyl 10-ethyl-4-[[2-[(2-ethylhexyl)oxy]-2-oxoethyl]thio]-4-octyl-7-oxo-8-oxa-3,5-dithia-4-stannatetradecanoate (reaction mass of DOTE & MOTE)	-	0.050
XII	160	Cadmium fluoride*	7790-79-6	0.005
XII	161	Cadmium sulphate*	10124-36-4, 31119-53-6	0.005
XIII	162	1,2-benzenedicarboxylic acid, di-C6-10-alkyl esters; 1,2-benzenedicarboxylic acid, mixed decyl and hexyl and octyl diesters with ≥ 0.3% of dihexyl phthalate	68515-51-5, 68648-93-1	0.050
XIII	163	5-sec-butyl-2-(2,4-dimethylcyclohex-3-en-1-yl)-5-methyl-1,3-dioxane [1], 5-sec-butyl-2-(4,6-dimethylcyclohex-3-en-1-yl)-5-methyl-1,3-dioxane [2] [covering any of the individual isomers of [1] and [2] or any combination thereof]	-	0.050



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)


SGS-CTI Standards Technical Services Co., Ltd.  
Guangzhou Chemical Laboratory

198 Kezhu Road, Sciencetech Park Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075113 www.sgs.com.cn  
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075113 e [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

ATTACHMENTS

SVHC Testing Flow Chart

- 1) Name of the person who made testing: Martin He / Alison Zhang
- 2) Name of the person in charge of testing: Cutey Yu

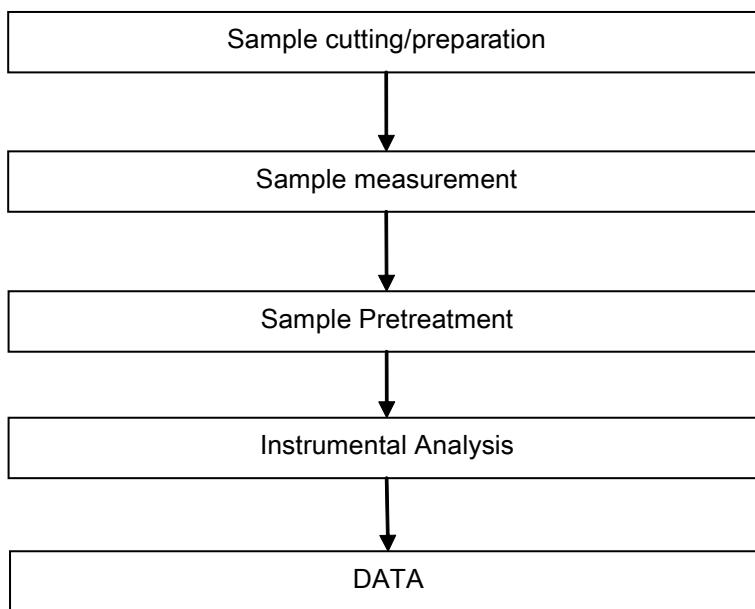

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)


## Test Report (SVHC)

No. CANEC1513030015

Date: 31 Jul 2015

Page 15 of 15

Sample photo:

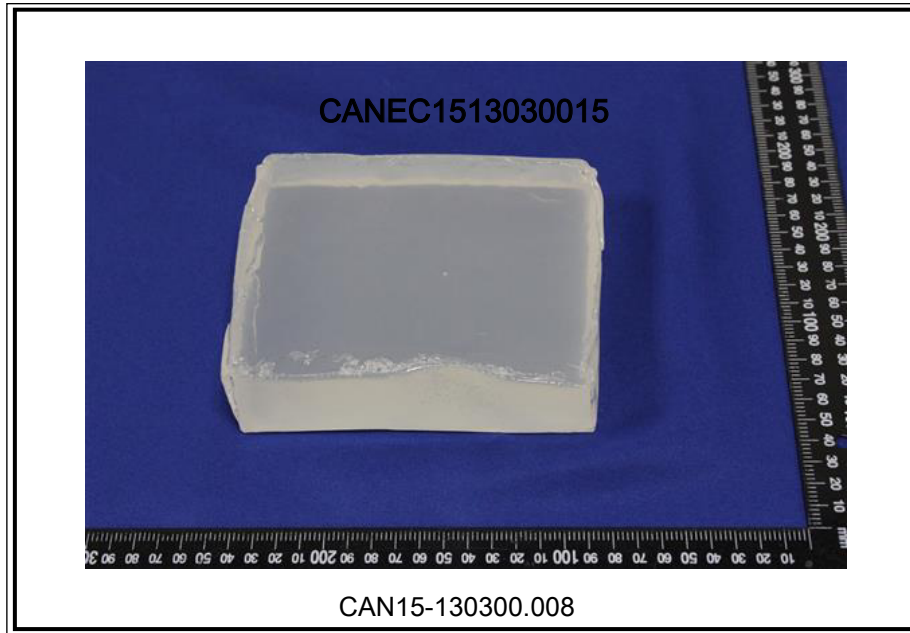

SGS authenticate the photo on original report only

\*\*\* End of Report \*\*\*

The following sample(s) was/were submitted and identified by the client as:

Sample Description

: PVC FLOOR TILE

Manufacturer



Sample Receiving Date

: APR.16,2012

Testing Period

: APR.16,2012 TO JUN.12,2012

Test Performed

: SELECTED TEST(S) AS REQUESTED BY APPLICANT

Test Requested

- : ALL OF THE FOLLOWING TEST ITEMS WERE CONDUCTED ACCORDING TO BS EN649:2011 AND THE STANDARD SPECIFIED BY CLIENT
1. RESISTANCE TO CHEMICALS(EN 423:1993)
  2. EFFECT OF A CASTOR CHAIR (EN 425:1994)
  3. SIDE LENGTH, SQUARENESS AND STRAIGHTNESS OF TILES (EN 427:1994)
  4. OVERALL THICKNESS (EN 428:1993)
  5. THE THICKNESS OF LAYERS (EN 429:1993)
  6. MASS PER UNIT AREA (EN 430:1994)
  7. PEELING STRENGTH OF LAYERS(EN 431:1994)
  8. RESIDUAL INDENTATION AFTER STATIC LOADING (EN433:1994)
  9. DIMENSIONAL STABILITY AND CURING AFTER EXPOSURE TO HEAT (EN434:1994)
  10. DETERMINATION OF FLEXIBILITY (EN 435:1994)
  11. WEAR RESISTANCE (EN660-2:1999)
  12. RESILIENT,TEXTILE AND LAMINATE FLOOR COVERINGS-CLASSIFICATION(EN685:2007)
  13. COLOR FASTNESS TO LIGHT(EN20 105-B02:1999)
  14. 8 TOXIC ELEMENT TEST(EN 71-3:1995)
  15. REACTION TO FIRE TEST(EN 13501-1:2007)
  16. SLIP RESISTANCE TEST (DIN 51130: 2010)
  17. DYNAMIC COEFFICIENT OF FRICTION ON DRY FLOOR SURFACES(EN 13893:2002)
  18. PHTHALATE CONTENT(EN 14372:2004)
  19. FUNGUS TEST(ASTM G21:1999)
  20. DETERMINATION OF DENSITY(EN 436:1994)

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [http://www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



# Test Report

No.: SHHG1204010946BM

Date: JUN.15,2012

Page: 2 of 7

Test Result(s)

: FOR FURTHER DETAILS, PLEASE REFER TO THE FOLLOWING PAGE(S)

Conclusion

: THE TEST DATA WERE PROVIDED TO CLIENT FOR THEIR OWN ANALYSIS.

\*\*\*\*\*

Signed for and on behalf of  
SGS-CSTC Ltd.

Yomoro Gu  
Supervisor

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [http://www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

## Test Report

No.: SHHG1204010946BM

Date: JUN.15,2012

Page: 3 of 7

### Test Conducted:

- 1. Resistance to chemicals (EN 423:1993)**
- 2. Effect of a castor chair (EN 425:1994)**
- 3. Side length, squareness and straightness of tiles (EN 427:1994)**
- 4. Overall thickness (EN 428:1993)**
- 5. The thickness of layers (EN 429:1993)**
- 6. Mass per unit area (EN 430:1994)**
- 7. Peeling strength of layers (EN 431:1994)**
- 8. Residual indentation after static loading (EN433:1994)**
- 9. Dimensional stability and curing after exposure to heat (EN434:1994)**
- 10. Determination of flexibility (EN 435:1994)**
- 11. Wear resistance (EN660-2:1999)**
- 12. Resilient, textile and laminate floor coverings-classification (EN685:2007)**
- 13. Color fastness to light (EN20 105-B02:1999)**
- 14. 8 Toxic element test (EN 71-3:1995)**
- 15. Reaction to fire test (EN 13501-1:2007)**
- 16. Slip resistance test (DIN 51130: 2010)**
- 17. Dynamic coefficient of friction on dry floor surfaces (EN 13893:2002)**
- 18. Phthalate content (EN 14372:2004)**
- 19. Fungus test (ASTM G21:1999)**
- 20. Determination of density (EN 436:1994)**

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [http://www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

# Test Report

No.: SHHG1204010946BM

Date: JUN.15,2012

Page: 4 of 7

Test Property	Test Method	Test requirements	Nominal	Result	Rating
Resistance to chemicals	EN 423:1993	Meet Class 0	--	Class 0	Pass
Effect of a castor chair	EN 425:1994	Record the nature of damage observed	--	No obvious damage	Pass
Side length, squareness and straightness of tiles	EN 427:1994	Squareness and straightness $\leq$ 0.25mm for side length $\leq$ 400mm, $\leq$ 0.35mm for side length $>$ 400mm)  Dimension: $\leq$ 0.13% of nominal length up to 0.5mm maximum	304.8x304.8 406.4x406.4 457.2x457.2 600x600 101.6x914.4 152.4x914.4 304.8x609.6 228.6x1219.2mm	Squareness, straightness: $<$ 0.25mm Dimension: $<$ 0.13%	Pass
Overall thickness	EN 428:1993	Average :nominal value $^{+0.13}_{-0.10}$ mm Individual : average value $\pm$ 0.15mm	2.0/2.5/3.0/ 4.0/5.0mm	Average : -0.02/ -0.01/0.03/ -0.04/0.05mm Individual : 0.07/-0.04; 0.04/-0.04; 0.04/-0.05; 0.06/-0.03; 0.03/-0.10mm	Pass
The thickness of layers	EN 429:1993	Average :nominal value $^{+13\%}_{-10\%}$ mm Individual : average value $\pm$ 0.05mm or 15% below	0.3/0.5/0.7 mm	0.32/0.53/ 0.74mm	Pass
Mass per unit area	EN 430:1994	Average :nominal value $^{+13\%}_{-10\%}$ mm	0.3/2.0 0.3/2.5 0.3/3.0 0.5/2.5 0.5/3.0 0.7/2.5 0.7/3.0	3704g/m <sup>2</sup> 4619g/m <sup>2</sup> 5819g/m <sup>2</sup> 4460g/m <sup>2</sup> 5330g/m <sup>2</sup> 4211g/m <sup>2</sup> 5232g/m <sup>2</sup>	--

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [http://www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

# Test Report

No.: SHHG1204010946BM

Date: JUN.15,2012

Page: 5 of 7

Test Property	Test Method	Test requirements	Nominal	Result	Rating
Peeling strength of layers	EN 431:1994	Record the test result	--	Len.90.6N Tran.91.1N	--
Residual indentation after static loading	EN433:1994	≤0.1mm	--	0.08mm	Pass
Dimensional stability and curing after exposure to heat	EN434:1994	Shrinkage ≤0.25% Curling ≤2mm	0.3/2.0 0.3/2.5 0.3/3.0 0.5/2.5 0.5/3.0 0.7/2.5 0.7/3.0	Len./Tran./Cur. 0.09%/0.09%/0.02 0.08%/0.05%/0.04 0.11%/0.09%/0.11 0.08%/0.02%/0.02 0.07%/0.06%/0.04 0.05%/0.03%/0.09 0.10%/0.07%/0.13	Pass
Determination of flexibility	EN 435:1994	Bend around 20mm mandrel shows no signs of cracking	--	Bend around 15mm mandrel shows no signs of cracking	Pass
Wear resistance	EN660-2:1999	≤2.0mm <sup>3</sup>	--	1.2mm <sup>3</sup> Wear group:T	Pass
Resilient, textile and laminate floor coverings-classification	EN685:2007	Record the Classification	0.3/2.0 0.3/2.5 0.3/3.0 0.5/2.5 0.5/3.0 0.7/2.5 0.7/3.0	23/31 23/31 23/31 32 32 34 34	--
Color fastness to light	EN20 105-B02:1999	≥Grade 6	--	≥Grade 6	Pass
8 Toxic element test	EN 71-3:1995	Pb ≤90PPM Sb ≤60PPM As ≤25PPM Ba ≤1000PPM Cd ≤75PPM Cr ≤60PPM Hg ≤60PPM Se ≤500PPM	--	<5 PPM <5 PPM <2.5 PPM <10 PPM <5 PPM <5 PPM <5 PPM <10 PPM	Pass

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [http://www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services Co., Ltd.  
Shanghai Branch of SGS-CSTC Testing and Certification Laboratory

3<sup>rd</sup> Building, No. 889, Yishan Road, Xuhui District Shanghai, China 200233  
中国·上海·徐汇区宜山路889号3号楼

t (86-21)61402666\*2013  
f (86-21)61402666\*2013

www.cn.sgs.com  
e sgs.china@sgs.com

# Test Report

No.: SHHG1204010946BM

Date: JUN.15,2012

Page: 6 of 7

Test Property	Test Method	Test requirements	Nominal	Result	Rating
Reaction to fire test	EN 13501-1:2007	Record the test result	--	B <sub>fl</sub> -S1	--
Slip resistance test	DIN 51130:2010	--	--	R9	--
Dynamic coefficient of friction on dry floor surfaces	EN 13893:2002	Record the test result	--	0.610	--
Phthalate content	EN 14372:2004	Total (DBP+BBP+DEHP) ≤ 0.1%ppm Total (DINP+DNOP+DIDP) ≤ 0.1%ppm		Total (DBP+BBP+D EHP): 0.01%ppm Total (DINP+DNOP +DIDP) ≤ 0.023%ppm	Pass
Fungus test	ASTM G21:1999	Record the test result	--	Grade 0	--
Determination of density	EN 436:1994	Record the test result	0.3/2.0 0.3/2.5 0.3/3.0 0.5/2.5 0.5/3.0 0.7/2.5 0.7/3.0	1719kg/m <sup>3</sup> 1823kg/m <sup>3</sup> 1840kg/m <sup>3</sup> 1685kg/m <sup>3</sup> 1738kg/m <sup>3</sup> 1636kg/m <sup>3</sup> 1711kg/m <sup>3</sup>	--

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [http://www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



## Test Report

No.: SHHG1204010946BM

Date: JUN.15,2012

Page: 7 of 7

### Annex: Single test item corresponding to SGS test NO. list as follows:

TEST REQUESTED	SGS Test NO.
1.RESISTANCE TO CHEMICALS (EN 423:1993)	SHHG1204010967BM
2.EFFECT OF A CASTOR CHAIR (EN425:1994)	SHHG1204010966BM
3.SIDE LENGTH,SQUARENESS AND STRAIGHTNESS OF TILES (EN 427:1994)	SHHG1205013757BM
4.OVERALL THICKNESS(EN428:1993)	SHHG1204010964BM
5.THE THICKNESS OF LAYERS (EN 429:1993)	SHHG1204010963BM
6.MASS PER UNIT AREA(EN 430:1994)	SHHG1205013752BM
7.PEELING STRENGTH OF LAYERS (EN 431:1994)	SHHG1204010961BM
8.RESIDUAL INDENTATION AFTER STATIC LOADING(EN433:1994)	SHHG1204010960BM
9.DIMENSIONAL STABILITY AND CURING AFTER EXPOSURE TO HEAT (EN434:1994)	SHHG1205013751BM
10.DETERMINATION OF FLEXIBILITY(EN435:1994)	SHHG1204010958BM
11.WEAR RESISTANCE(EN660-2:1999)	SHHG1204010957BM
12.RESILIENT,TEXTILE AND LAMINATE FLOOR COVERINGS –CLASSIFICATION(EN685:2007)	SHHG1204010956BM
13.COLOR FASTNESS TO LIGHT (EN20105- B02:1999)	SHHG1204010955BM
14. 8 TOXIC ELEMENT TEST (EN 71-3:1995)	SHHG1204010954BM
15.REACTION OF FIRE TEST(EN13501-1:2007)	SHHG1204010953BM
16.SLIP RESISTANCE TEST(DIN 51130:2010)	SHHG1204010952BM
17.DYNAMIC COEFFICIENT OF FRICTION ON DRY FLOOR SURFACES (EN13893:2002)	SHHG1204010951BM
18.PHTHALATE CONCENTRATION(EN14372:2004)	SHHG1204010950BM
19.FUNGUS TEST(ASTM G21:1999)	SHHG1204010949BM
20.DETERMINATION OF DENSITY(EN436:1994)	SHHG1205013753BM

\*\*\*End of Report\*\*\*

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [http://www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Test Report  
(SVHC)**

No. SHAHG1512973401

Date: 10 Jul 2015

Page 1 of 14



The following sample(s) was/were submitted and identified on behalf of the clients as :  
THICKNESS:5.0MM;WEARLAYER:0.7MM

SGS Job No. : SHHG1506021651SD - SH

Manufacturer :

Style No. : JH-C2107-1

Date of Sample Received : 03 Jul 2015

Testing Period : 03 Jul 2015 - 10 Jul 2015

Test Requested : As requested by client, SVHC screening is performed according to:  
(i) One hundred and sixty three (163) substances in the Candidate List of Substances of Very High Concern (SVHC) for authorization published by European Chemicals Agency (ECHA) on and before Jun 15, 2015 regarding Regulation (EC) No 1907/2006 concerning the REACH.

Test Results : Please refer to next page(s).

Summary :

According to the specified scope and analytical techniques, concentrations of tested SVHC are $\leq 0.1\%$ (w/w) in the submitted sample.	PASS
---	------

Signed for and on behalf of  
SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Serena Wang  
Approved Signatory



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.  
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.  
Testing Center

3<sup>rd</sup> Building, No.889 Yishan Road Xuhui District, Shanghai China 200233  
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

t E&E (86-21) 61402553 f E&E (86-21) 64953679 www.sgsgroup.com.cn  
t HL (86-21) 61402594 f HL (86-21) 61156899 e [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

## Test Report (SVHC)

No. SHAHG1512973401

Date: 10 Jul 2015

Page 2 of 14

### Remark :

(1) The chemical analysis of specified SVHC is performed by means of currently available analytical techniques against the following SVHC related documents published by ECHA:  
<http://echa.europa.eu/web/guest/candidate-list-table>  
These lists are under evaluation by ECHA and may subject to change in the future.

(2) Concerning article(s):

In accordance with Regulation (EC) No 1907/2006, any EU producer or importer of articles shall notify ECHA, in accordance with paragraph 4 of Article 7, if a substance meets the criteria in Article 57 and is identified in accordance with Article 59(1) of the Regulation, if (a) the substance in the Candidate List is present in those articles in quantities totaling over one tonne per producer or importer per year; and (b) the substance in the Candidate List is present in those articles above a concentration of 0.1% weight by weight (w/w).

Article 33 of Regulation (EC) No 1907/2006 requires supplier of an article containing a substance meeting the criteria in Article 57 and identified in accordance with Article 59(1) in a concentration above 0.1% weight by weight (w/w) shall provide the recipient of the article with sufficient information, available to the supplier, to allow safe use of the article including, as a minimum, the name of that substance in the Candidate List.

SGS adopts the interpretation of ECHA for SVHC in article unless indicated otherwise. Detail explanation is available at the following link:

[http://webstage.contribute.sgs.net/corpreach/documents/SGS-CTS\\_SVHC-paper-EN-11.pdf](http://webstage.contribute.sgs.net/corpreach/documents/SGS-CTS_SVHC-paper-EN-11.pdf)

(3) Concerning material(s):

Test results in this report are based on the tested sample. This report refers to testing result of tested sample submitted as homogenous material(s). In case such material is being used to compose an article, the results indicated in this report may not represent SVHC concentration in such article. If this report refers to testing result of composite material group by equal weight proportion, the material in each composite test group may come from more than one article.

If the sample is a substance or mixture, and it directly exports to EU, client has the obligation to comply with the supply chain communication obligation under Article 31 of Regulation (EC) No. 1907/2006 and the conditions of Authorization of substance of very high concern included in the Annex XIV of the Regulation (EC) No. 1907/2006.

(4) Concerning substance and preparation:

If a SVHC is found over 0.1% (w/w) and/or the specific concentration limit which is set in Regulation (EC) No 1272/2008 and No 790/2009, client is suggested to prepare a Safety Data Sheet (SDS) against the SVHC to comply with the supply chain communication obligation under Regulation (EC) No 1907/2006, in which:

- a substance that is classified as hazardous under the CLP Regulation (EC) No 1272/2008.

- a mixture that is classified as dangerous according Dangerous Preparations Directive



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.  
**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com**

SGS-CTC Standards Technical Service (Shanghai) Co., Ltd.  
Testing Center

3<sup>rd</sup> Building, No.889 Yishan Road Xuhui District, Shanghai China 200233

tE&E (86-21) 61402553 fE&E (86-21) 64953679 www.sgs.com.cn

中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

tHL (86-21) 61402594 fHL (86-21) 61156899 e sgs.china@sgs.com



## Test Report (SVHC)

No. SHAHG1512973401

Date: 10 Jul 2015

Page 3 of 14

1999/45/EC or classified as hazardous under the CLP Regulation (EC) No 1272/2008, when their concentrations are equal to, or greater than, those defined in the Article 3(3) of 1999/45/EC or the lower values given in Part 3 of Annex VI of Regulation (EC) No. 1272/2008; or

- a mixture is not classified as dangerous under Directive 1999/45/EC, but contains either:
  - (a) a substance posing human health or environmental hazards in an individual concentration of  $\geq 1\%$  by weight for mixtures that are solid or liquids (i.e., non-gaseous mixtures) or  $\geq 0.2\%$  by volume for gaseous mixtures; or
  - (b) a substance that is PBT, or vPvB in an individual concentration of  $\geq 0.1\%$  by weight for mixtures that are solid or liquids (i.e., non-gaseous mixtures); or
  - (c) a substance on the SVHC candidate list (for reasons other than those listed above), in an individual concentration of  $\geq 0.1\%$  by weight for non-gaseous mixtures; or
  - (d) a substance for which there are Europe-wide workplace exposure limits.

- (5) If a SVHC is found over the reporting limit, client is suggested to identify the component which contains the SVHC and the exact concentration of the SVHC by requesting further quantitative analysis from the laboratory.

### Test Sample :

#### Sample Description :

Specimen No.	SGS Sample ID	Description
SN1	SHA15-129734.001	White plastic board with black back

### Test Method :

SGS In-House method-SHTC-CHEM-SOP-97-T, SHTC-CHEM-SOP-302-T, Analyzed by ICP-OES, UV-VIS, GC-MS, HPLC-DAD/MS and Colorimetric Method.



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-Technical Services (Shanghai) Co., Ltd.  
Testing Center

3<sup>rd</sup> Building, No.889 Yishan Road Xuhui District, Shanghai China 200233

中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

tE&E (86-21) 61402553 fE&E (86-21) 64953679

tHL (86-21) 61402594 fHL (86-21) 61156899

[www.sgs.com](http://www.sgs.com)

[sgs.china@sgs.com](mailto:sgs.china@sgs.com)

**Test Report  
(SVHC)**

No. SHAHG1512973401

Date: 10 Jul 2015

Page 4 of 14

**Test Result: (Substances in the Candidate List of SVHC)**

Batch	Substance Name	CAS No.	001 Concentration (%)	RL (%)
-	All tested SVHC in candidate list	-	ND	-

Notes :

- (1) The table above only shows detected SVHC, and SVHC that below RL are not reported. Please refer to Appendix for the full list of tested SVHC.
- (2) RL = Reporting Limit. All RL are based on homogenous material  
ND = Not detected (lower than RL), ND is denoted on the SVHC substance.
- (3) <sup>△</sup>CAS No. of diastereoisomers identified ( $\alpha$ -HBCDD,  $\beta$ -HBCDD,  $\gamma$ -HBCDD): 134237-50-6, 134237-51-7, 134237-52-8  
<sup>☆</sup>CAS No. of Hexahydromethylphthalic anhydride, Hexahydro-4-methylphthalic anhydride, Hexahydro-1-methylphthalic anhydride, Hexahydro-3-methylphthalic anhydride: 25550-51-0, 19438-60-9, 48122-14-1, 57110-29-9; EC No. of those: 247-094-1, 243-072-0, 256-356-4, 260-566-1.
- (4) \* The test result is based on the calculation of selected element(s) / marker(s) and to the worst-case scenario. For detail information, please refer to the SGS REACH website: [www.reach.sgs.com/substance-of-very-high-concern-analysis-information-page.htm](http://www.reach.sgs.com/substance-of-very-high-concern-analysis-information-page.htm)  
Calculated concentration of boric compounds are based on the water extractive boron by ICP-OES.  
RL = 0.005% is evaluated for element (i.e. cobalt, arsenic, lead, chromium (VI), aluminum, zirconium, strontium, zinc, antimony, titanium, barium and cadmium respectively), except molybdenum RL=0.0005%, boron RL=0.0025 % (only for Lead bis (tetrafluoroborate)).
- (5) § The substance is proposed for the identification as SVHC only where it contains Michler's ketone (CAS Number: 90-94-8) or Michler's base (CAS Number: 101-61-1)  $\geq 0.1\%$  (w/w).



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.  
**Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com**

SGS-Standard Technical Services (Shanghai) Co., Ltd.  
Testing Center

3<sup>rd</sup> Building, No.889 Yishan Road Xuhui District, Shanghai China 200233  
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

tE&E (86-21) 61402553 fE&E (86-21) 64953679 www.sgsgroup.com.cn  
tHL (86-21) 61402594 fHL (86-21) 61156899 e sgs.china@sgs.com

# Test Report (SVHC)

No. SHAHG1512973401

Date: 10 Jul 2015

Page 5 of 14

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
I	1	4,4' -Diaminodiphenylmethane(MDA)	101-77-9	0.050
I	2	5-tert-butyl-2,4,6-trinitro-m-xylene (musk xylene)	81-15-2	0.050
I	3	Alkanes, C10-13, chloro (Short Chain Chlorinated Paraffins)	85535-84-8	0.050
I	4	Anthracene	120-12-7	0.050
I	5	Benzyl butyl phthalate (BBP)	85-68-7	0.050
I	6	Bis (2-ethylhexyl)phthalate (DEHP)	117-81-7	0.050
I	7	Bis(tributyltin)oxide (TBTO)	56-35-9	0.050
I	8	Cobalt dichloride*	7646-79-9	0.005
I	9	Diarsenic pentaoxide*	1303-28-2	0.005
I	10	Diarsenic trioxide*	1327-53-3	0.005
I	11	Dibutyl phthalate (DBP)	84-74-2	0.050
I	12	Hexabromocyclododecane (HBCDD) and all major diastereoisomers identified ( $\alpha$ -HBCDD, $\beta$ -HBCDD, $\gamma$ -HBCDD) <sup>Δ</sup>	25637-99-4, 3194- 55-6	0.050
I	13	Lead hydrogen arsenate*	7784-40-9	0.005
I	14	Sodium dichromate*	7789-12-0, 10588-01-9	0.005
I	15	Triethyl arsenate*	15606-95-8	0.005
II	16	2,4-Dinitrotoluene	121-14-2	0.050
II	17	Acrylamide	79-06-1	0.050
II	18	Anthracene oil*	90640-80-5	0.050
II	19	Anthracene oil, anthracene paste*	90640-81-6	0.050
II	20	Anthracene oil, anthracene paste, anthracene fraction*	91995-15-2	0.050



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-Standard Technical Services (Shanghai) Co., Ltd.  
Testing Center

3<sup>rd</sup> Building, No.889 Yishan Road Xuhui District, Shanghai China 200233  
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

tE&E (86-21) 61402553 fE&E (86-21) 64953679 www.sgs.com.cn  
tHL (86-21) 61402594 fHL (86-21) 61156899 e sgs.china@sgs.com

# Test Report (SVHC)

No. SHAHG1512973401

Date: 10 Jul 2015

Page 6 of 14

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
II	21	Anthracene oil, anthracene paste, distn. lights*	91995-17-4	0.050
II	22	Anthracene oil, anthracene-low*	90640-82-7	0.050
II	23	Diisobutyl phthalate	84-69-5	0.050
II	24	Lead chromate*	7758-97-6	0.005
II	25	Lead chromate molybdate sulphate red (C.I. Pigment Red 104)*	12656-85-8	0.005
II	26	Lead sulfochromate yellow (C.I. Pigment Yellow 34)*	1344-37-2	0.005
II	27	Pitch, coal tar, high temp.*	65996-93-2	0.050
II	28	Tris(2-chloroethyl)phosphate	115-96-8	0.050
III	29	Ammonium dichromate*	7789-09-5	0.005
III	30	Boric acid*	10043-35-3, 11113-50-1	0.005
III	31	Disodium tetraborate, anhydrous*	1303-96-4, 1330-43-4, 12179-04-3	0.005
III	32	Potassium chromate*	7789-00-6	0.005
III	33	Potassium dichromate*	7778-50-9	0.005
III	34	Sodium chromate*	7775-11-3	0.005
III	35	Tetraboron disodium heptaoxide, hydrate*	12267-73-1	0.005
III	36	Trichloroethylene	79-01-6	0.050
IV	37	2-Ethoxyethanol	110-80-5	0.050
IV	38	2-Methoxyethanol	109-86-4	0.050
IV	39	Chromic acid, Oligomers of chromic acid and dichromic acid, Dichromic acid*	7738-94-5 - 13530-68-2	0.005



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS (Shanghai) Standards Technical Services (Shanghai) Co., Ltd.  
Testing Center

3<sup>rd</sup> Building, No. 889 Yishan Road Xuhui District, Shanghai China 200233

中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

tE&E (86-21) 61402553 fE&E (86-21) 64953679

tHL (86-21) 61402594 fHL (86-21) 61156899

[www.sgs.com](http://www.sgs.com)

[sgs.china@sgs.com](mailto:sgs.china@sgs.com)

# Test Report (SVHC)

No. SHAHG1512973401

Date: 10 Jul 2015

Page 7 of 14

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
IV	40	Chromium trioxide*	1333-82-0	0.005
IV	41	Cobalt(II) carbonate*	513-79-1	0.005
IV	42	Cobalt(II) diacetate*	71-48-7	0.005
IV	43	Cobalt(II) dinitrate*	10141-05-6	0.005
IV	44	Cobalt(II) sulphate*	10124-43-3	0.005
V	45	1,2,3-trichloropropane	96-18-4	0.050
V	46	1,2-Benzenedicarboxylic acid, di-C6-8-branched alkyl esters, C7-rich	71888-89-6	0.050
V	47	1,2-Benzenedicarboxylic acid, di-C7-11-branched and linear alkyl esters	68515-42-4	0.050
V	48	1-methyl-2-pyrrolidone	872-50-4	0.050
V	49	2-ethoxyethyl acetate	111-15-9	0.050
V	50	Hydrazine	7803-57-8, 302-01-2	0.050
V	51	Strontium chromate*	7789-06-2	0.005
VI	52	1,2-Dichloroethane	107-06-2	0.050
VI	53	2,2'-dichloro-4,4'-methylenedianiline	101-14-4	0.050
VI	54	2-Methoxyaniline; o-Anisidine	90-04-0	0.050
VI	55	4-(1,1,3,3-tetramethylbutyl)phenol	140-66-9	0.050
VI	56	Aluminosilicate Refractory Ceramic Fibres *	650-017-00-8 (Index no.)	0.005
VI	57	Arsenic acid*	7778-39-4	0.005
VI	58	Bis(2-methoxyethyl) ether	111-96-6	0.050
VI	59	Bis(2-methoxyethyl) phthalate	117-82-8	0.050



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-Standard Technical Services (Shanghai) Co., Ltd.  
Testing Center

3<sup>rd</sup> Building, No. 889 Yishan Road Xuhui District, Shanghai China 200233  
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

tE&E (86-21) 61402553 fE&E (86-21) 64953679 www.sgs.com.cn  
tHL (86-21) 61402594 fHL (86-21) 61156899 e [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

# Test Report (SVHC)

No. SHAHG1512973401

Date: 10 Jul 2015

Page 8 of 14

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
VI	60	Calcium arsenate*	7778-44-1	0.005
VI	61	Dichromium tris(chromate) *	24613-89-6	0.005
VI	62	Formaldehyde, oligomeric reaction products with aniline	25214-70-4	0.050
VI	63	Lead diazide, Lead azide*	13424-46-9	0.005
VI	64	Lead dipicrate*	6477-64-1	0.005
VI	65	Lead styphnate*	15245-44-0	0.005
VI	66	N,N-dimethylacetamide	127-19-5	0.050
VI	67	Pentazinc chromate octahydroxide*	49663-84-5	0.005
VI	68	Phenolphthalein	77-09-8	0.050
VI	69	Potassium hydroxyoctaoxodizincatedichromate*	11103-86-9	0.005
VI	70	Trilead diarsenate*	3687-31-8	0.005
VI	71	Zirconia Aluminosilicate Refractory Ceramic Fibres*	650-017-00-8 (Index no.)	0.005
VII	72	[4-[[4-anilino-1-naphthyl][4-(dimethylamino)phenyl]methylene]cyclohexa-2,5-dien-1-ylidene] dimethylammonium chloride (C.I. Basic Blue 26)§	2580-56-5	0.050
VII	73	[4-[4,4'-bis(dimethylamino) benzhydrylidene]cyclohexa-2,5-dien-1-ylidene]dimethylammonium chloride (C.I. Basic Violet 3)§	548-62-9	0.050
VII	74	1,2-bis(2-methoxyethoxy)ethane (TEGDME; triglyme)	112-49-2	0.050
VII	75	1,2-dimethoxyethane; ethylene glycol dimethyl ether (EGDME)	110-71-4	0.050
VII	76	4,4'-bis(dimethylamino) benzophenone (Michler's Ketone)	90-94-8	0.050
VII	77	4,4'-bis(dimethylamino)-4''-(methylamino)trityl alcohol§	561-41-1	0.050
VII	78	Diboron trioxide*	1303-86-2	0.005



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS Standards Technical Services (Shanghai) Co., Ltd.  
Testing Center, Shanghai, China

3<sup>rd</sup> Building, No. 889 Yishan Road Xuhui District, Shanghai China 200233  
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

tE&E (86-21) 61402553 fE&E (86-21) 64953679 www.sgs.com.cn  
tHL (86-21) 61402594 fHL (86-21) 61156899 e [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

# Test Report (SVHC)

No. SHAHG1512973401

Date: 10 Jul 2015

Page 9 of 14

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
VII	79	Formamide	75-12-7	0.050
VII	80	Lead(II) bis(methanesulfonate)*	17570-76-2	0.005
VII	81	N,N,N',N'-tetramethyl-4,4'-methylenedianiline (Michler's base)	101-61-1	0.050
VII	82	TGIC (1,3,5-tris(oxiranylmethyl)-1,3,5-triazine-2,4,6(1H,3H,5H)-trione)	2451-62-9	0.050
VII	83	$\alpha,\alpha$ -Bis[4-(dimethylamino)phenyl]-4 (phenylamino)naphthalene-1-methanol (C.I. Solvent Blue 4) §	6786-83-0	0.050
VII	84	$\beta$ -TGIC (1,3,5-tris(2S and 2R)-2,3-epoxypropyl)-1,3,5-triazine-2,4,6-(1H,3H,5H)-trione)	59653-74-6	0.050
VIII	85	[Phthalato(2-)]dioxotrilead*	69011-06-9	0.005
VIII	86	1,2-Benzenedicarboxylic acid, dipentylester, branched and linear	84777-06-0	0.050
VIII	87	1,2-Diethoxyethane	629-14-1	0.050
VIII	88	1-Bromopropane	106-94-5	0.050
VIII	89	3-Ethyl-2-methyl-2-(3-methylbutyl)-1,3-oxazolidine	143860-04-2	0.050
VIII	90	4-(1,1,3,3-tetramethylbutyl)phenol, ethoxylated	-	0.050
VIII	91	4,4'-Methylenedi-o-toluidine	838-88-0	0.050
VIII	92	4,4'-Oxydianiline and its salts	101-80-4	0.050
VIII	93	4-Aminoazobenzene	60-09-3	0.050
VIII	94	4-Methyl-m-phenylenediamine	95-80-7	0.050
VIII	95	4-Nonylphenol, branched and linear	-	0.050
VIII	96	6-Methoxy-m-toluidine	120-71-8	0.050
VIII	97	Acetic acid, lead salt, basic*	51404-69-4	0.005



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-Standard Technical Services (Shanghai) Co., Ltd.  
Testing Center

3<sup>rd</sup> Building, No. 889 Yishan Road Xuhui District, Shanghai China 200233  
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

tE&E (86-21) 61402553 fE&E (86-21) 64953679 www.sgs.com.cn  
tHL (86-21) 61402594 fHL (86-21) 61156899 e [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

# Test Report (SVHC)

No. SHAHG1512973401

Date: 10 Jul 2015

Page 10 of 14

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
VIII	98	Biphenyl-4-ylamine	92-67-1	0.050
VIII	99	Bis(pentabromophenyl) ether (DecaBDE)	1163-19-5	0.050
VIII	100	Cyclohexane-1,2-dicarboxylic anhydride, cis-cyclohexane-1,2-dicarboxylic anhydride, trans-cyclohexane-1,2-dicarboxylic anhydride	85-42-7, 13149-00-3, 14166-21-3	0.050
VIII	101	Diazene-1,2-dicarboxamide (C,C'-azodi(formamide))	123-77-3	0.050
VIII	102	Dibutyltin dichloride (DBTC)	683-18-1	0.050
VIII	103	Diethyl sulphate	64-67-5	0.050
VIII	104	Diisopentylphthalate	605-50-5	0.050
VIII	105	Dimethyl sulphate	77-78-1	0.050
VIII	106	Dinoseb	88-85-7	0.050
VIII	107	Dioxobis(stearato)trilead*	12578-12-0	0.005
VIII	108	Fatty acids, C16-18, lead salts*	91031-62-8	0.005
VIII	109	Furan	110-00-9	0.050
VIII	110	Henicosafuoroundecanoic acid	2058-94-8	0.050
VIII	111	Heptacosafuorotetradecanoic acid	376-06-7	0.050
VIII	112	Hexahydromethylphthalic anhydride, Hexahydro-4-methylphthalic anhydride, Hexahydro-1-methylphthalic anhydride, Hexahydro-3-methylphthalic anhydride	☆	0.050
VIII	113	Lead bis(tetrafluoroborate)*	13814-96-5	0.005
VIII	114	Lead cyanamidate*	20837-86-9	0.005
VIII	115	Lead dinitrate*	10099-74-8	0.005
VIII	116	Lead monoxide*	1317-36-8	0.005



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS Standards Technical Services (Shanghai) Co., Ltd.  
Testing Center

3<sup>rd</sup> Building, No. 889 Yishan Road Xuhui District, Shanghai China 200233  
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

tE&E (86-21) 61402553 fE&E (86-21) 64953679 www.sgs.com.cn  
tHL (86-21) 61402594 fHL (86-21) 61156899 e [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



# Test Report (SVHC)

No. SHAHG1512973401

Date: 10 Jul 2015

Page 11 of 14

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
VIII	117	Lead oxide sulfate*	12036-76-9	0.005
VIII	118	Lead tetroxide (orange lead)*	1314-41-6	0.005
VIII	119	Lead titanium trioxide*	12060-00-3	0.005
VIII	120	Lead titanium zirconium oxide*	12626-81-2	0.005
VIII	121	Methoxyacetic acid	625-45-6	0.050
VIII	122	Methyloxirane (Propylene oxide)	75-56-9	0.050
VIII	123	N,N-dimethylformamide	68-12-2	0.050
VIII	124	N-Methylacetamide	79-16-3	0.050
VIII	125	N-Pentyl-isopentylphthalate	776297-69-9	0.050
VIII	126	o-Aminoazotoluene	97-56-3	0.050
VIII	127	o-Toluidine	95-53-4	0.050
VIII	128	Pentacosafuorotridecanoic acid	72629-94-8	0.050
VIII	129	Pentalead tetraoxide sulphate*	12065-90-6	0.005
VIII	130	Pyrochlore, antimony lead yellow*	8012-00-8	0.005
VIII	131	Silicic acid, barium salt, lead-doped*	68784-75-8	0.005
VIII	132	Silicic acid, lead salt*	11120-22-2	0.005
VIII	133	Sulfurous acid, lead salt, dibasic*	62229-08-7	0.005
VIII	134	Tetraethyllead*	78-00-2	0.005
VIII	135	Tetralead trioxide sulphate*	12202-17-4	0.005
VIII	136	Tricosafuorododecanoic acid	307-55-1	0.050
VIII	137	Trilead bis(carbonate)dihydroxide (basic lead carbonate)*	1319-46-6	0.005



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CTC Standards Technical Services (Shanghai) Co., Ltd.  
Testing Center, Technical Services Company.

3<sup>rd</sup> Building, No. 889 Yishan Road Xuhui District, Shanghai China 200233  
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

tE&E (86-21) 61402553 fE&E (86-21) 64953679 www.sgs.com.cn  
tHL (86-21) 61402594 fHL (86-21) 61156899 e [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

# Test Report (SVHC)

No. SHAHG1512973401

Date: 10 Jul 2015

Page 12 of 14

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
VIII	138	Trilead dioxide phosphonate*	12141-20-7	0.005
IX	139	4-Nonylphenol, branched and linear, ethoxylated	-	0.050
IX	140	Ammonium pentadecafluorooctanoate (APFO)	3825-26-1	0.050
IX	141	Cadmium oxide*	1306-19-0	0.005
IX	142	Cadmium*	7440-43-9	0.005
IX	143	Dipentyl phthalate (DPP)	131-18-0	0.050
IX	144	Pentadecafluorooctanoic acid (PFOA)	335-67-1	0.050
X	145	Cadmium sulphide*	1306-23-6	0.005
X	146	Dihexyl phthalate	84-75-3	0.050
X	147	Disodium 3,3'-[[1,1'-biphenyl]-4,4'-diylbis(azo)]bis(4-aminonaphthalene-1-sulphonate) (C.I. Direct Red 28)	573-58-0	0.050
X	148	Disodium 4-amino-3-[[4'-[(2,4-diaminophenyl)azo][1,1'-biphenyl]-4-yl]azo]-5-hydroxy-6-(phenylazo)naphthalene-2,7-disulphonate (C.I. Direct Black 38)	1937-37-7	0.050
X	149	Imidazolidine-2-thione; (2-imidazoline-2-thiol)	96-45-7	0.050
X	150	Lead di(acetate)*	301-04-2	0.005
X	151	Trixylyl phosphate	25155-23-1	0.050
XI	152	1,2-Benzenedicarboxylic acid, dihexyl ester, branched and linear	68515-50-4	0.05
XI	153	Cadmium chloride*	10108-64-2	0.005
XI	154	Sodium perborate; perboric acid, sodium salt*	-	0.005
XI	155	Sodium peroxometaborate*	7632-04-4	0.005



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS (Shanghai) Standards Technical Service (Shanghai) Co., Ltd.  
Testing Center

3<sup>rd</sup> Building, No. 889 Yishan Road Xuhui District, Shanghai China 200233  
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

tE&E (86-21) 61402553 fE&E (86-21) 64953679 www.sgs.com.cn  
tHL (86-21) 61402594 fHL (86-21) 61156899 e sgs.china@sgs.com

# Test Report (SVHC)

No. SHAHG1512973401

Date: 10 Jul 2015

Page 13 of 14

## Appendix

### Full list of tested SVHC:

Batch	No.	Substance Name	CAS No.	RL (%)
XII	156	2-(2H-benzotriazol-2-yl)-4,6-ditertpentylphenol (UV-328)	25973-55-1	0.050
XII	157	2-benzotriazol-2-yl-4,6-di-tert-butylphenol (UV-320)	3846-71-7	0.050
XII	158	2-ethylhexyl 10-ethyl-4,4-dioctyl-7-oxo-8-oxa-3,5-dithia-4-stannatetradecanoate (DOTE)	15571-58-1	0.050
XII	159	Cadmium fluoride*	7790-79-6	0.005
XII	160	Cadmium sulphate*	10124-36-4,31119-53-6	0.005
XII	161	Reaction mass of 2-ethylhexyl 10-ethyl-4,4-dioctyl-7-oxo-8-oxa-3,5-dithia-4-stannatetradecanoate & 2-ethylhexyl 10-ethyl-4-[[2-[(2-ethylhexyl)oxy]-2-oxoethyl]thio]-4-octyl-7-oxo-8-oxa-3,5-dithia-4-stannatetradecanoate (reaction mass of DOTE & MOTE)		0.050
XIII	162	1,2-benzenedicarboxylic acid, di-C6-10-alkyl esters; 1,2-benzenedicarboxylic acid, mixed decyl and hexyl and octyl diesters with ≥ 0.3% of dihexyl phthalate	68515-51-5,68648-93-1	0.050
XIII	163	5-sec-butyl-2-(2,4-dimethylcyclohex-3-en-1-yl)-5-methyl-1,3-dioxane [1], 5-sec-butyl-2-(4,6-dimethylcyclohex-3-en-1-yl)-5-methyl-1,3-dioxane [2] [covering any of the individual isomers of [1] and [2] or any combination thereof]		0.050



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-Standard Technical Services (Shanghai) Co., Ltd.  
Testing Center

3<sup>rd</sup> Building, No.889 Yishan Road Xuhui District, Shanghai China 200233  
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

tE&E (86-21) 61402553 fE&E (86-21) 64953679 www.sgs.com.cn  
tHL (86-21) 61402594 fHL (86-21) 61156899 e [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

## Test Report (SVHC)

No. SHAHG1512973401

Date: 10 Jul 2015

Page 14 of 14

Sample photo:



SGS authenticate the photo on original report only

\*\*\* End of Report \*\*\*



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN\\_Doccheck@sgs.com](mailto:CN_Doccheck@sgs.com)

**Test Report**

Report Number: 151215003SHF-BP-21

Applicant Name: 

Original Report Date: January 20, 2016

**Sample Description:**

Product: LOOSE LAY  
Model: 6"X48"X5.0mm\*0.5mm; 18"X36"X5.0mm\*0.5mm  
Samples Quantity: 63 pieces  
Sample ID: S151215003SHF-001~063  
Date Received: 2015-12-11  
Date Test Conducted: 2015-12-15~2016-01-20




**Tests Conducted:**

Test Methods: Please see next page(s)

**Conclusion:**

For details refer to attached page(s). The conclusions of this test report may not be used as part of the requirements for Intertek product certification. Authority to Mark must be issued for a product to become certified.

Should you have any queries about the test report, please contact:

Approved by:	Checked by:	Prepared by:
 Sun Sun Assistant Manager	 Jodie Zhou Senior Technical supervisor	 Sally Xie Technical supervisor

## Test Report

Report Number: 151215003SHF-BP-21

### Test Items, Method and Results:

Table 1 Test result of model 6"X48"X5.0mm\*0.5mm based on ASTM F1700-13a

Test Item	Test Method	Test Result	Test Requirement	Verdict
Size	ASTM F2055-10	Claimed Length: 1219.2mm Width: 152.4mm Tested Length: 1218.48mm Width: 152.33mm	A tolerance of $\pm 0.4\text{mm}/305\text{mm}$	Pass
Thickness	ASTM F386-11	Claimed value: 5.0mm Average: 5.04mm Min.: 5.00mm Max.: 5.06mm	A tolerance of $\pm 0.13\text{mm}$	Pass
Squareness	ASTM F2055-10	Short edge Max.: 0.06mm/152mm Long edge Max.: 0.16mm/600mm	$\leq 0.25\text{mm}/305\text{mm}$	Pass

## Test Report

Report Number:151215003SHF-BP-21

Table 2 Test result of model 18"X36"X5.0mm\*0.5mm based on ASTM F1700-13a

Test Item	Test Method	Test Result	Test Requirement in	Verdict
Size	ASTM F2055-10	Claimed Length: 914.4mm Width: 457.2mm Tested Length: 914.43mm Width: 457.45mm	A tolerance of $\pm 0.4\text{mm}/305\text{mm}$	Pass
Thickness	ASTM F386-11	Claimed value: 5.0mm Average: 5.06mm Min.: 5.05mm Max.:5.08mm	A tolerance of $\pm 0.13\text{mm}$	Pass
Thickness of wear layer	ASTM F410-08(2013)	Average: 0.50mm	Commercial, 0.5mm min	Pass
Squareness	ASTM F2055-10	Short edge Max.: 0.16mm/400mm Long edge Max.: 0.16mm/600mm	$\leq 0.25\text{mm}/305\text{mm}$	Pass
Residual indentation	ASTM F1914-07(2011)	Average: 6.9% Max. : 7.3%	Average $\leq 8\%$ Max $\leq 10\%$	Pass
Flexibility	ASTM F137-08(2013)	No crack or break when using $\Phi 25.4\text{mm}$ mandrel	No crack or break when using $\Phi 25.4\text{mm}$ mandrel	Pass
Dimension Stability	ASTM F2199-09	MD Max.: 0.06mm/180mm CMD Max.: 0.14mm/180mm	$\leq 0.51\text{mm}/305\text{mm}$	Pass
Resistance to Chemicals	ASTM F925-13	See Appendix B for details	No more than a slight change in surface dulling, surface attack or staining	Pass
Resistance to Heat	ASTM F1514-03(2013)	$\Delta E^* = 0.30$	$\Delta E^*$ shall not greater than 8.0 after 7 days exposure to $70^\circ\text{C}$	Pass
Resistance to Light	ASTM F1515-03(2008)	$\Delta E^* = 1.81$	$\Delta E^*$ shall not greater than 8.0 after a 300h exposure	Pass

## Test Report

Report Number: 151215003SHF-BP-21

Table 3 Test result of model 18"X36"X5.0mm\*0.5mm based on other standards

Test Item	Test Method	Test Result
Formaldehyde content	ASTM D6007-14	ND Detection limit =0.02 ppm
Castor chair resistance	NALFA/ANSI LF-11	No visible damage after 25000 revolutions
Coefficient of friction	ASTM D2394-05(2011)	Static Coefficient of friction Dry: 0.58, Wet: 0.74 Sliding Coefficients of Friction Dry: 0.51, Wet: 0.69
Static coefficient of friction	ASTM C1028-07e1	Dry: 0.83 Wet: 0.65
Static load	ASTM F970-07(2011)	Applied load: 250lb Residual indentation: 0.05mm
Abrasion resistance	ASTM D4060-14	Type of wheels: CS-17 Load: 1000g Revolutions: 1000 Mass loss: 39.5mg
Fungi resistance <sup>1</sup>	ASTM G21-13	Rating 0 Observed Growth on Specimens: None

Note:

1. The test was conducted at the external approved/qualified facility, located at [Guangzhou].




Test Report

Report Number:151215003SHF-BP-21

Appendix A: Sample photos



Model 6"X48"X5.0mm\*0.5mm

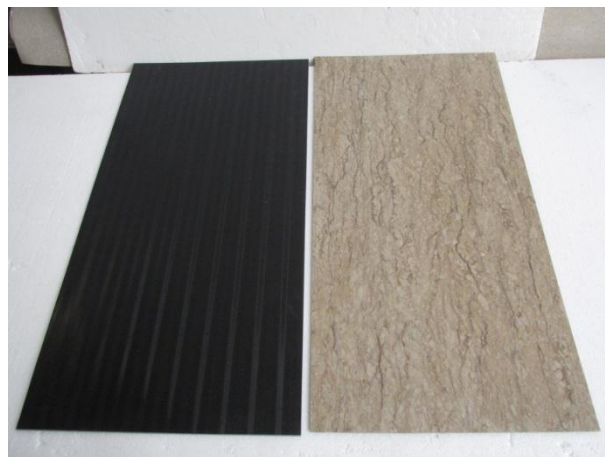

Model 18"X36"X5.0mm\*0.5mm

Fig.1-2 Sample received

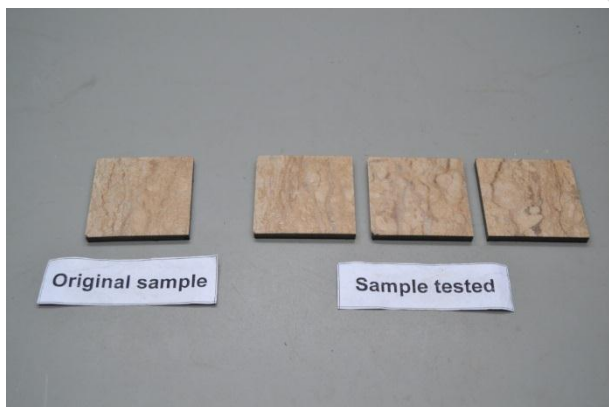


Fig.3 After resistance to heat test



Fig.4 After resistance to light test



Fig.4 After fungi test

# Test Report

Report Number: 151215003SHF-BP-21

## Appendix B

### Test result of Resistance to Chemicals

Reagent	Rating		
	Surface attack	Color change	Surface dulling
White vinegar (5% acetic acid)	0	0	0
Rubbing alcohol (70% isopropyl alcohol)	0	0	0
White mineral oil (medicinal grade)	0	0	0
Sodium hydroxide solution (5% NaOH)	0	0	0
Hydrochloric acid solution (5% HCl)	0	0	0
Sulfuric acid solution (5% H <sub>2</sub> SO <sub>4</sub> )	0	0	0
Household ammonia solution (5% NH <sub>4</sub> OH)	0	0	0
Household bleach (5.25% NaOCl)	0	0	0
Olive oil (light)	0	0	0
Kerosene (K1)	0	0	0
Unleaded gasoline (regular grade)	0	0	0
Phenol (5% active phenol)	0	0	0

**Notes:**

According to ASTM F925-13, rating 0-3 represents:

0 = no change; 1 = slight change; 2 = moderate change; 3 = severe change.

Surface Dulling - Indicating that the specimen suffered from a loss of gloss,

Color Change - Indicating that the specimen suffered discoloration or bleaching, or both, and

Surface Attack - Indicating that the specimen suffered surface damage such as softening, warping, swelling, blistering, peeling, raised or rough area.

The End of Report

*This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.*



The following sample(s) was/were submitted and identified on behalf of the clients as : JH-LVT, LUXURY VINYL TILE, FLOORING USED INDOOR

SGS Job No. : SHHG1512052469SD - SH

Manufacturer :

Country of Destination : NETHERLANDS

Style No. : JH-6005-1

Date of Sample Received : 31 Dec 2015

Testing Period : 31 Dec 2015 - 06 Jan 2016

Test Requested : Selected test(s) as requested by client.

Test Method : Please refer to next page(s).

Test Results : Please refer to next page(s).

Result Summary :

Test Requested	Conclusion
US California Proposition 65- Phthalate content	PASS

Signed for and on behalf of  
SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Serena Wang  
Approved Signatory



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

# Test Report

No. SHAHG1527187401

Date: 06 Jan 2016

Page 2 of 3

Test Results :

## Test Part Description :

Specimen No.	SGS Sample ID	Description
SN1	SHA15-271874.001	Grey plastic board with black

Remarks :

- (1) 1 mg/kg = 0.0001%
- (2) MDL = Method Detection Limit
- (3) ND = Not Detected ( < MDL )
- (4) "-" = Not Regulated

## US California Proposition 65- Phthalate content

Test Method : With reference to CPSC-CH-C1001-09.3. Analysis was performed by GC-MS.

Test Item(s)	CAS NO.	Limit	Unit	MDL	001
Dibutyl Phthalate (DBP)	84-74-2	1000	mg/kg	50	ND
Benzylbutyl Phthalate (BBP)	85-68-7	1000	mg/kg	50	ND
Bis-(2-ethylhexyl) Phthalate (DEHP)	117-81-7	1000	mg/kg	50	ND
Diisononyl Phthalate (DINP)	28553-12-0	1000	mg/kg	50	ND
Di-n-octyl Phthalate (DNOP)	117-84-0	1000	mg/kg	50	ND
Diisodecyl Phthalate (DIDP)	26761-40-0	1000	mg/kg	50	ND
	/68515-48-0				
	/68515-49-1				

Conclusion

PASS

Notes :

- (1) The limit for phthalates is referenced to the requirement stated in County of Marin Court Case No.: CIV 091150, County of Solano Court Case No.: FCS-033234 and Public Law (Consumer Product Safety Improvement Act of 2008, CPSIA).
  - (2) The reference limit applied in testing is based on particular prop 65 settlements that are most similar to the tested product in the opinion of the lab. The testing in this report does not reflect a user's actual exposure to the tested chemical.
- A manufacturer or retailer that is not named in the referenced settlement is not bound by that settlement, and may choose to comply with Proposition 65 by clearly informing the consumer of potential exposure.



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS Standards Technical Services (Shanghai) Co., Ltd.  
Testing Center

3<sup>rd</sup> Building, No. 889 Yishan Road Xuhui District, Shanghai China 200233  
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

tE&E (86-21) 61402553 fE&E (86-21) 64953679 www.sgs.com.cn  
tHL (86-21) 61402594 fHL (86-21) 61156899 e [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

Sample photo:

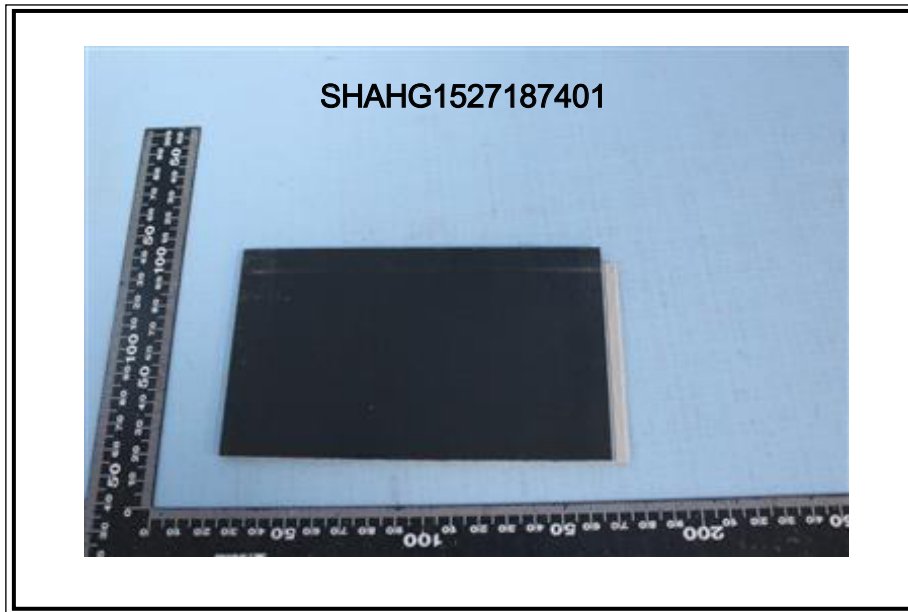

SGS authenticate the photo on original report only

\*\*\* End of Report \*\*\*



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)